

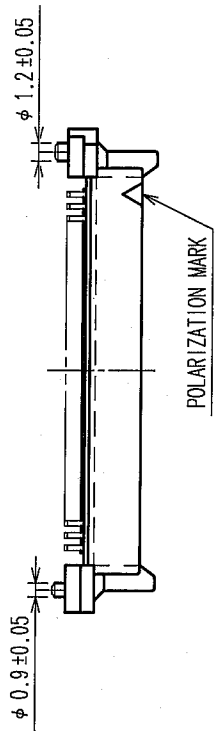
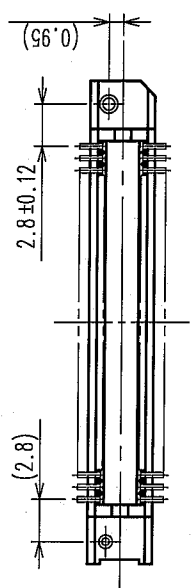
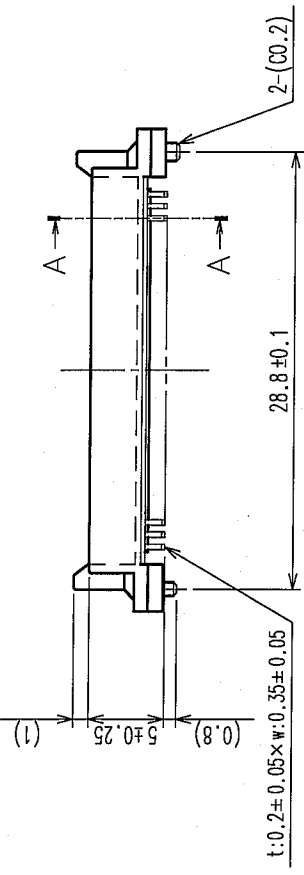
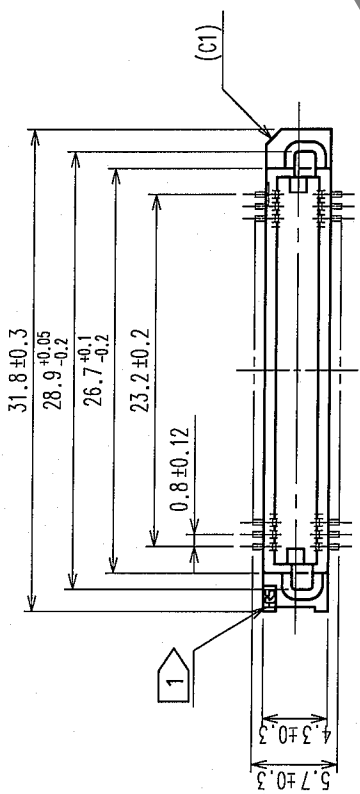



COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△						△				
	△						△				
	△						△				
	△						△				



RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

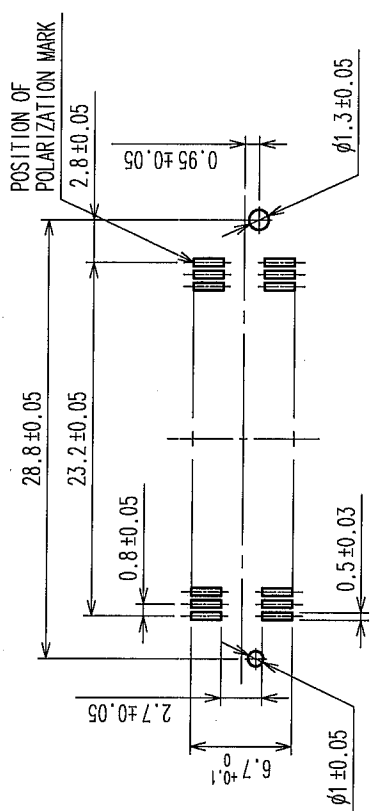

A-A(10:1)

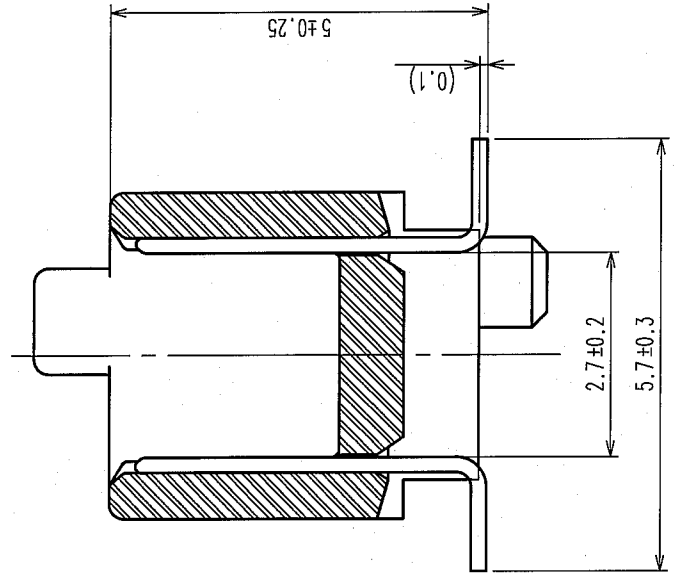

- NOTE 1 ∇ IR5 MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
 - 4 SEE NEXT PAGE FOR DETAILS.
 - 5 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
 - 6 SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 7 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 8 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)		2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWN		DESIGNED		CHECKED	APPROVED
		K. NAKAMURA		K. NAKAMURA		K. Ogawa	H. Ogawa
		06.01.24		06.01.24		06.01.25	06.01.25
DRAWING NO.		PART NO.		FX6-60P-0.8SV1 (93)			
EDC3-084969-23							
SCALE							
2 : 1							
UNITS							
mm							
HRS		HIROSE ELECTRIC CO., LTD		CODE NO.		CL576-0025-1-93	
						1/2	

