

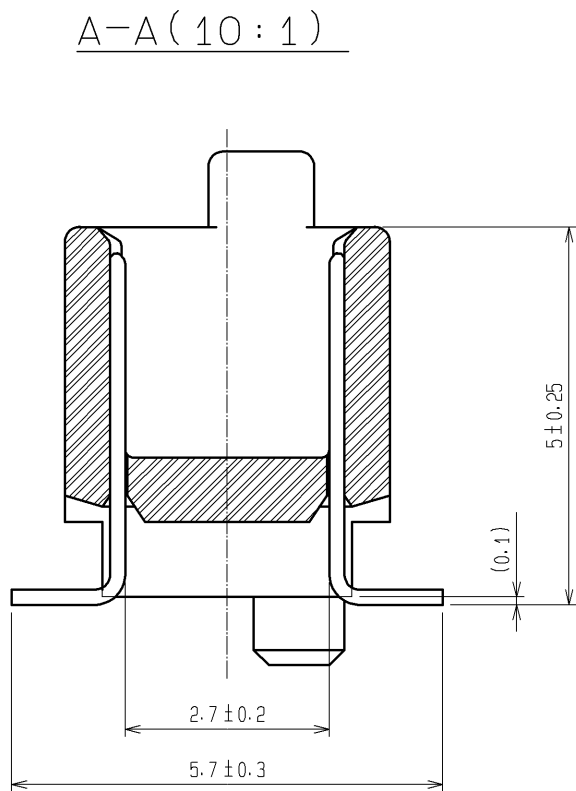
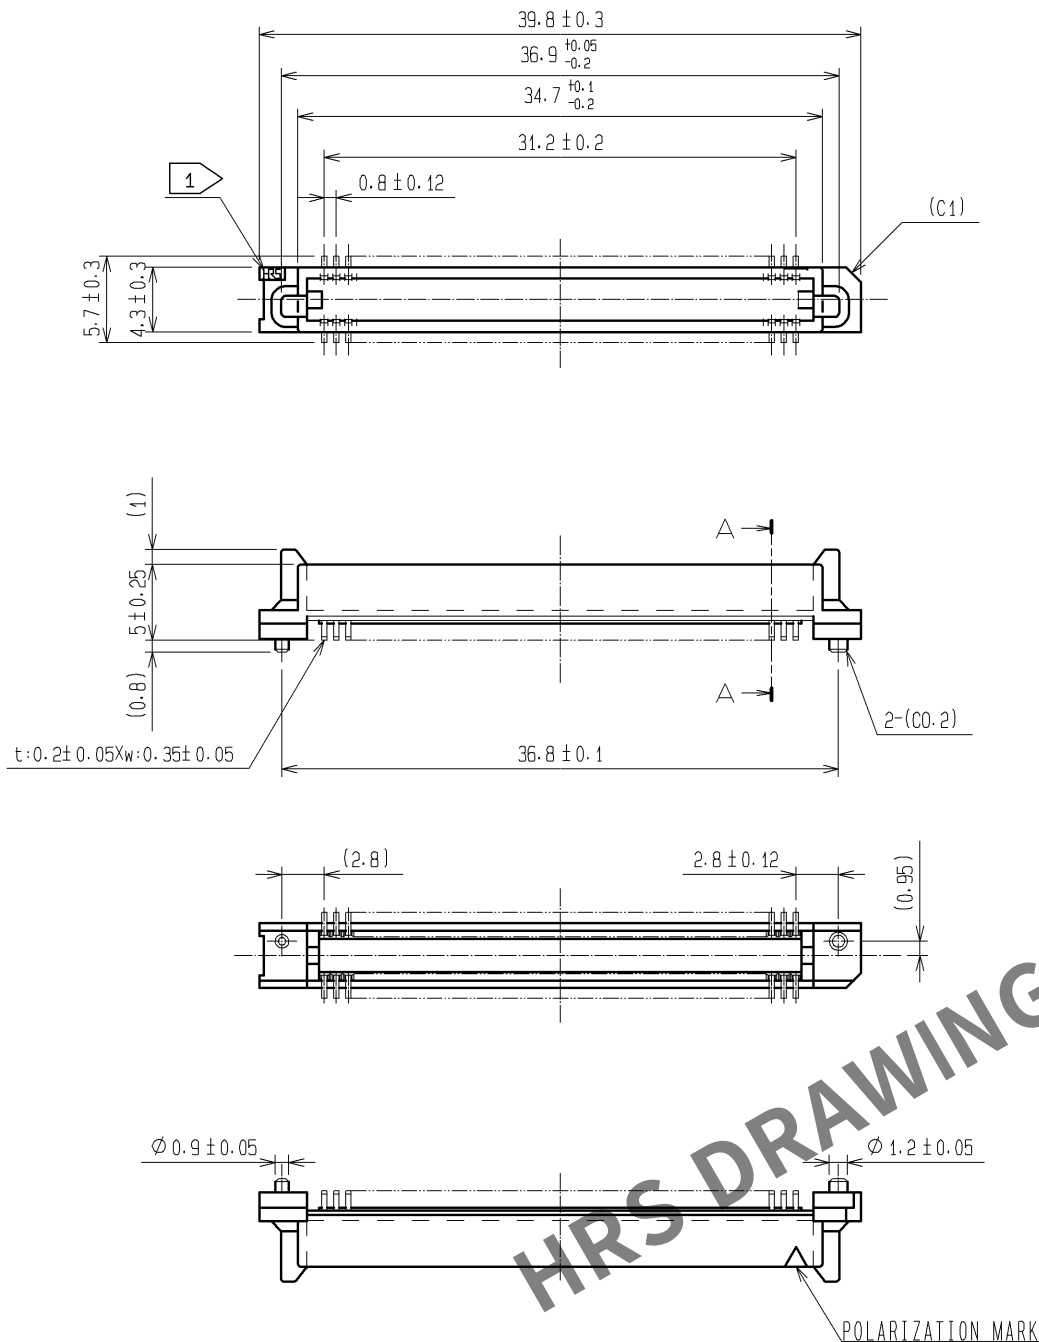


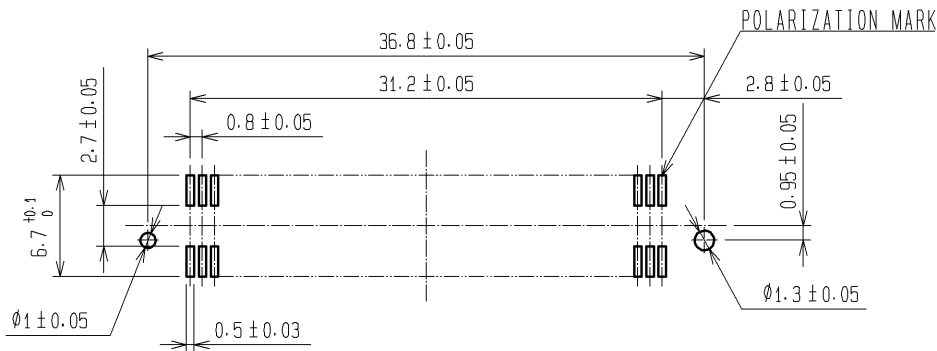

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS $t=0.15$)



- NOTES ① HRS MARK SHOULD BE OPTIONAL.
2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μ m min.			
						LEAD AREA:TIN-PLATING 1 μ m min.			
						UNDER PLATING:NICKEL 1 μ m min.			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	:HS. OKAWA		08. 06. 26	DRAWING NO.		EDC3-084972-25	
		CHECED	:HT. YAMAGUCHI		08. 06. 25	PART NO.		FX6-80P-0. 8SV1(71)	
		DESIGNED	:SY. KAMIGA		08. 06. 23	CODE NO.		CL576-0027-7-71	
		DRAWN	:TP. MATSUMOTO		08. 06. 18				