

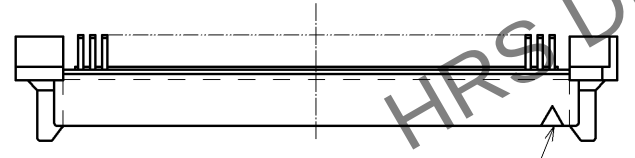
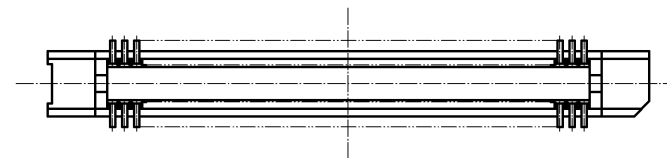
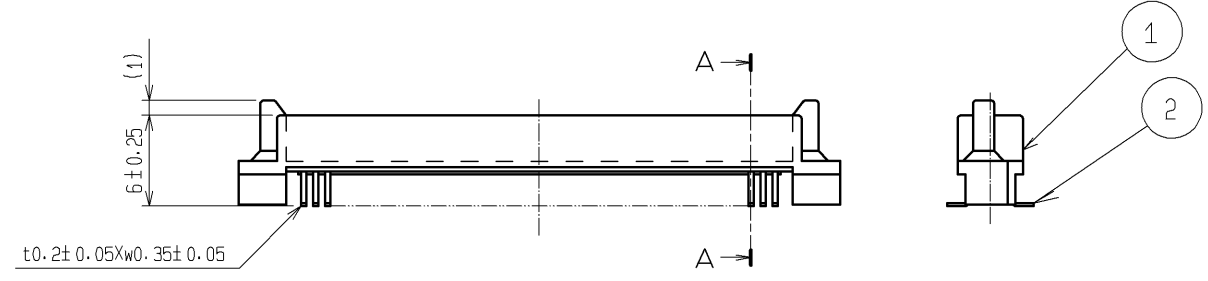


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

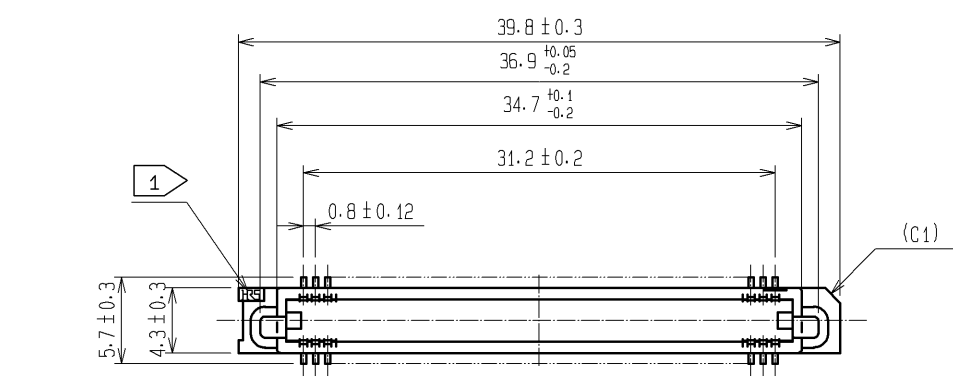


POLARIZATION MARK


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS t=0.15)

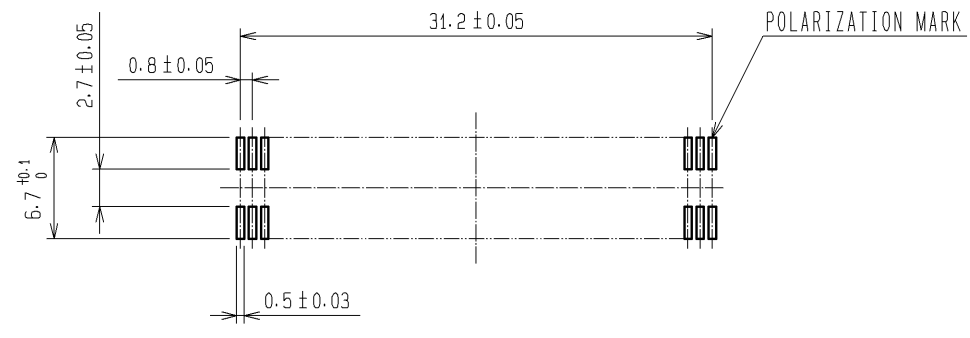

A-A (10:1)

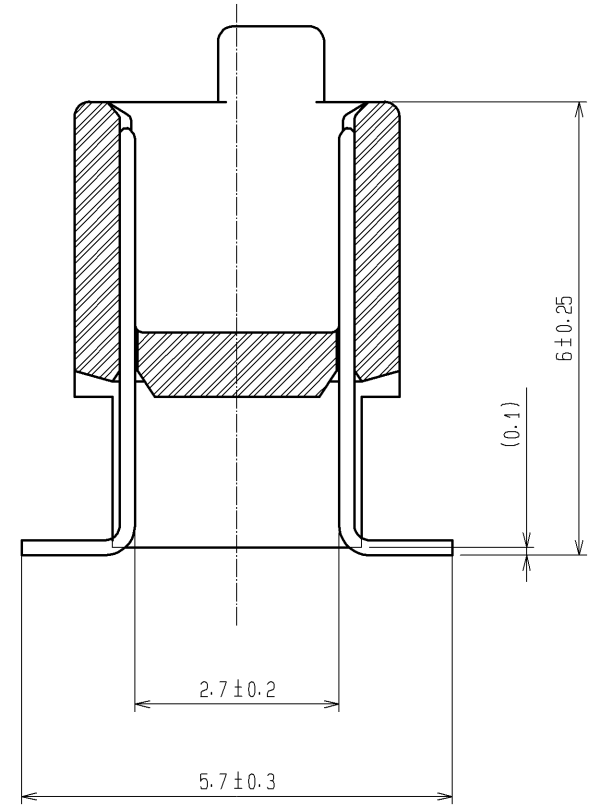

- NOTES
1. HRS MARK SHOULD BE OPTIONAL.
 2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN		UL94V-0		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.									
								LEAD AREA:TIN-PLATING 1μm min.									
								UNDER PLATING:NICKEL 1μm min.									
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		05.11.01		DRAWING NO.		EDC3-071331-25									
		CHECED : HS. OZAWA		05.11.01		PART NO.		FX6A-80P-0.8SV2(71)									
		DESIGNED : TK. YANAGISAWA		05.11.01		CODE NO.		CL576-0247-3-71									
		DRAWN : TK. YANAGISAWA		05.11.01													
														 1/1			

5

6

7

8