

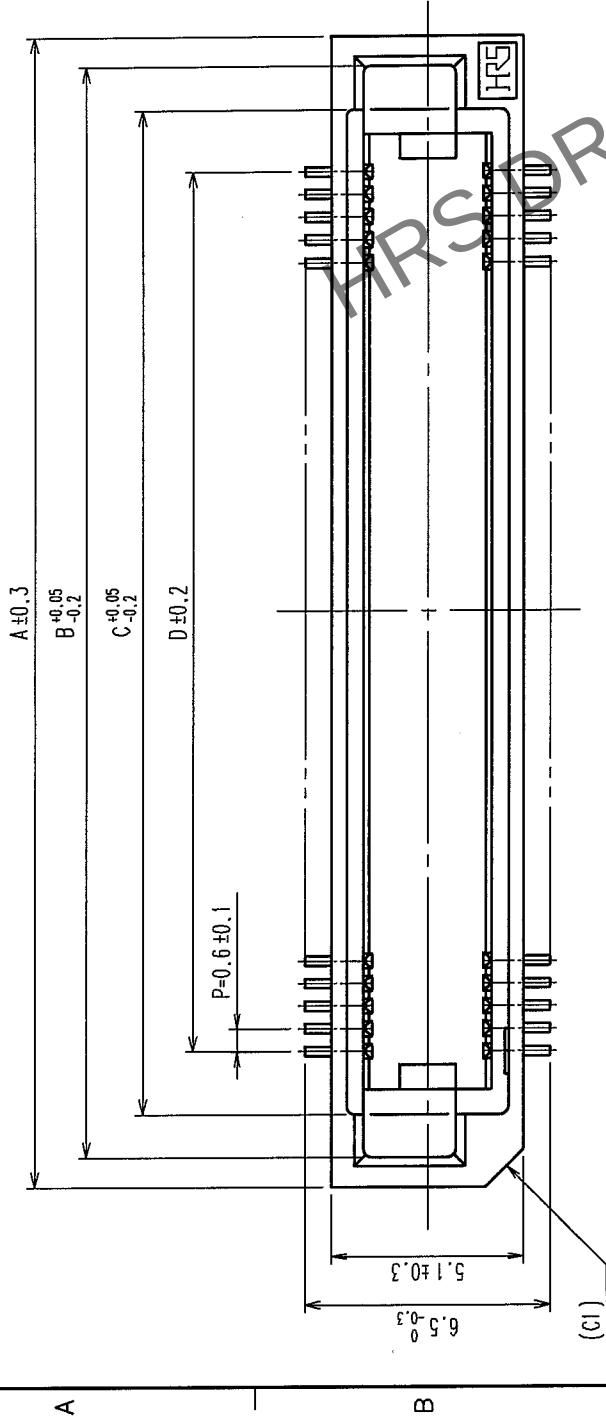


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△	3	RE-F-09671	K.N	H.Y	09.09.08	△				.	.
△					.	△				.	.
△					.	△				.	.

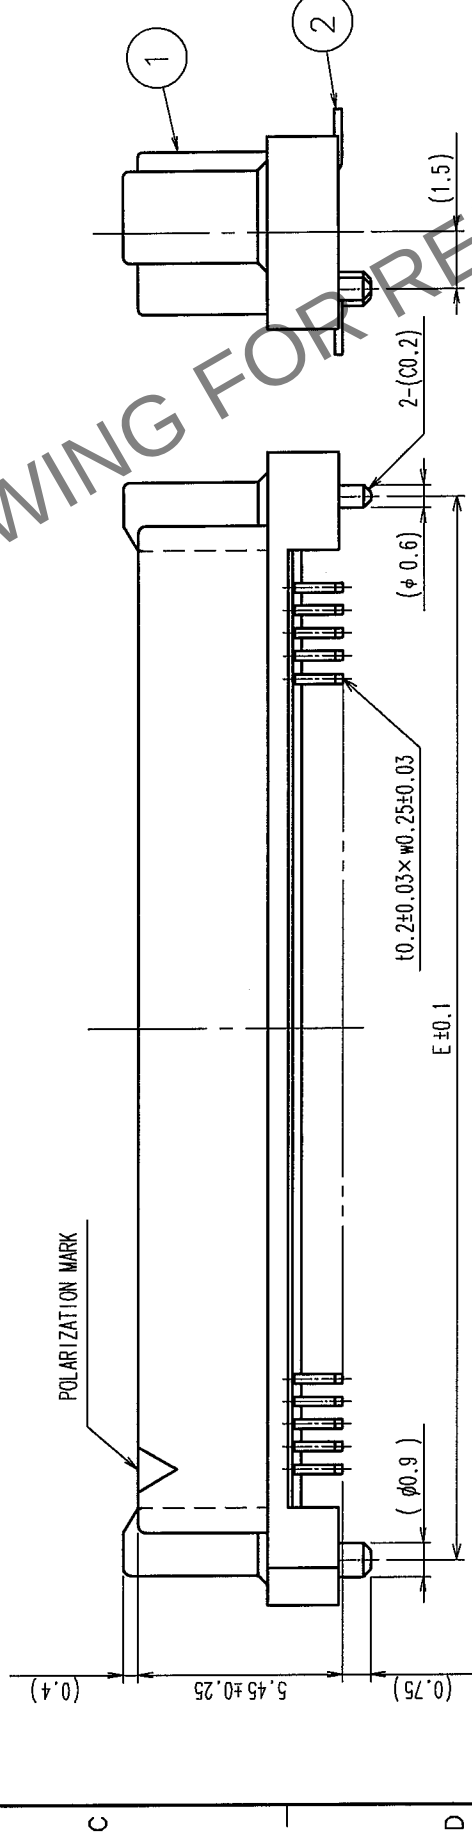

RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

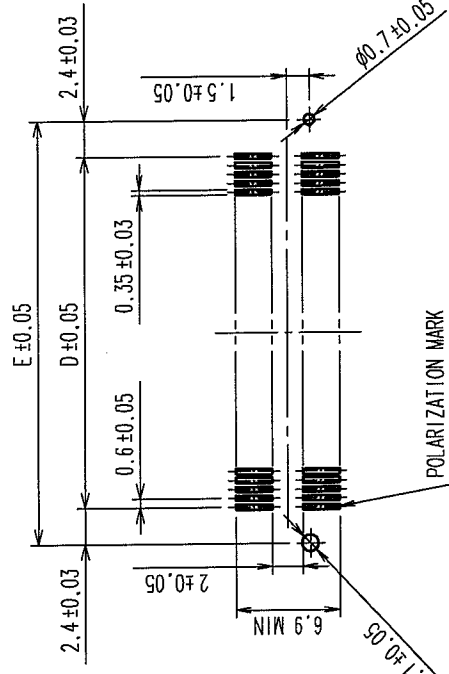

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.		A	B	C	D	E
FX8C- 60P-SV1 (93)	CL578-0521-6-93		24.60	23.00	20.70	17.40	22.20
FX8C- 80P-SV1 (93)	CL578-0523-1-93		30.60	29.00	26.70	23.40	28.20
FX8C-100P-SV1 (93)	CL578-0525-7-93		36.60	35.00	32.70	29.40	34.20
FX8C-120P-SV1 (93)	CL578-0526-0-93		42.60	41.00	38.70	35.40	40.20
FX8C-140P-SV1 (93)	CL578-0527-2-93		48.60	47.00	44.70	41.40	46.20

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
3. THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
4. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
6. NUMBER OF CONTACTS.

NUMBER OF EXISTENCE	NUMBER OF EXISTENCE
6	7

X: PRODUCED, -: NO PRODUCED

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μ m min LEAD AREA:TIN-PLATING 1μ m min UNDER PLATING:NICKEL 1μ m min		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
CL							

	DRAWING NO.		PART NO.	FX8C-**-P-SV1(93)
	SCALE	EDC3-151087-23		
	HRS		CODE NO.	CL578
	HIROSE ELECTRIC CO., LTD		1/2	

TO	PCK			
----	-----	--	--	--

