

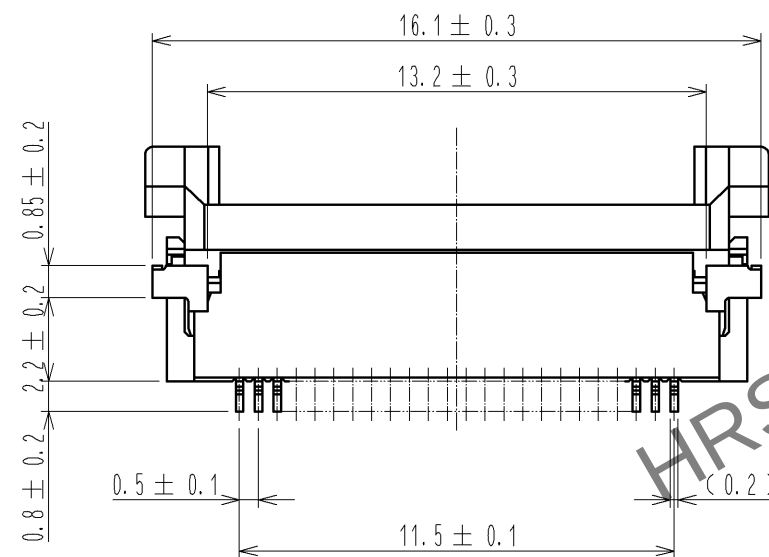





May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

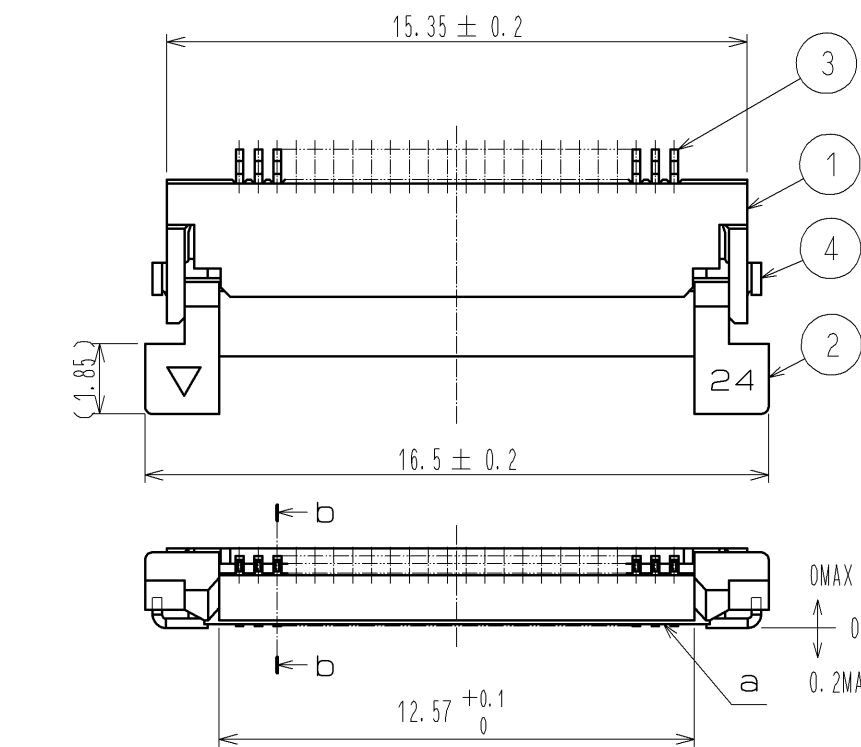

b-b (10:1)

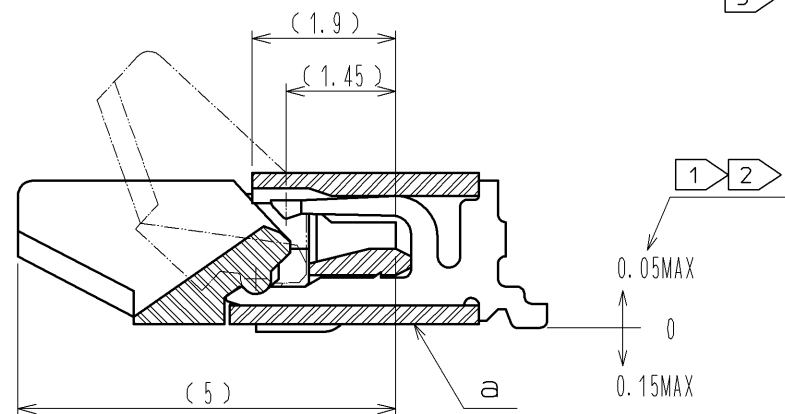


- NOTE 1 REFERENCE IS a.
2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

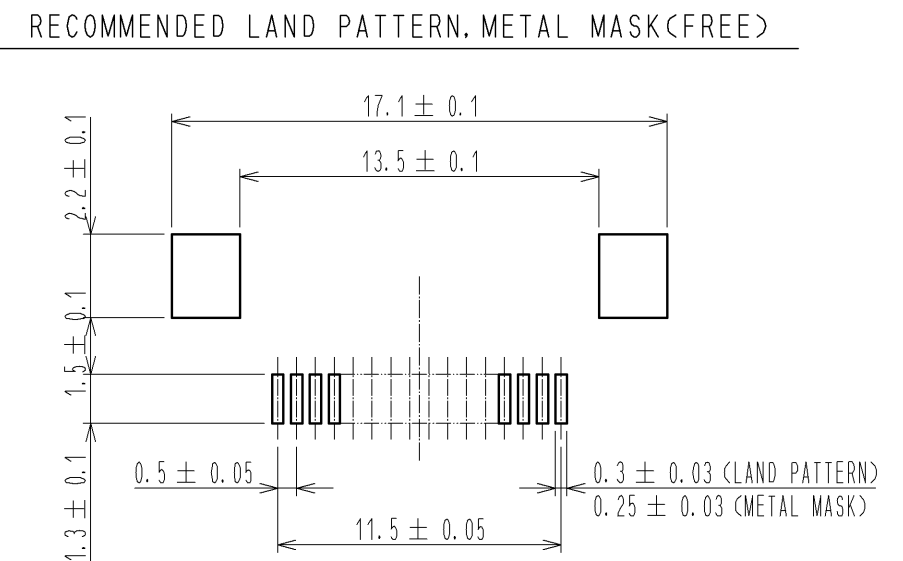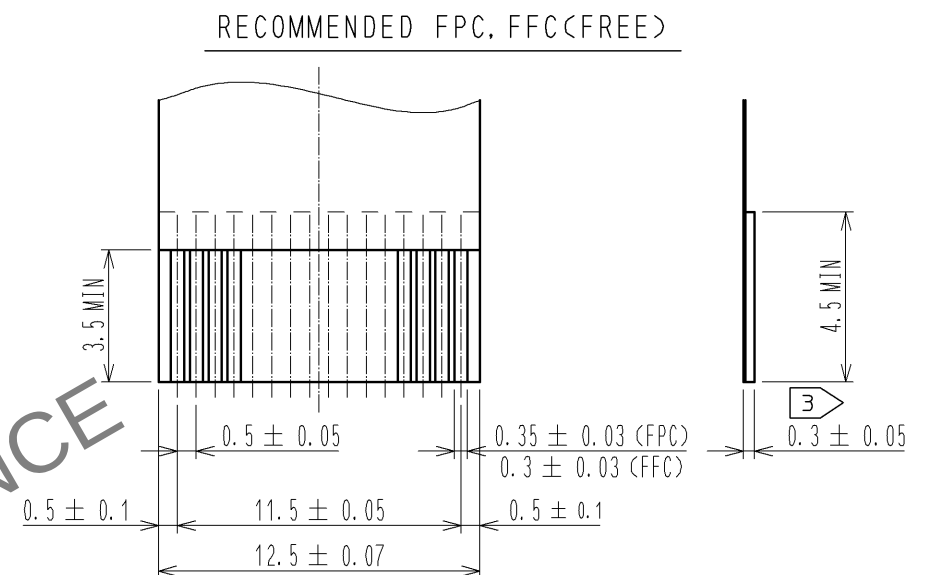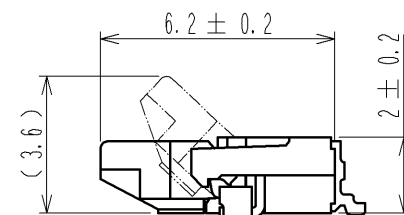


RECOMMENDED METAL MASK THICKNESS $t=0.15$

4	BRASS	TIN PLATING 1μMIN OVER NICKEL 1μMIN.		8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μMIN OVER NICKEL 1μMIN.		7	POLYSTYRENE	
2	PPS	DEEP BROWN	UL94V-0	6	POLYESTER	
1	POLYAMIDE	BEIGE	UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		5 : 1	 1	DIS-F-003410	MK. YASUMI	FN. TAMURA	09. 12. 11

 HIROSE ELECTRIC CO., LTD.	APPROVED	:RI. TAKAYASU	08. 09. 02	DRAWING NO.	EDC3-150555-51	
	CHECED	:HS. SAKAMOTO	08. 09. 01	PART NO.	FH12A-24S-0. 5SH(55)	
	DESIGNED	:MK. YASUMI	08. 08. 26	CODE NO.	CL586-0555-2-55	 1/2
	DRAWN	:MK. YASUMI	08. 08. 26			

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

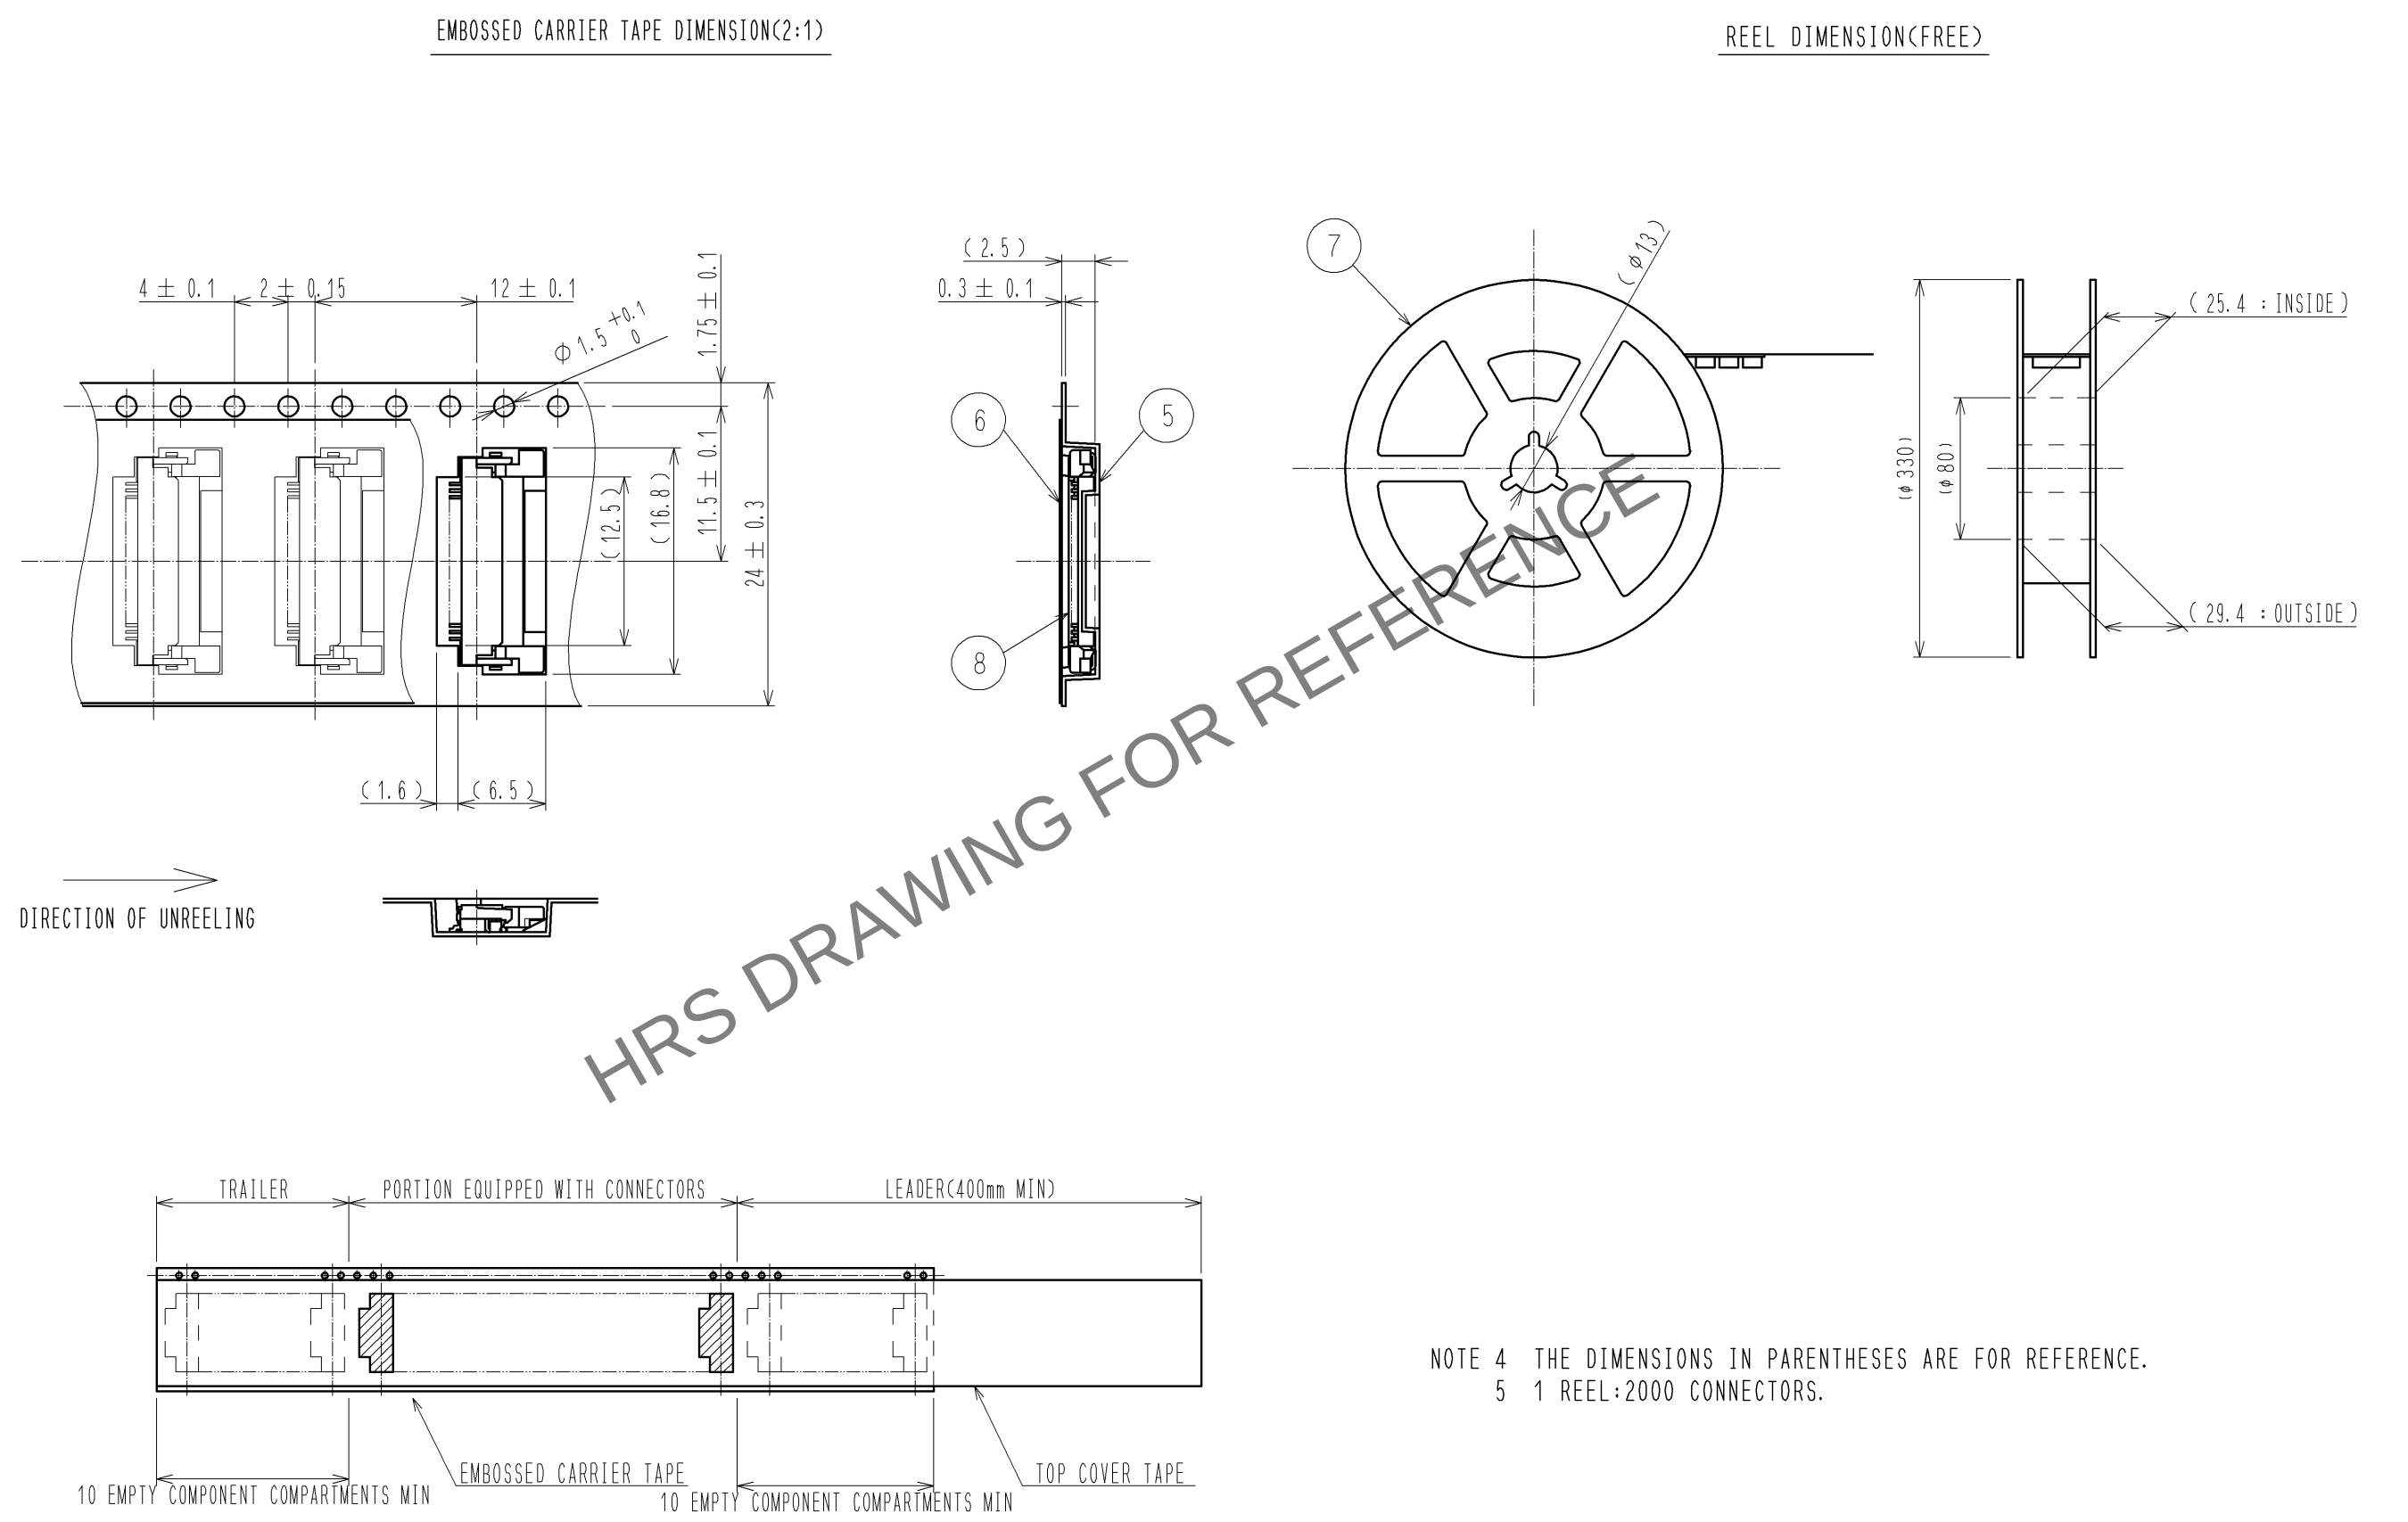

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-150555-51		
	PART NO.	FH12A-24S-0.5SH(55)		
	CODE NO.	CL586-0555-2-55		
			2	2