

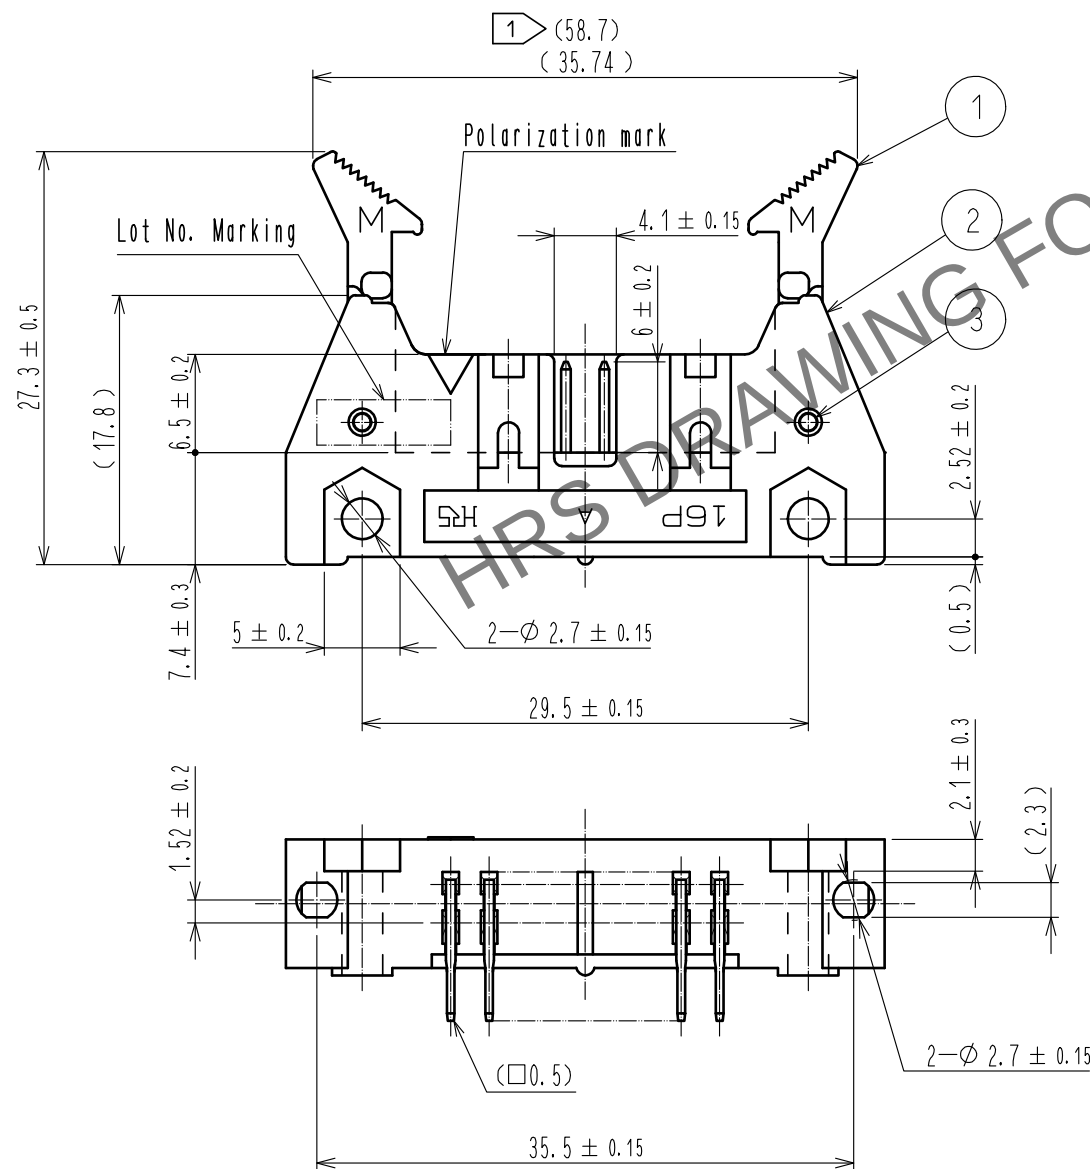
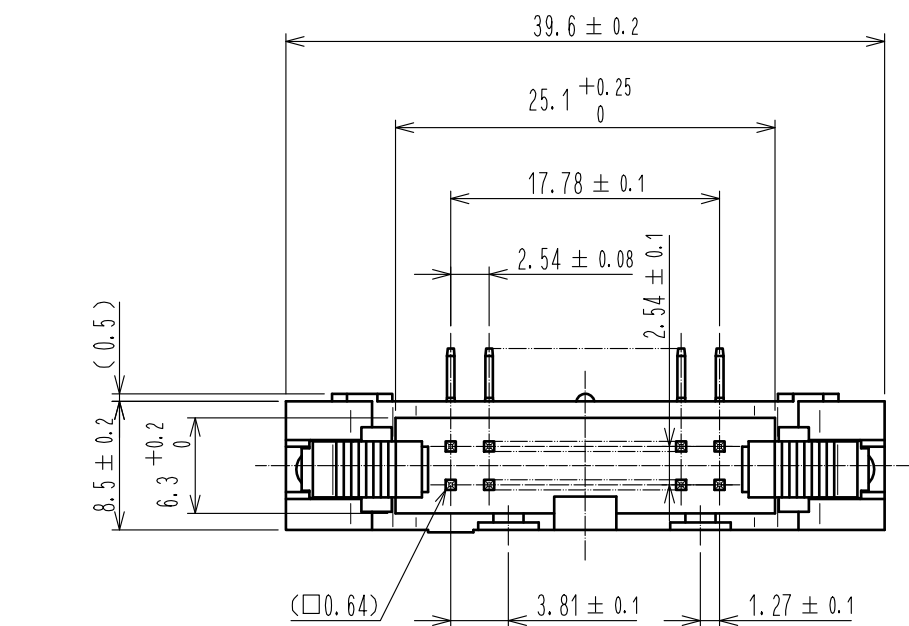


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

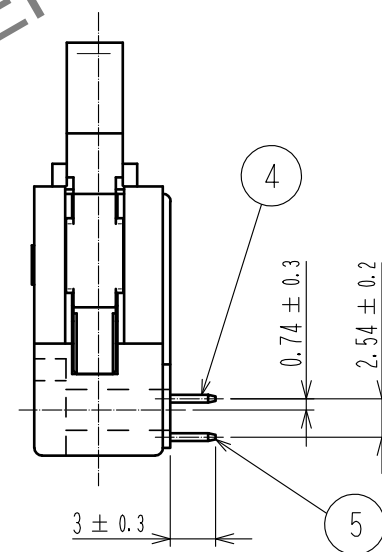

Recommended PC board hole pattern

Mating side

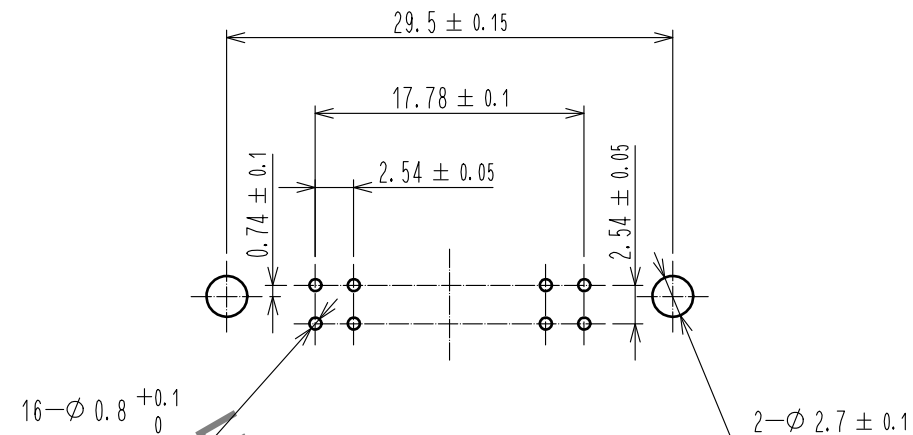

- Notes
- 1 The upper row dimension shows when the lock open out.
 - 2 The dimensions in parentheses are for reference.
 - 3 UL(File No. E52653)
C-UL(File No. E52653) authorization article.



					5	BRASS	Contact area : Gold 0.2μm min			
							Dip area : TIN-Plating 2μm min			
							Under plating : Nickel 2.5μm min			
3	STAINLESS				4	BRASS	Contact area : Gold 0.2μm min			
2	PBT	BLACK	UL94V-0				Dip area : TIN-Plating 2μm min			
1	PBT	BLACK	UL94V-0				Under plating : Nickel 2.5μm min			
NO.		MATERIAL		FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS	
UNITS mm				SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS DIS-F-00005906		DESIGNED AK. IWAHORI	CHECKED HT. YAMAGUCHI	DATE 20200302
 HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		20181210		DRAWING NO. EDC-017382-63-00				
		CHECKED : HT. YAMAGUCHI		20181210		PART NO. HIF3BA-16PA-2. 54DS(63)				
		DESIGNED : TS. OONO		20181207		CODE NO. CL610-0093-8-63				
		DRAWN : MK. OKI		20181207						