

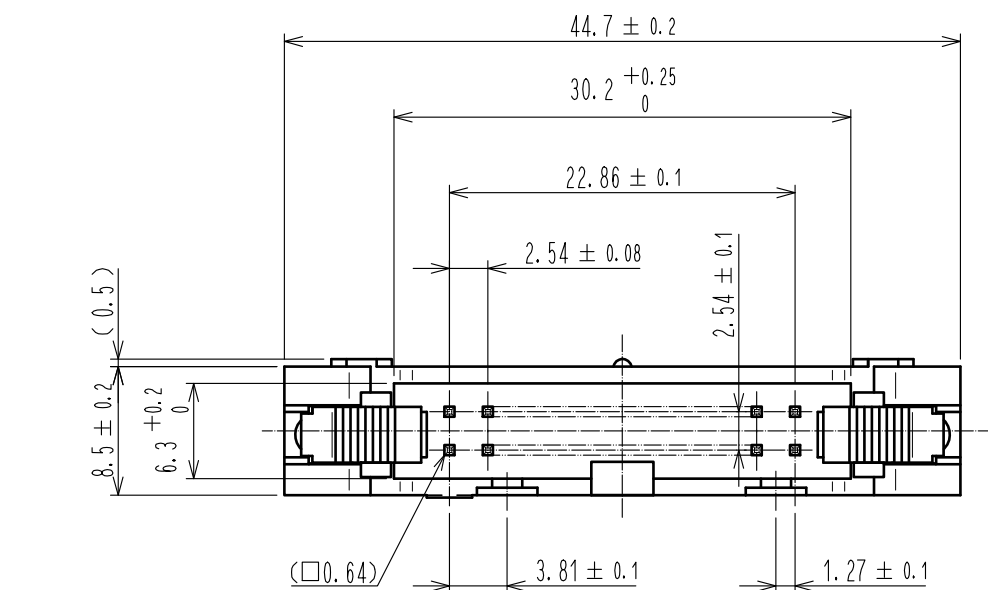
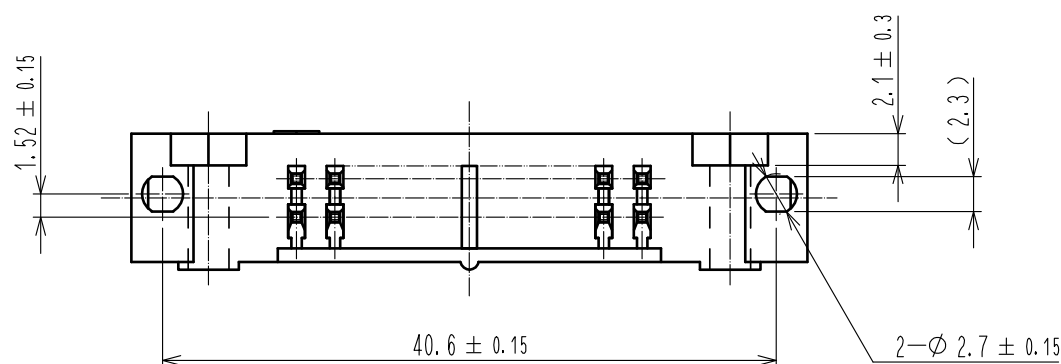
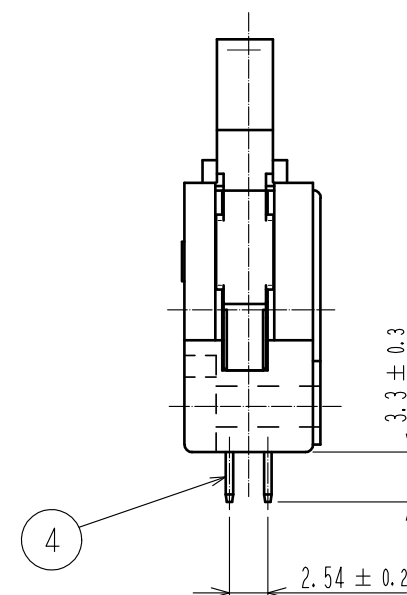


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

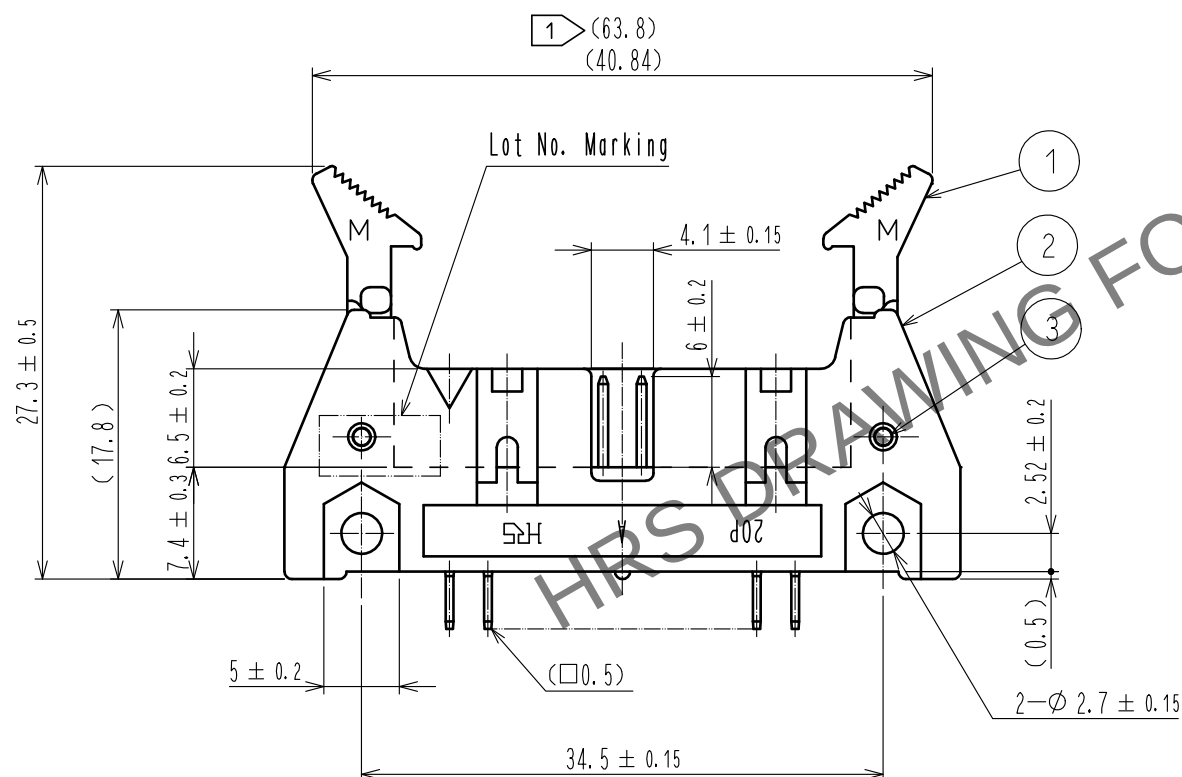

Recommended PC board hole pattern
t=1.6

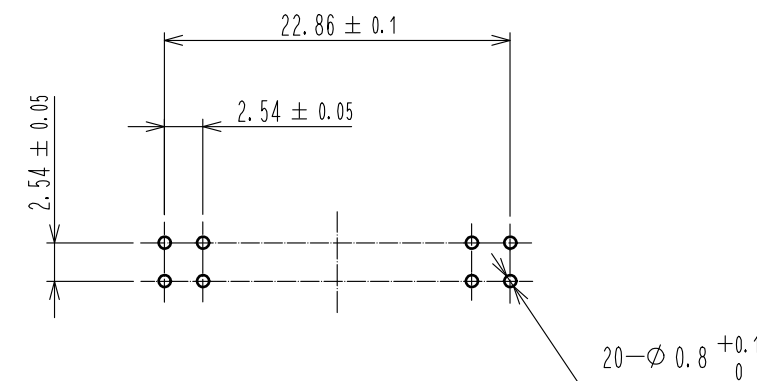

Notes 1 The upper dimension shows when the lock open out.
2 The dimensions in parentheses are for reference.

3	STAINLESS			4	BRASS	Contact area : Gold 0.03μm min			
2	PBT	BLACK	UL94V-0			Dip area : TIN-Plating 2μm min			
1	PBT	BLACK	UL94V-0			Under plating : Nickel 2.5μm min			
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	: NH. NAKATA		18.03.05	DRAWING NO.	EDC-017372-72-27		
		CHECKED	: MT. ITANO		18.03.02	PART NO.	HIF3BA-20PA-2.54DSA(72)		
		DESIGNED	: HR. NAGAYASU		18.03.02	CODE NO.	CL610-0114-6-72		
		DRAWN	: BOBAE KIM		18.03.02				