

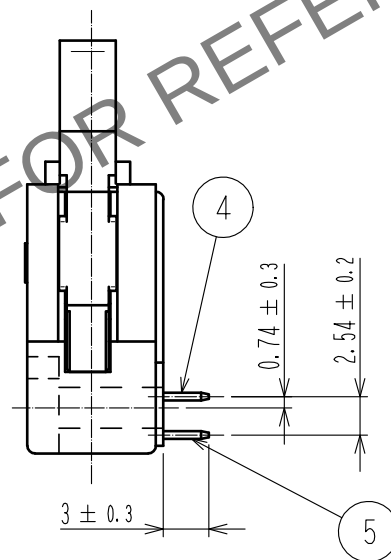
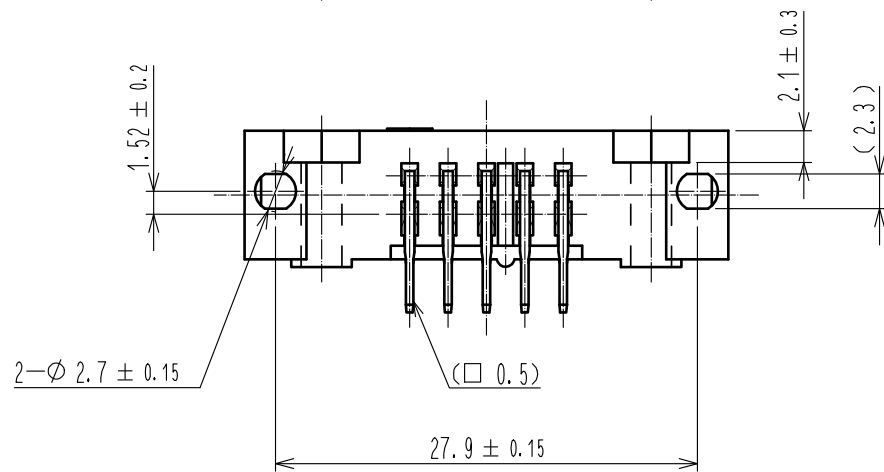
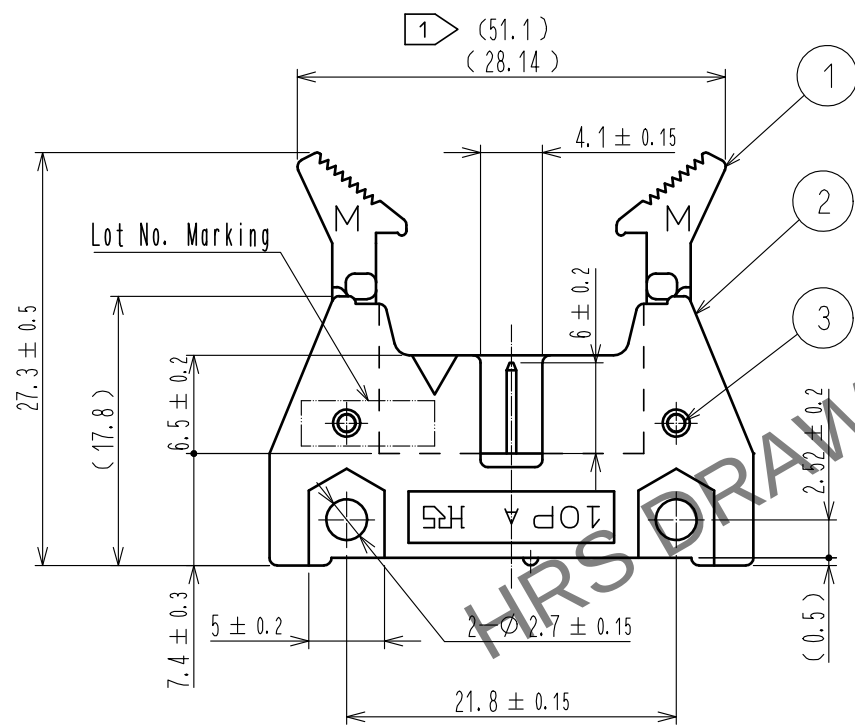


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

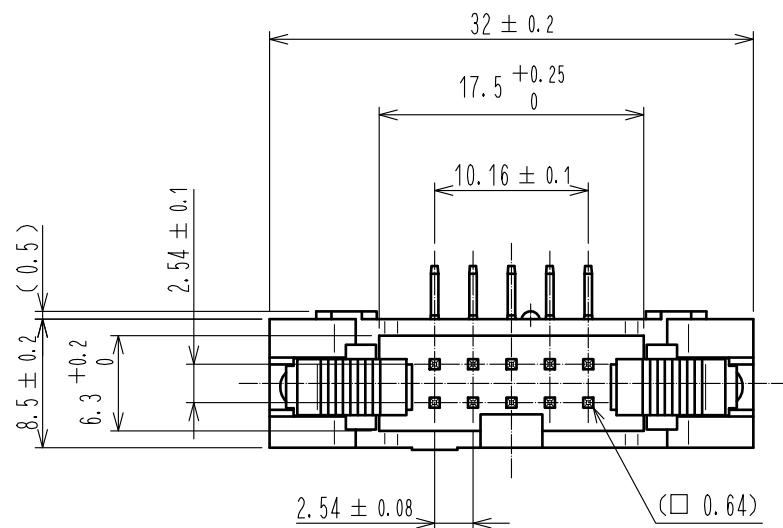

Recommended PC board hole pattern

Mating side

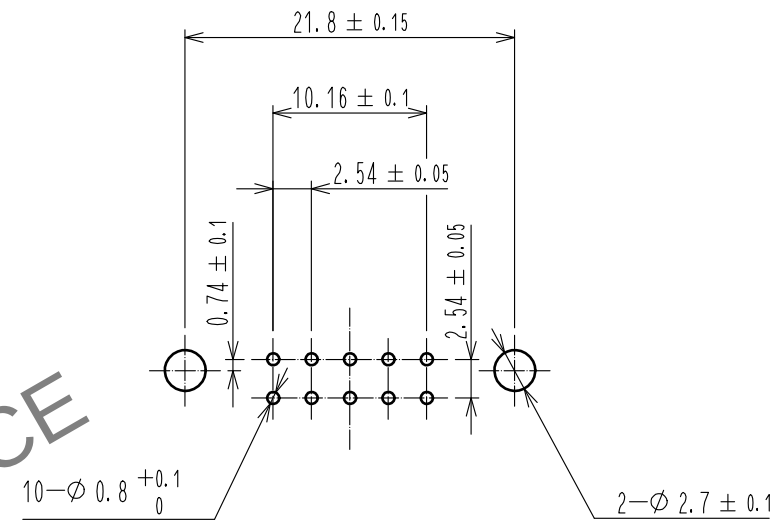

- Notes 1 The upper dimension shows when the lock open out.
2 The dimensions in parentheses are for reference.
3 UL(File No.E52653)
C-UL(File No.E52653) authorization article.



3		STAINLESS			5	BRASS	Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
2		PBT	BLACK	UL94V-0	4	BRASS	Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
1		PBT	BLACK	UL94V-0			Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
NO.	MATERIAL		FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00005906		DESIGNED AK. IWAHORI
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		20181210	DRAWING NO. EDC-017564-63-00		
		CHECKED : HT. YAMAGUCHI		20181210	PART NO. HIF3BD-10PA-2. 54DS(63)		
		DESIGNED : TS. OONO		20181207	CODE NO. CL610-0171-0-63		
		DRAWN : MK. OKI		20181207			
							DATE 20200302