

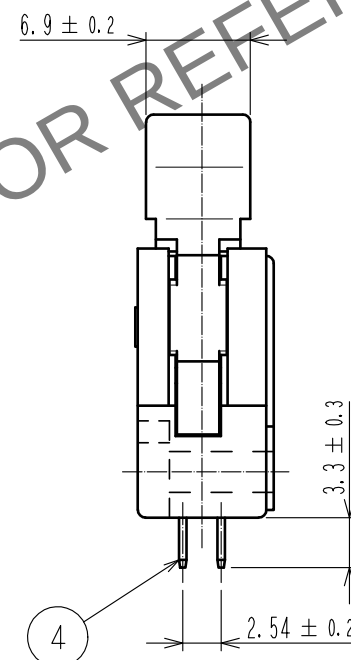
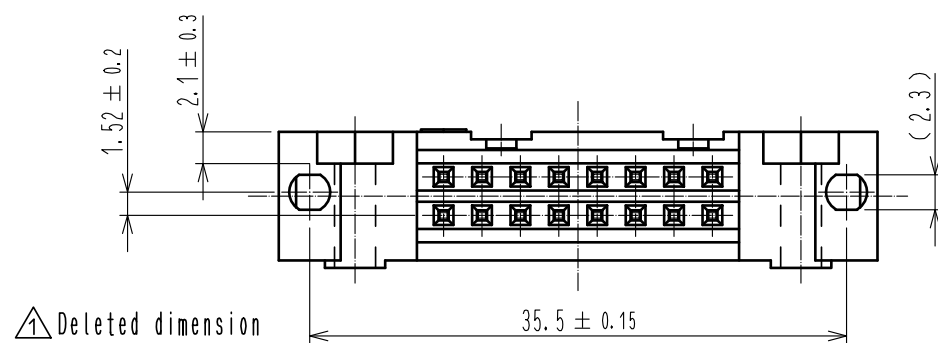
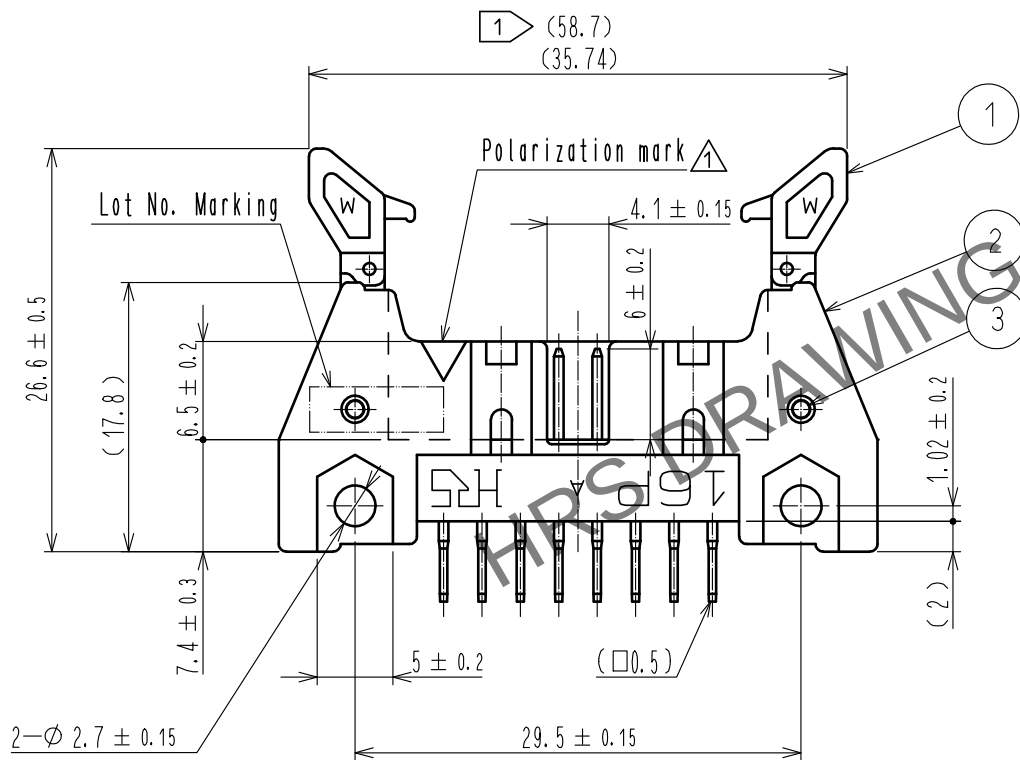



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

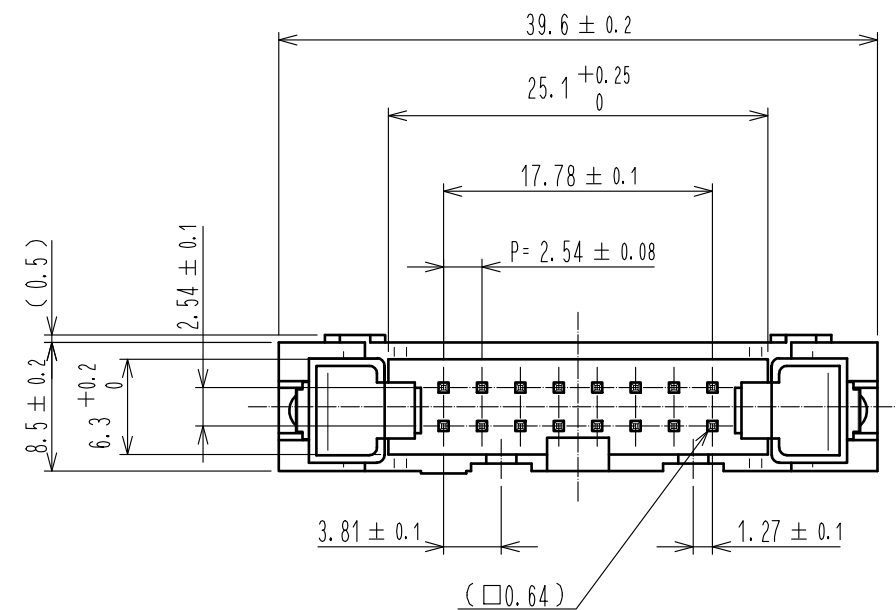

Recommended PC board hole pattern

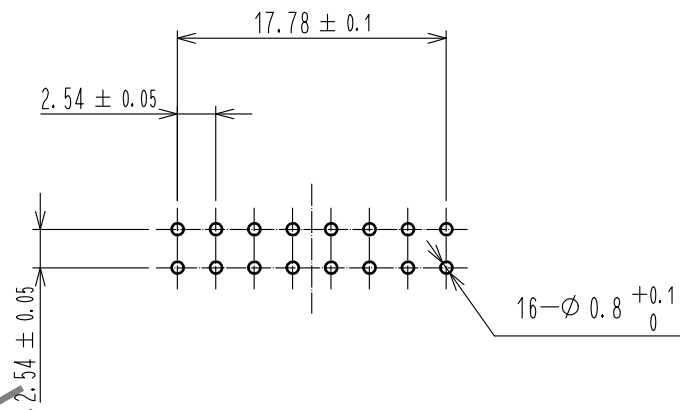

- Notes 1 The upper row dimension shows when the lock open.
2 The dimensions in parentheses are for reference.

3		STAINLESS		4		BRASS		Contact area : Gold 0.2μm min.					
1, 2		PBT						Dip area : TIN-Plating 2μm min.					
		BLACK						UL94V-0			Under plating : Nickel 2.5μm min.		
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS			
UNITS mm				SCALE 2 : 1				COUNT 3	DESCRIPTION OF REVISIONS DIS-F-00004483		DESIGNED TS.00NO	CHECKED HT. YAMAGUCHI	DATE 20190604
 HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA		20161115		DRAWING NO.		EDC-153378-71-00					
		CHECKED : HT. YAMAGUCHI		20161115		PART NO.		HIF3CAW-16PA-2. 54DSA(71)					
		DESIGNED : HR. NAGAYASU		20161114		CODE NO.		CL610-2116-2-71					
		DRAWN : HR. NAGAYASU		20161114				 					

HRS HIROSE ELECTRIC CO., LTD.