


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

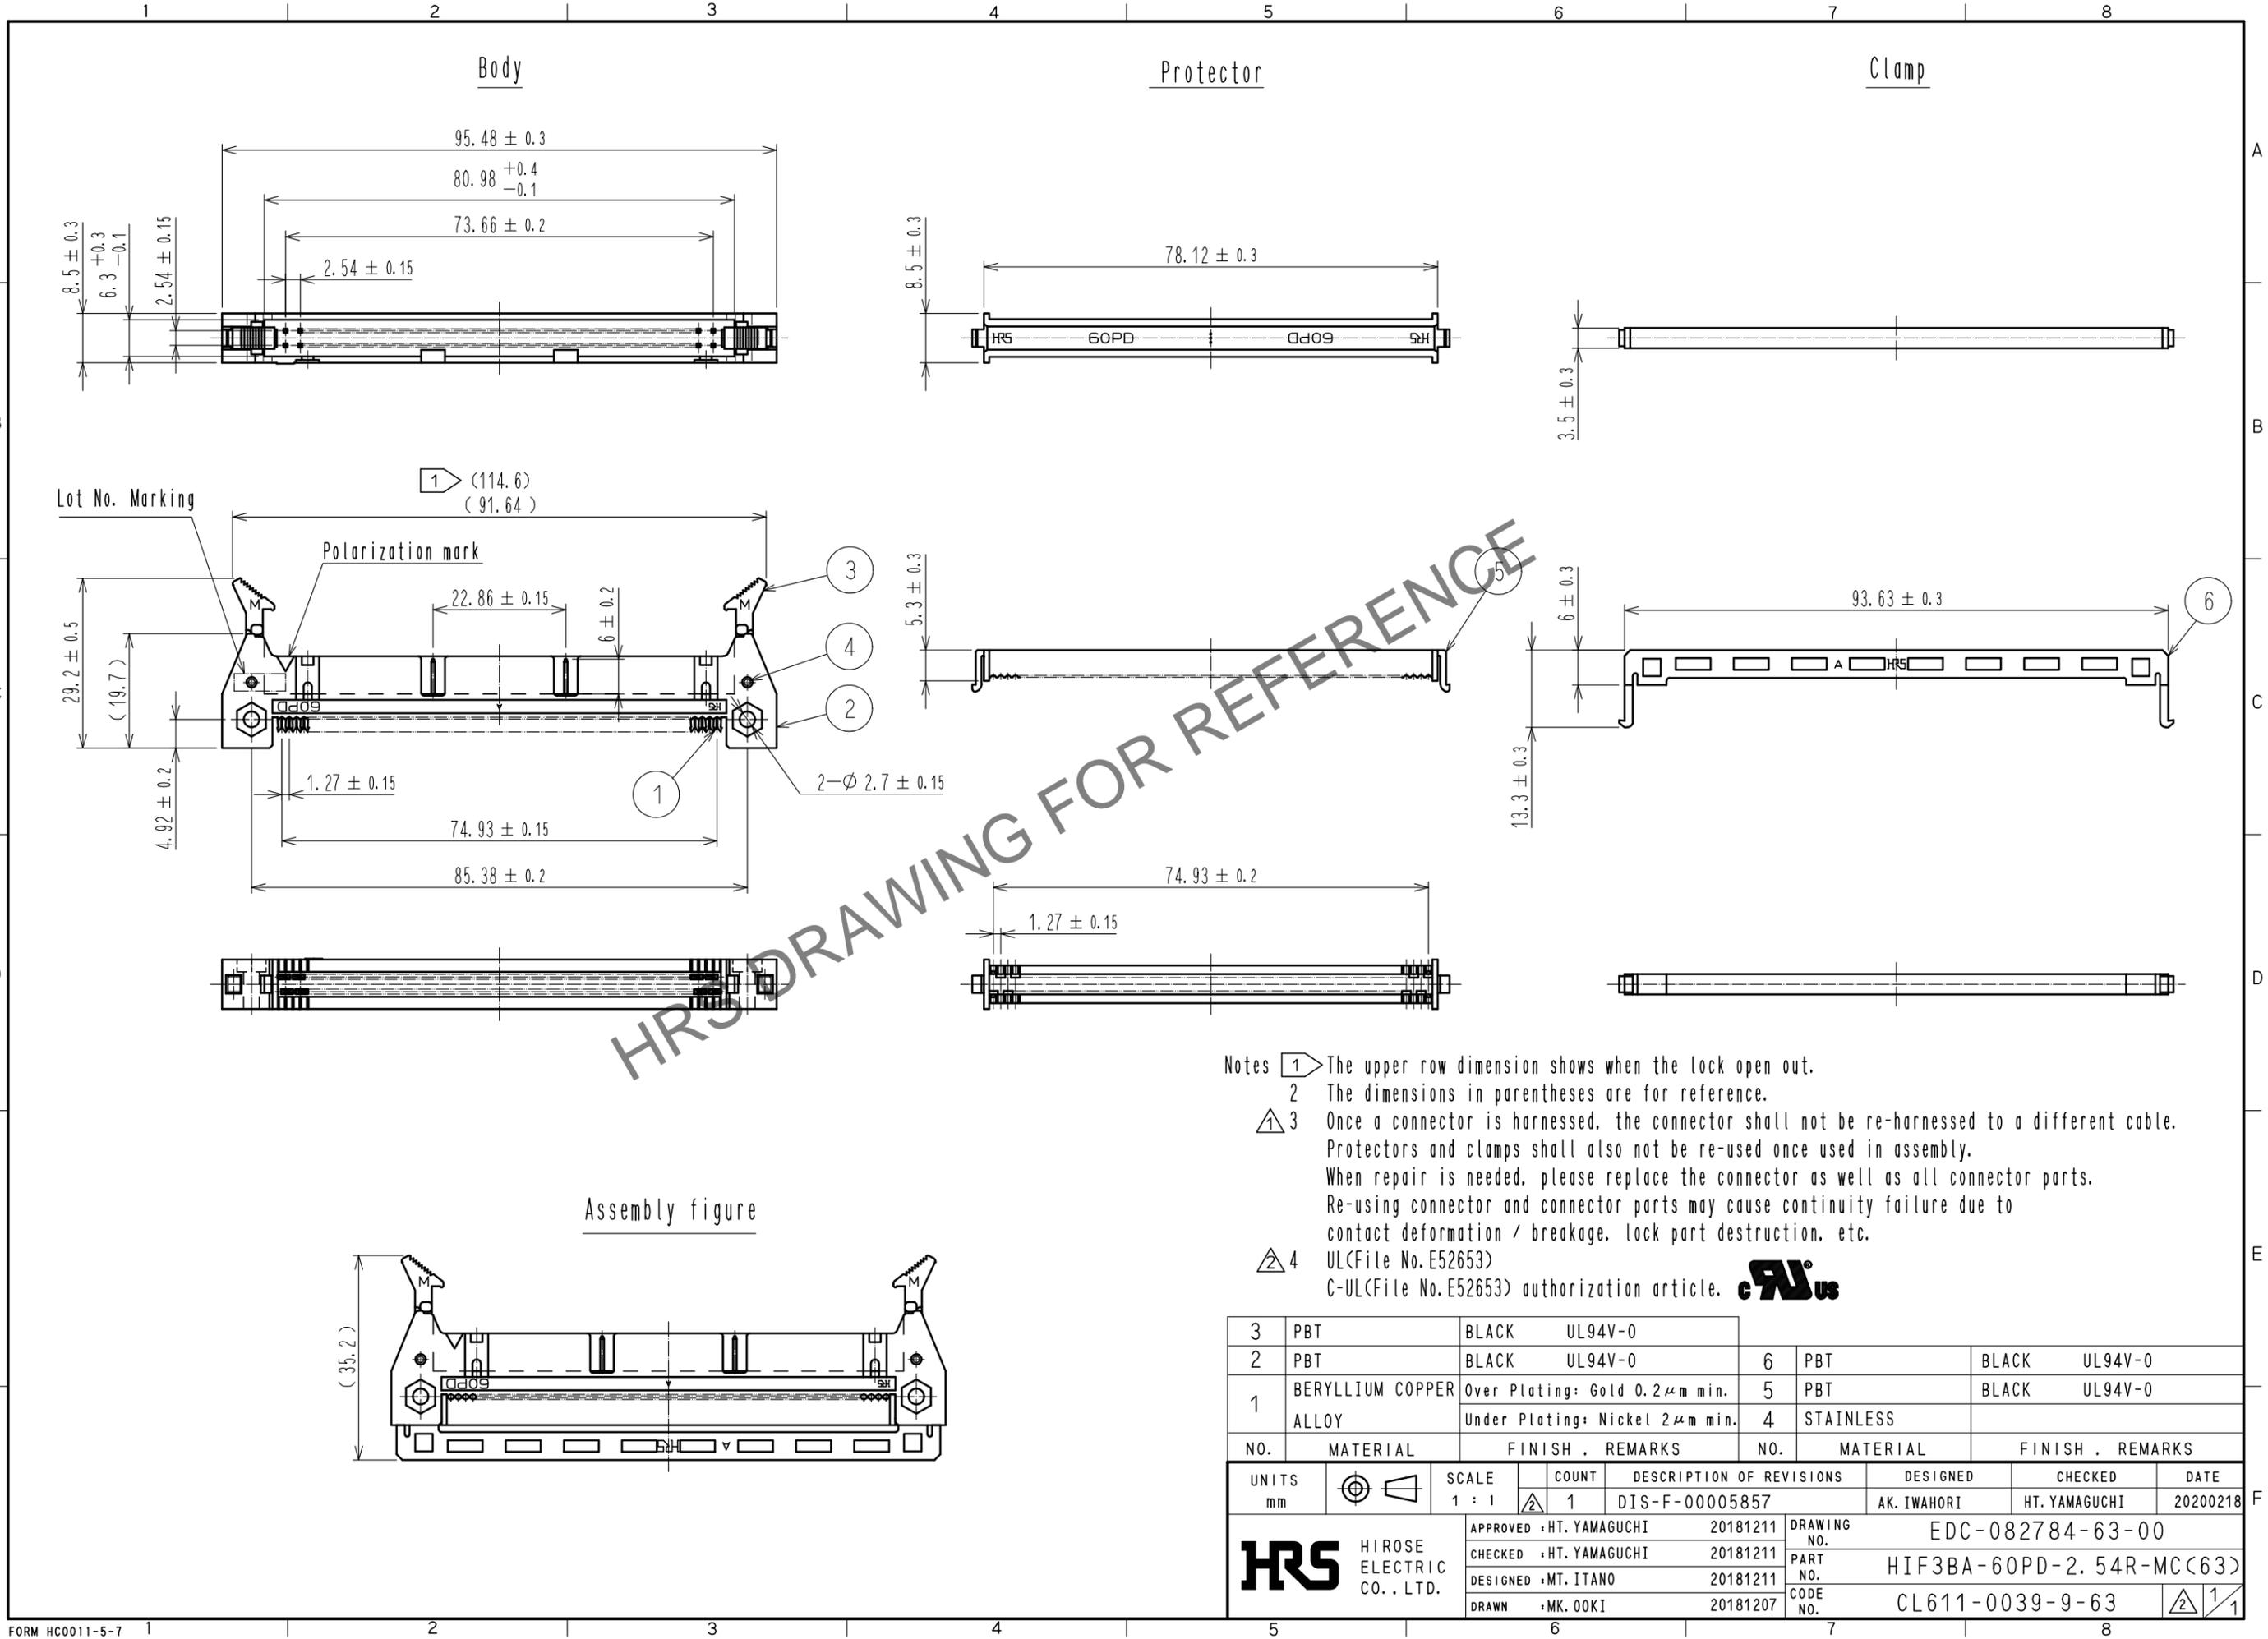

Notes

- 1 The upper row dimension shows when the lock open out.
- 2 The dimensions in parentheses are for reference.
- 3 Once a connector is harnessed, the connector shall not be re-harnessed to a different cable. Protectors and clamps shall also not be re-used once used in assembly. When repair is needed, please replace the connector as well as all connector parts. Re-using connector and connector parts may cause continuity failure due to contact deformation / breakage, lock part destruction, etc.
- 4 UL(File No. E52653)  
C-UL(File No. E52653) authorization article.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	PBT	BLACK	UL94V-0	6	PBT	BLACK	UL94V-0
2	PBT	BLACK	UL94V-0	5	PBT	BLACK	UL94V-0
1	BERYLLIUM COPPER ALLOY	Over Plating: Gold 0.2µm min. Under Plating: Nickel 2µm min.		4	STAINLESS		

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	1 : 1	1	DIS-F-00005857	AK. IWAHORI	HT. YAMAGUCHI	20200218

APPROVED	CHECKED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
HT. YAMAGUCHI 20181211	HT. YAMAGUCHI 20181211	MT. ITANO 20181211	MK. OKI 20181207	EDC-082784-63-00	HIF3BA-60PD-2.54R-MC(63)	CL611-0039-9-63