



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

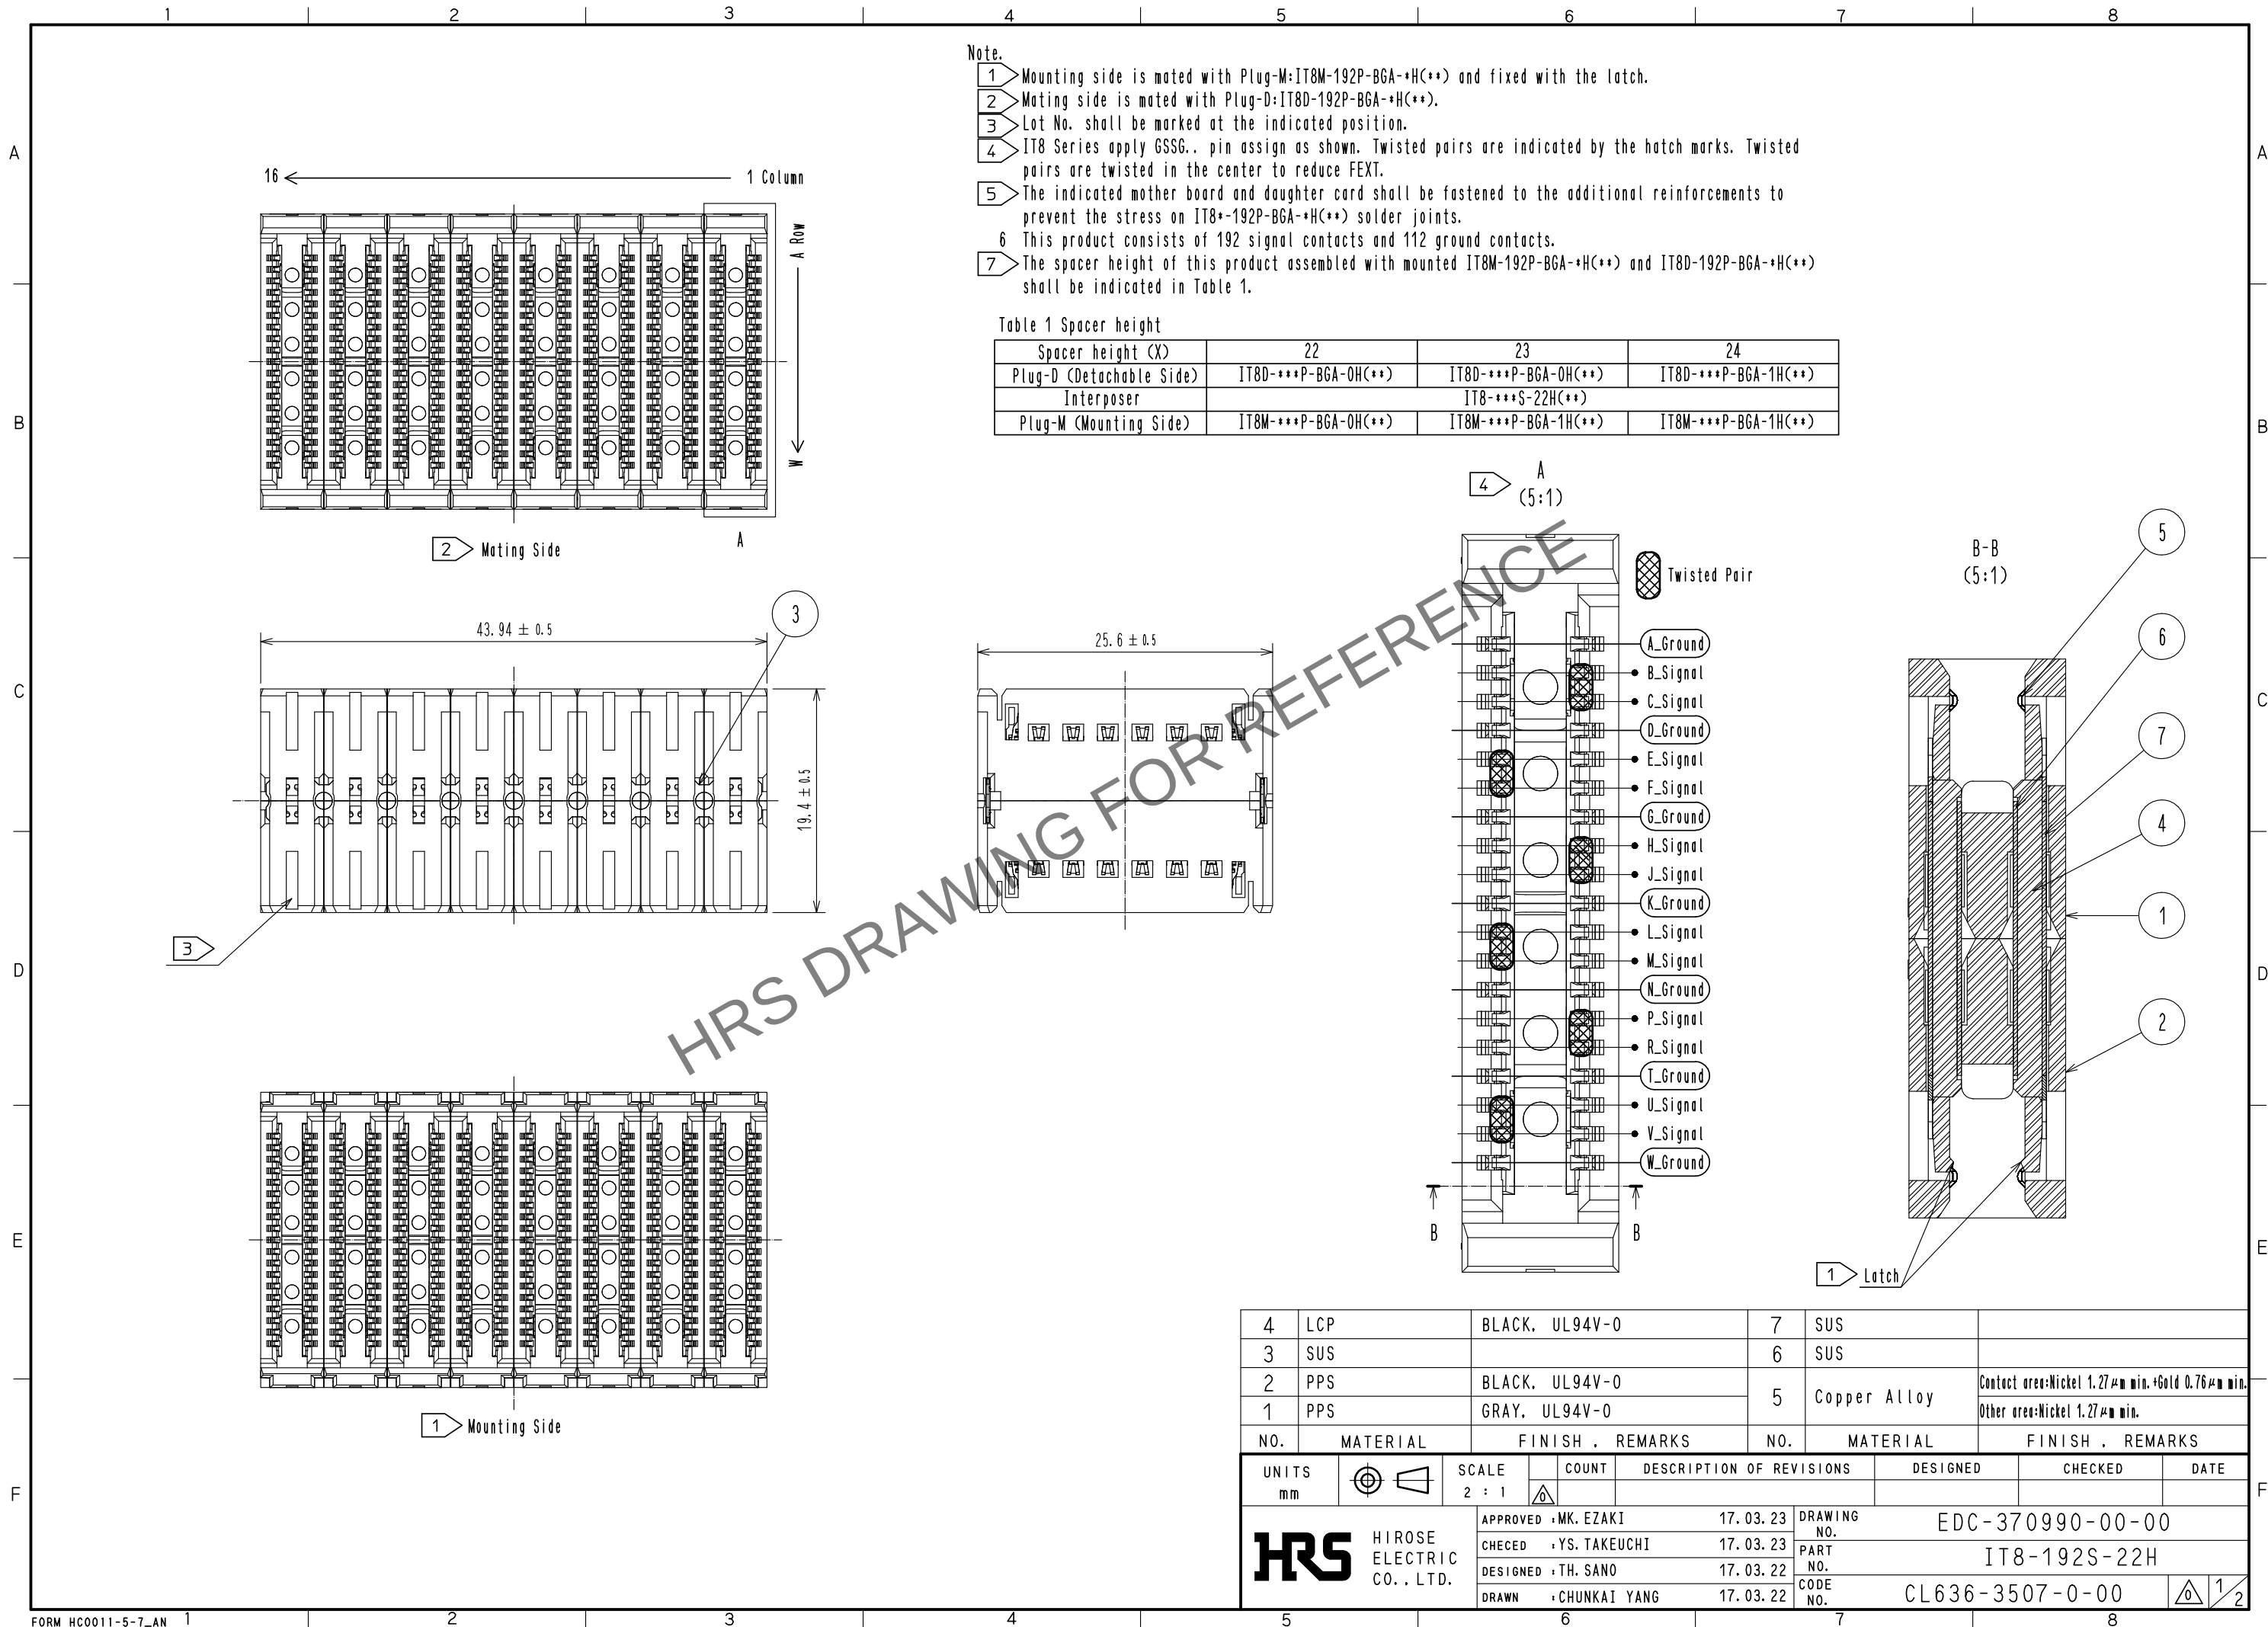

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

## IT8 Assembly Process

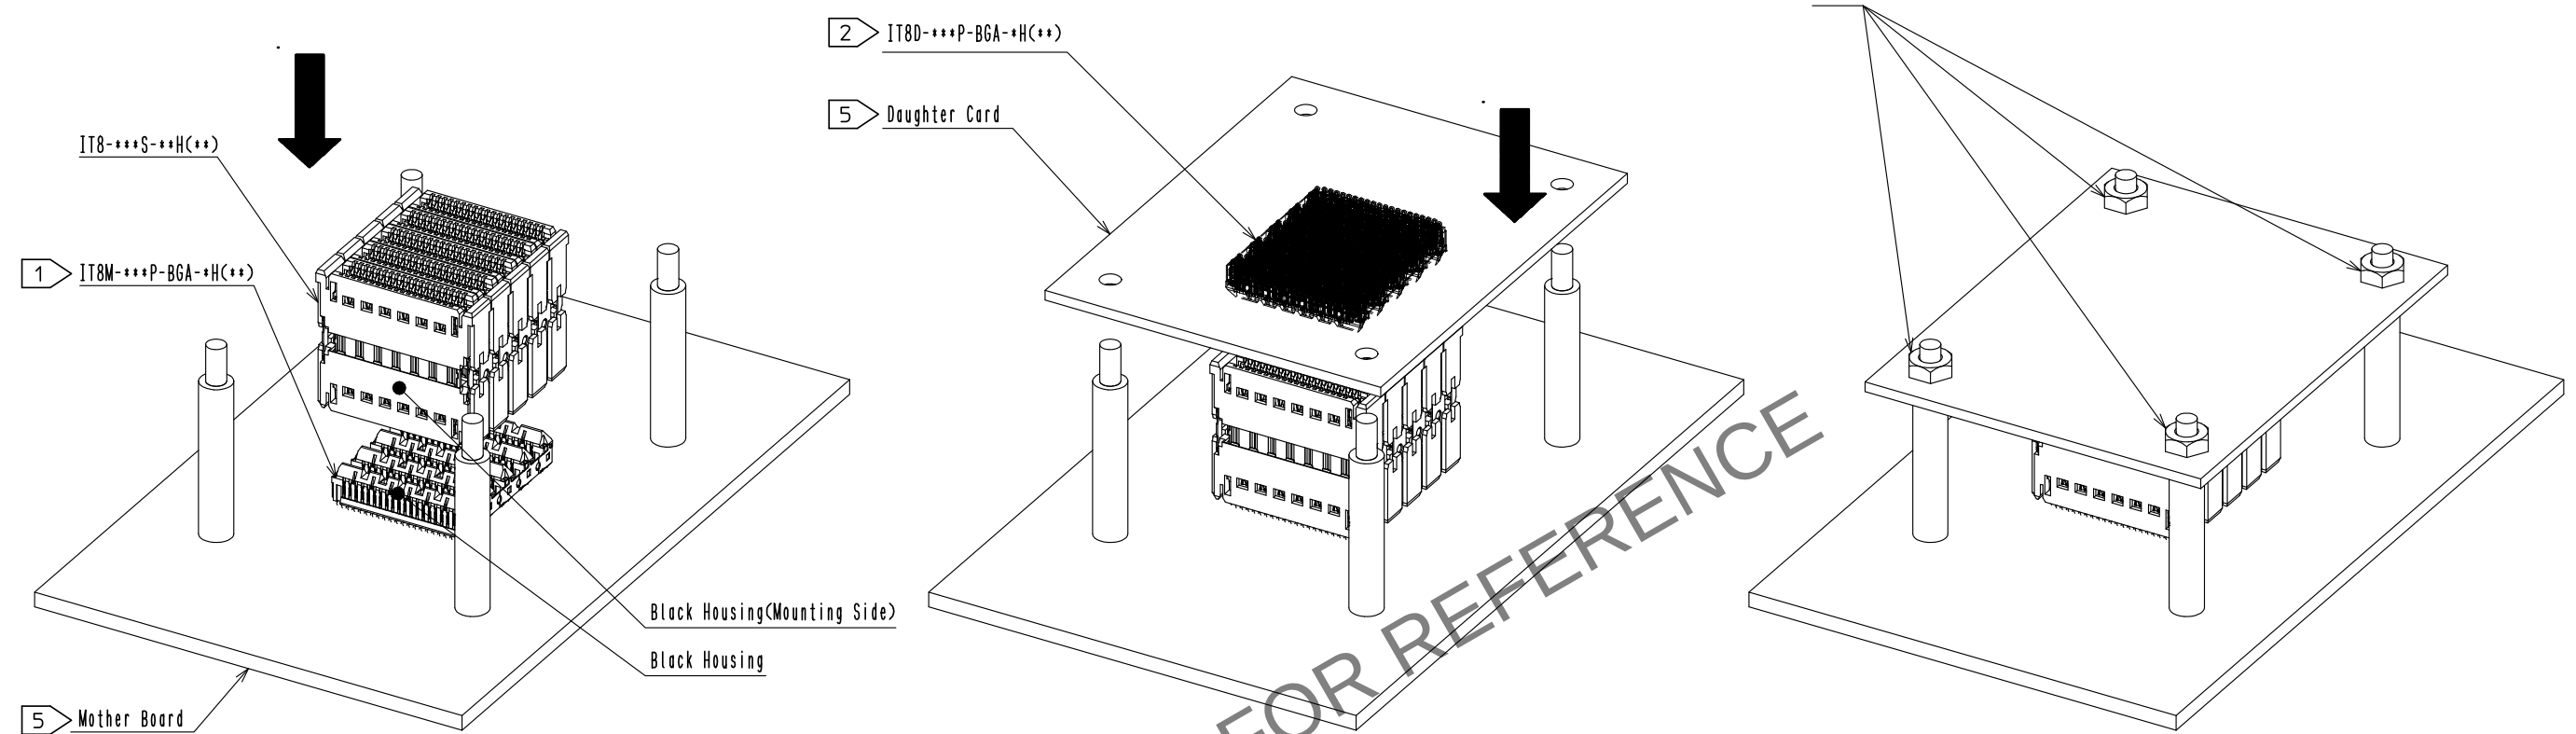


1) Insert mounting side of Interposer(IT8-\*\*\*S-\*\*\*H(\*\*)) by pressing on top of Interposer into reflowed Mounting Plug(IT8M-\*\*\*P-BGA-\*\*\*H(\*\*)) having black housings.

2) Insert Detachable Plug(IT8D-\*\*\*P-BGA-\*\*\*H(\*\*)) having gray housings into mating side of Interposer(IT8-\*\*\*S-\*\*\*H(\*\*)).

3) Install and tighten nuts to fix mated Detachable Plug after completion of mating.

## IT8 Mated Condition

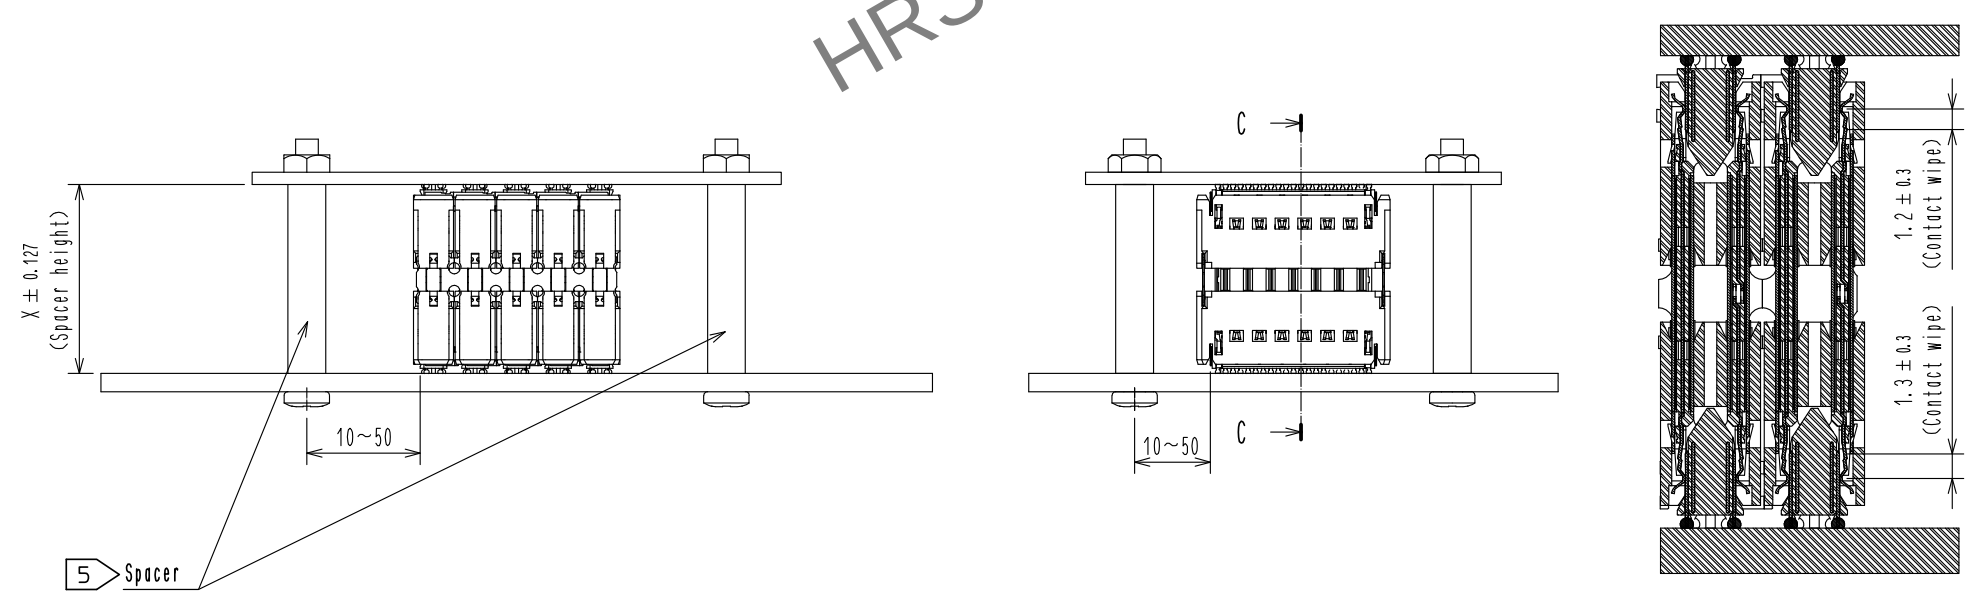

|            |                                                |                  |
|------------|------------------------------------------------|------------------|
| <b>HRS</b> | DRAWING NO.                                    | EDC-370990-00-00 |
|            | PART NO.                                       | IT8-192S-22H     |
|            | CODE NO.                                       | CL636-3507-0-00  |
|            | <div><div></div><div>2</div><div>2</div></div> |                  |