
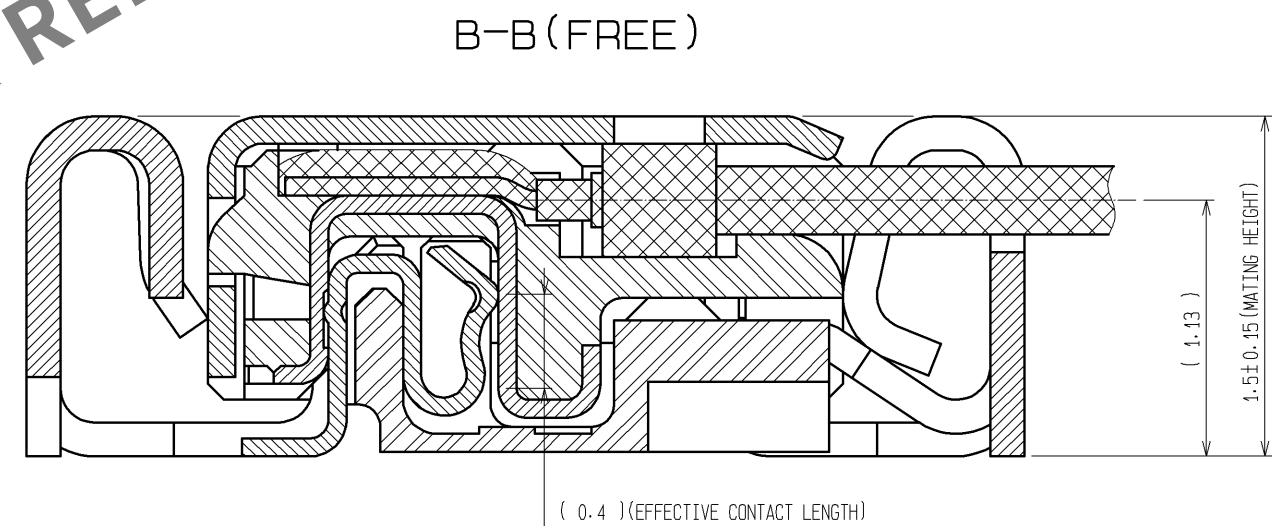
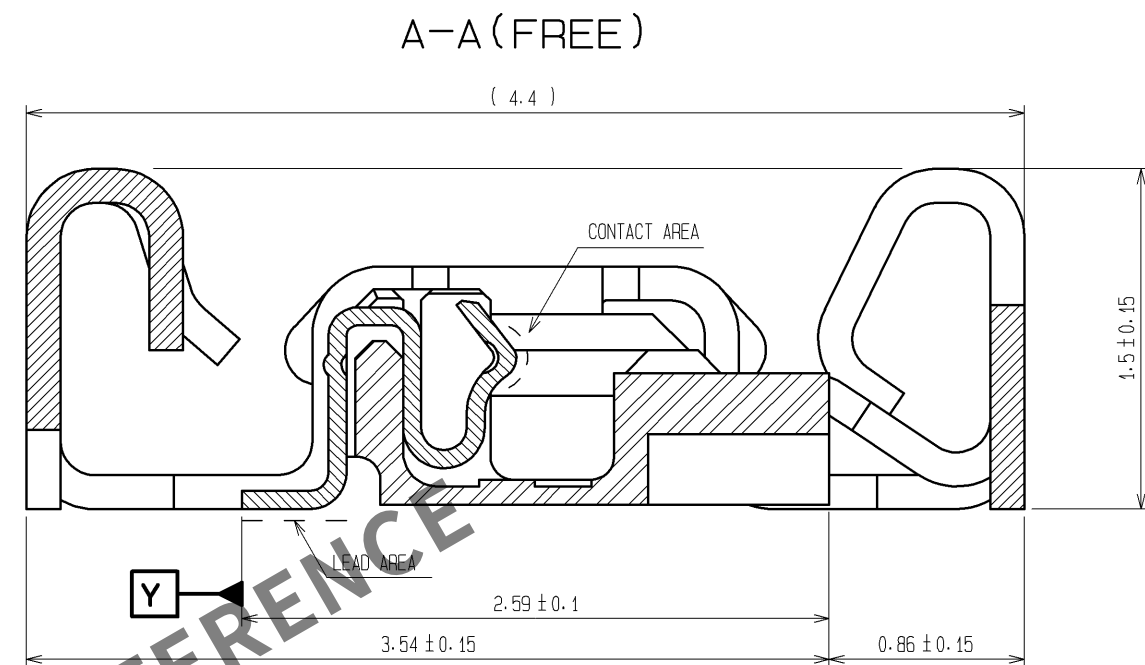
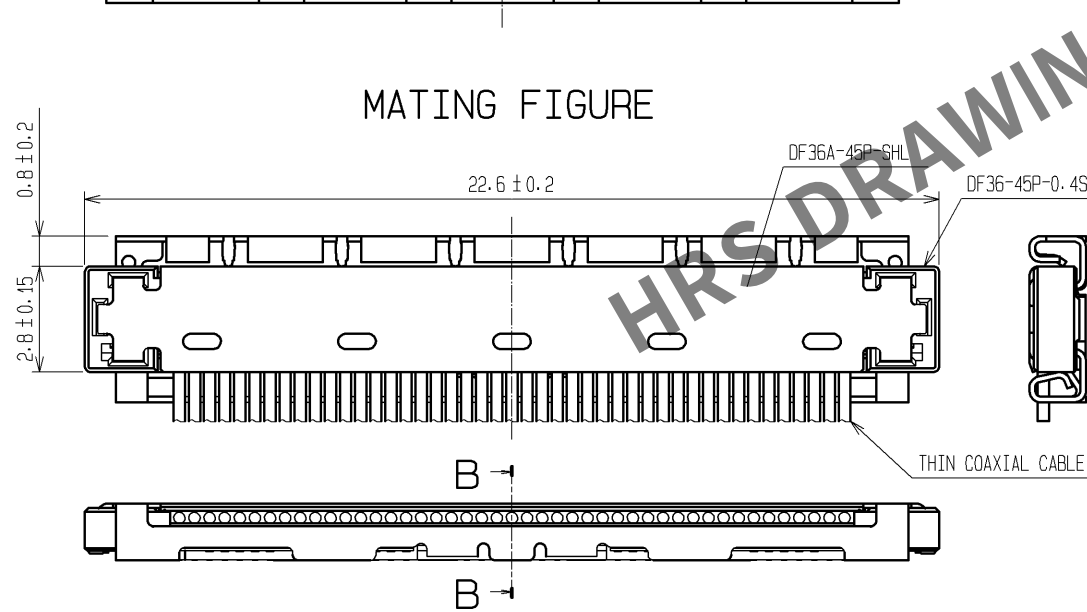
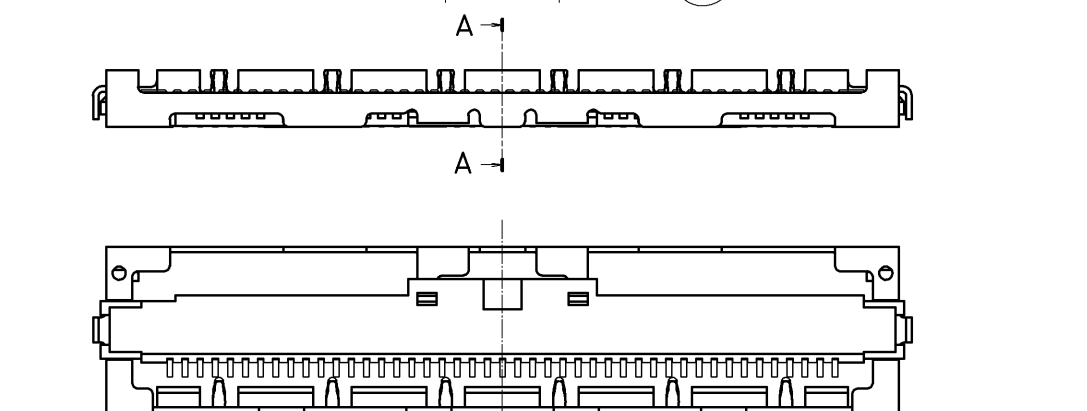


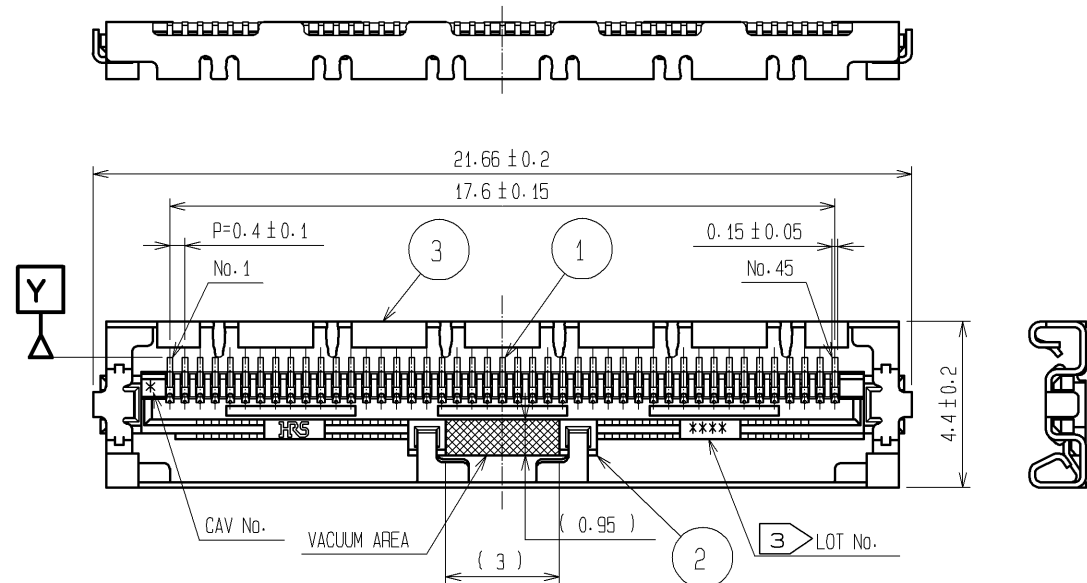


NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: BGFD
→YEAR:2008 MONTH:July DAY:15 LINE No.:4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
5. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.

YEAR		MONTH		DAY						LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE	LINE No.	CODE
10	0	Jan	A	1	1	11	B	21	M	1	A
11	1	Feb	B	2	2	12	C	22	N	2	B
12	2	Mar	C	3	3	13	D	23	P	3	C
13	3	Apr	D	4	4	14	E	24	Q	4	D
14	4	May	E	5	5	15	F	25	R	5	E
15	5	Jun	F	6	6	16	G	26	S	6	F
16	6	Jul	G	7	7	17	H	27	T	7	G
17	7	Aug	H	8	8	18	J	28	U	8	H
08	8	Sep	I	9	9	19	K	29	V	9	I
09	9	Oct	J	10	A	20	L	30	W	10	J
		Nov	K					31	X		
		Dec	L								

			6		PS	BLACK							
			5		POLYESTER	CLEAR							
2	LCP	UL94V-0 . BLACK		4	PS	CLEAR							
1	PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3µm min LEAD AREA : Gold PLATING 0.1µm min UNDER PLATING : Nickel PLATING 2µm min		3	PHOSPHOR BRONZE	WHOLE AREA : Tin PLATING 1µm min UNDER PLATING : Copper PLATING 0.2µm min							
NO.		MATERIAL		FINISH . REMARKS		NO.	MATERIAL		FINISH . REMARKS				
UNITS mm				SCALE 5 : 1				COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA		14.11.06		DRAWING NO.		EDC3-313245-04					
		CHECKED : MH. TSUCHIDA		14.11.06		PART NO.		DF36A-45S-0.4V(55)					
		DESIGNED : IO. DENPOUYA		14.11.06		CODE NO.		CL662-4008-0-55					
		DRAWN : YJ. HAGA		14.10.23									
												 1/2	

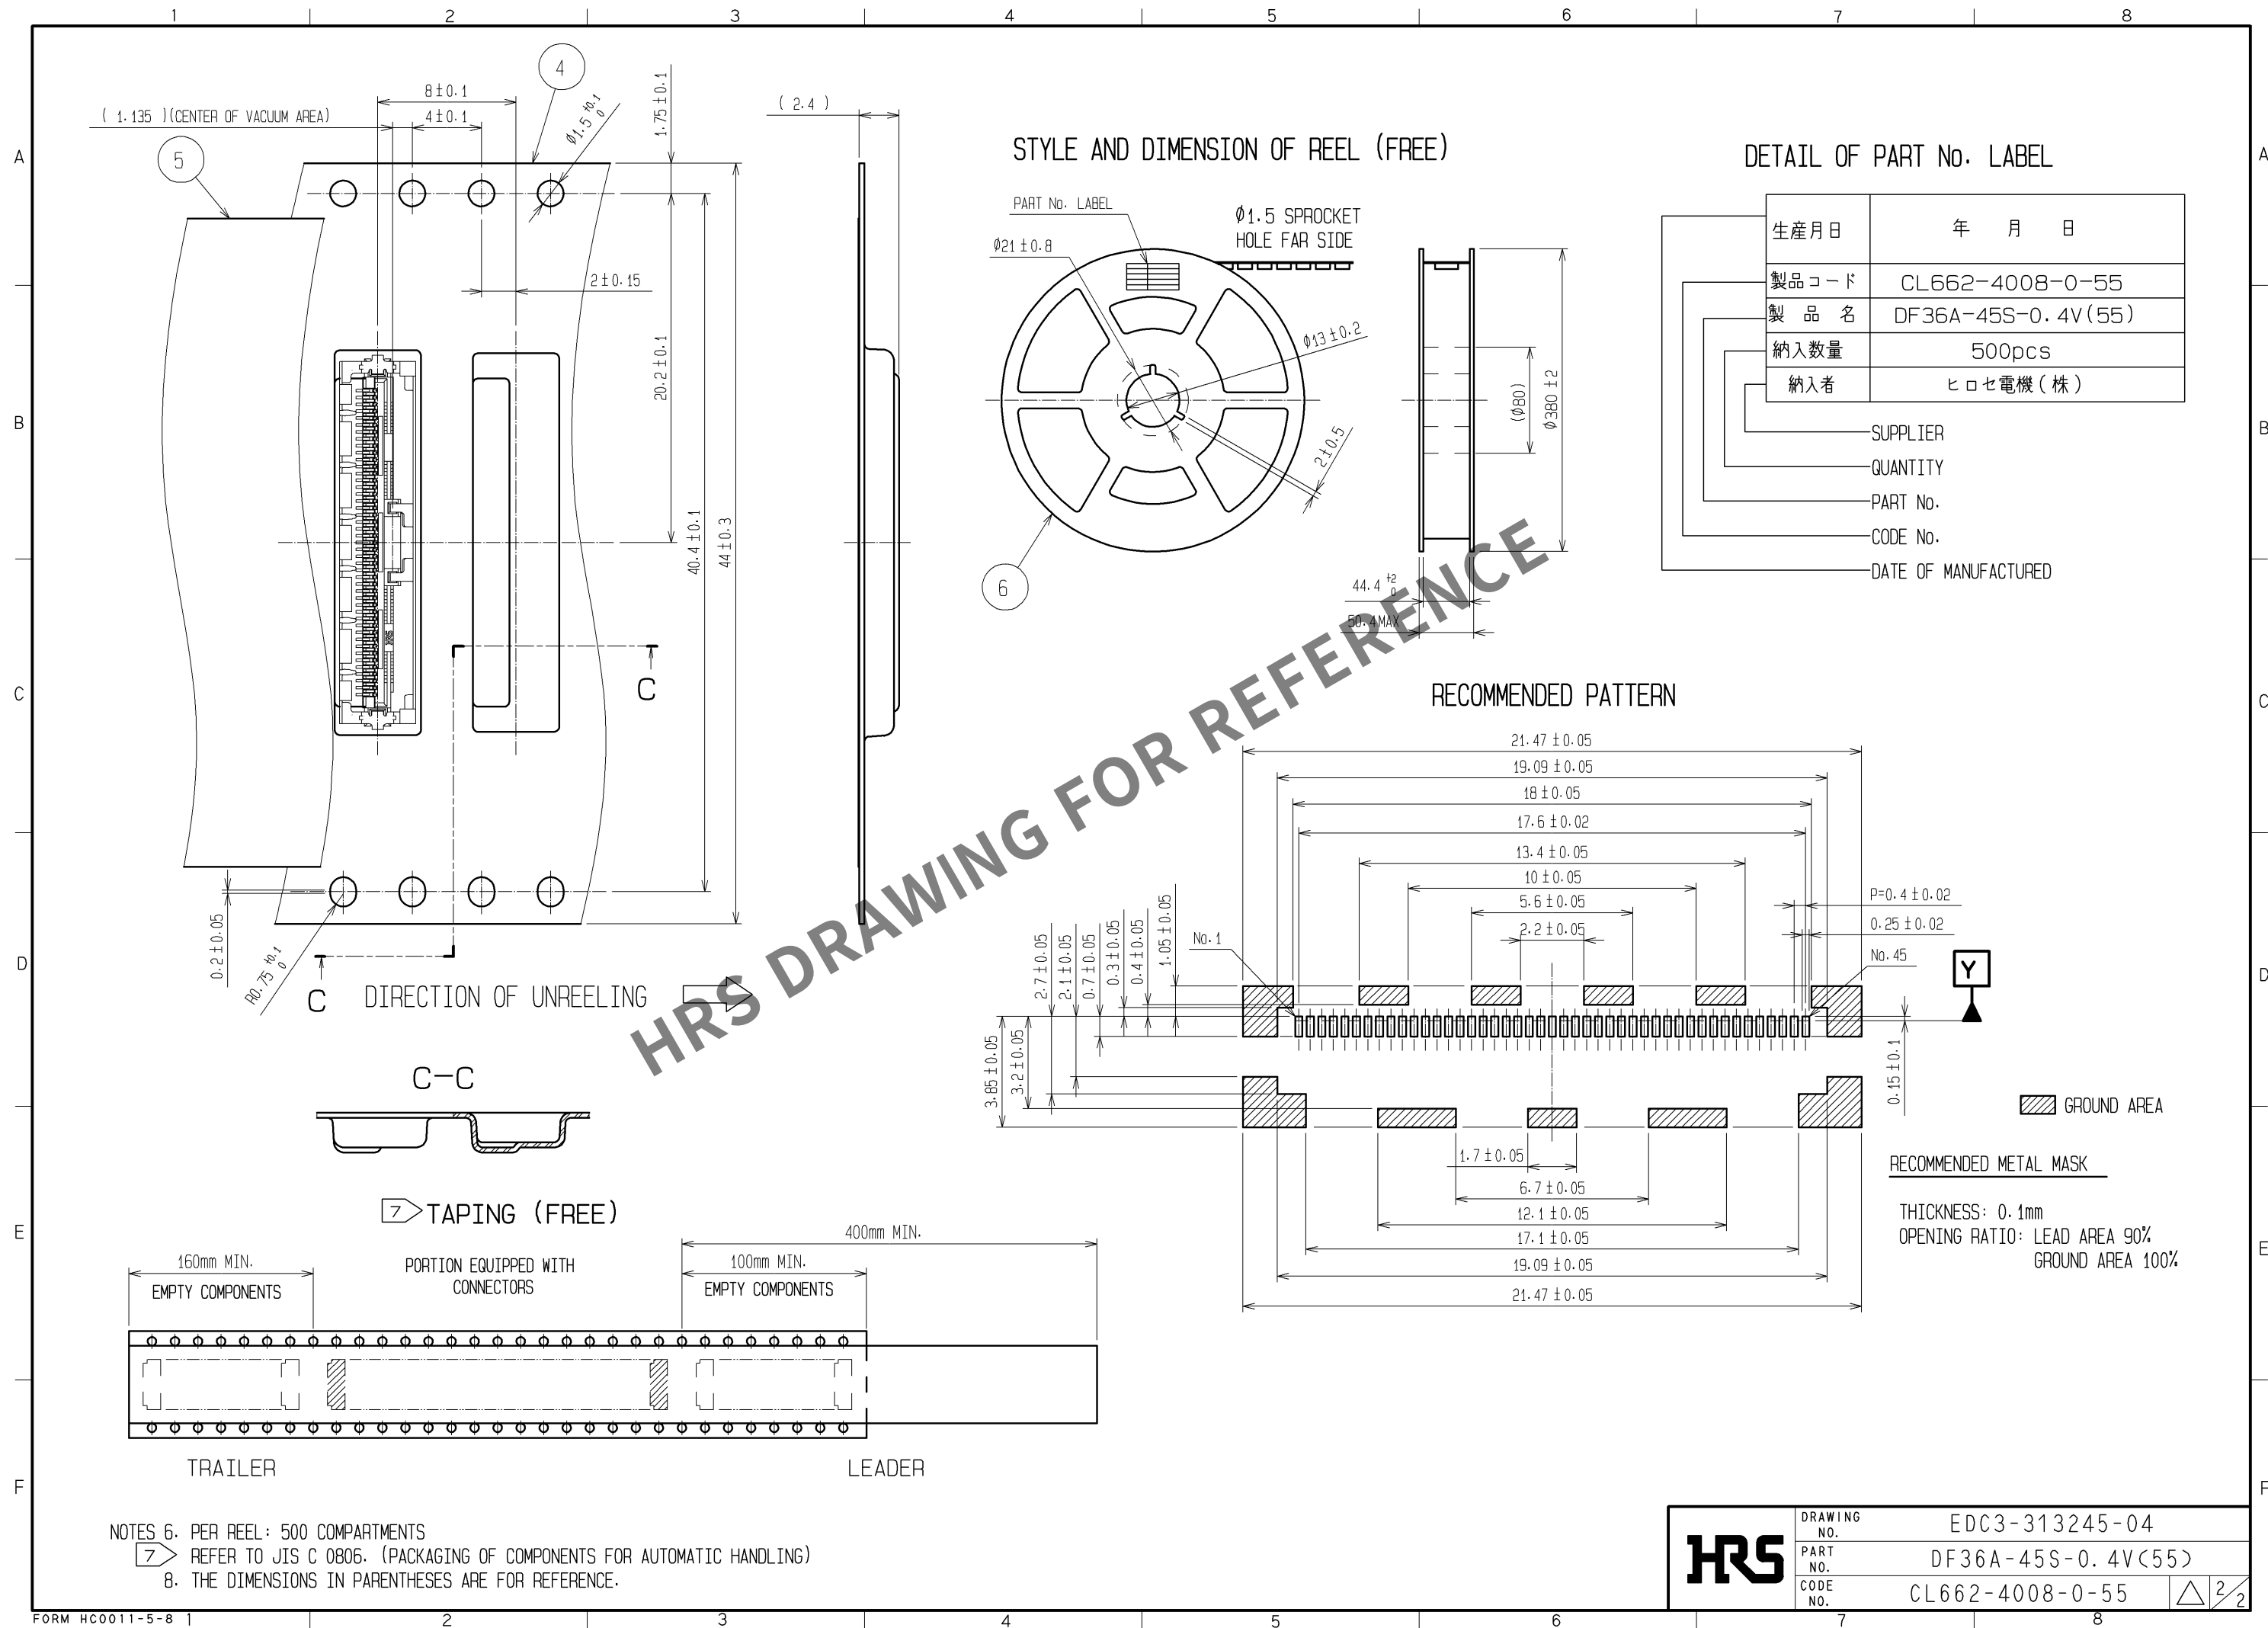

HRS

DRAWING NO.	EDC3-313245-04
PART NO.	DF36A-45S-0.4V(55)
CODE NO.	CL662-4008-0-55

