
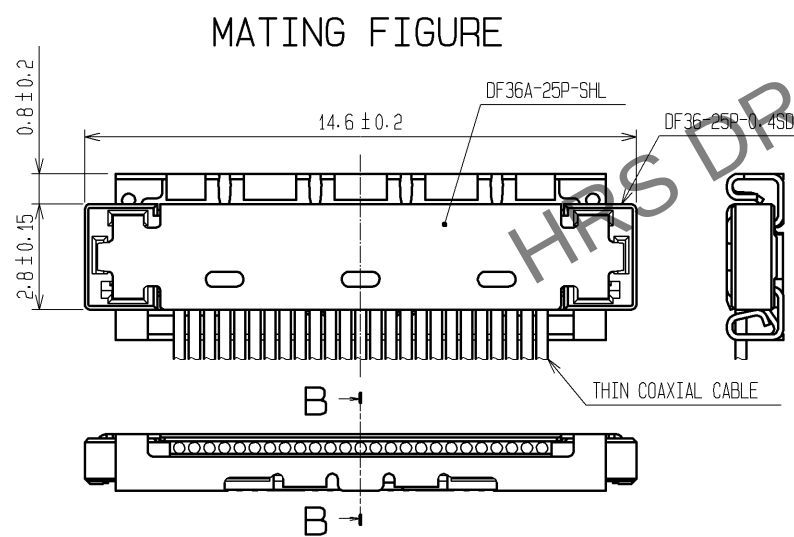
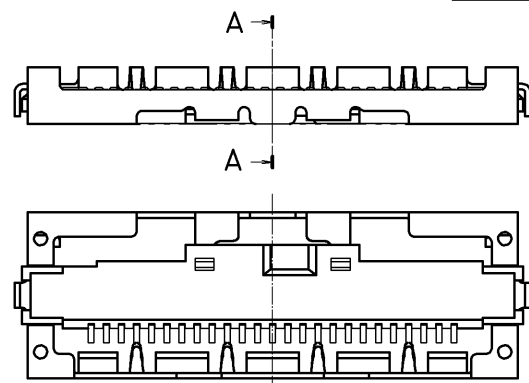


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

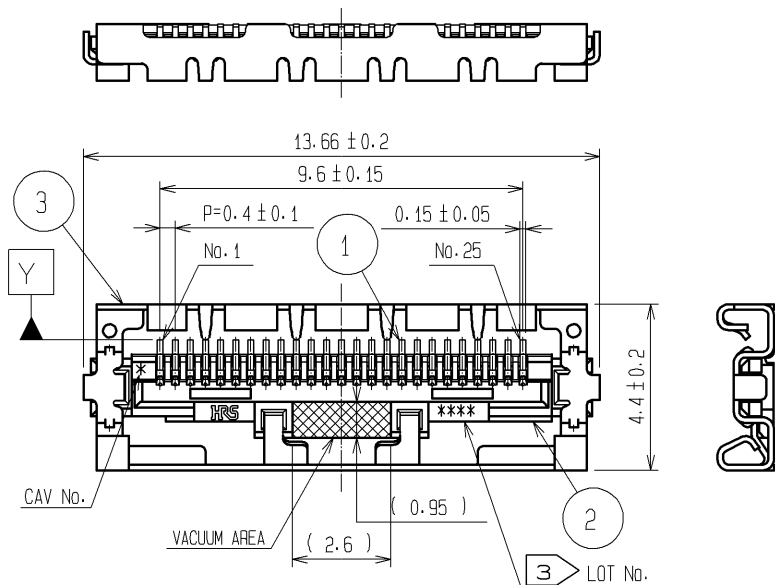


NOTES

- LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
- LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 8GFD
-YEAR: 2008 MONTH: July DAY: 15 LINE No.: 4
- UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
- SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.


3

YEAR		MONTH		DAY				LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE
10	0	Jan	A	1	1	11	B	21	M
11	1	Feb	B	2	2	12	C	22	N
12	2	Mar	C	3	3	13	D	23	P
13	3	Apr	D	4	4	14	E	24	Q
14	4	May	E	5	5	15	F	25	R
15	5	Jun	F	6	6	16	G	26	S
16	6	Jul	G	7	7	17	H	27	T
17	7	Aug	H	8	8	18	J	28	U
08	8	Sep	I	9	9	19	K	29	V
09	9	Oct	J	10	A	20	L	30	W
		Nov	K			31	X		
		Dec	L						

A-A (FREE)

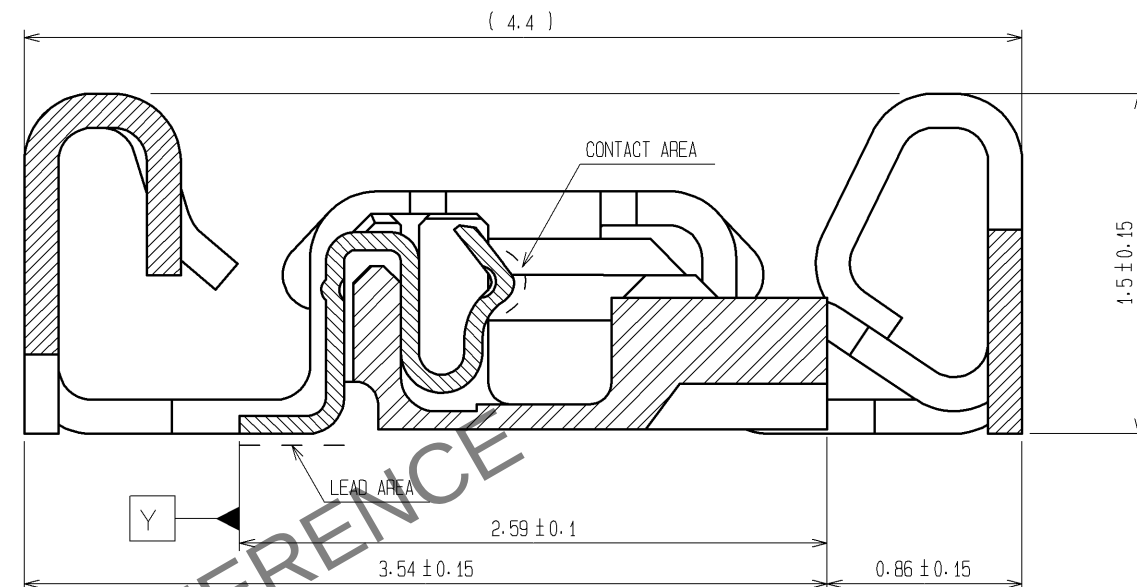

B-B (FREE)

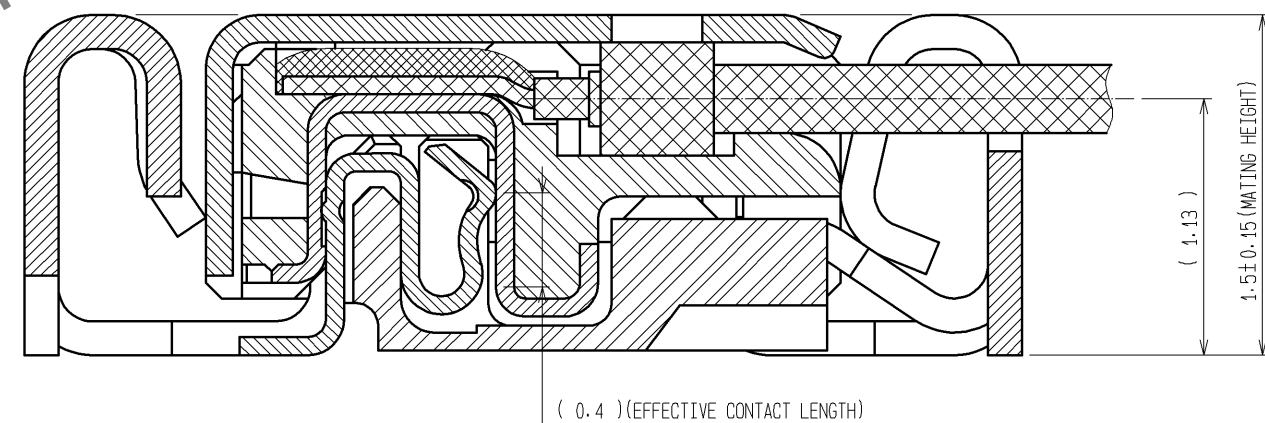

2	LCP	UL94V-0 , BLACK	6	PS	BLACK
1	PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3μm min LEAD AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	5	POLYESTER	CLEAR
NO.	MATERIAL	FINISH , REMARKS	4	PS	CLEAR
			3	PHOSPHOR BRONZE	WHOLE AREA : Tin PLATING 1μm min UNDER PLATING : Copper PLATING 0.2μm min
UNITS mm	SCALE 5 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED
HIROSE ELECTRIC CO., LTD.	APPROVED : KH. IKEDA	14.11.06	DRAWING NO.	EDC3-313271-02	
	CHECKED : MH. TSUCHIDA	14.11.06	PART NO.	DF36A-25S-0.4V(55)	
	DESIGNED : IO. DENPOUYA	14.11.06	CODE NO.	CL662-4011-4-55	
	DRAWN : YJ. HAGA	14.10.23		1/2	

