

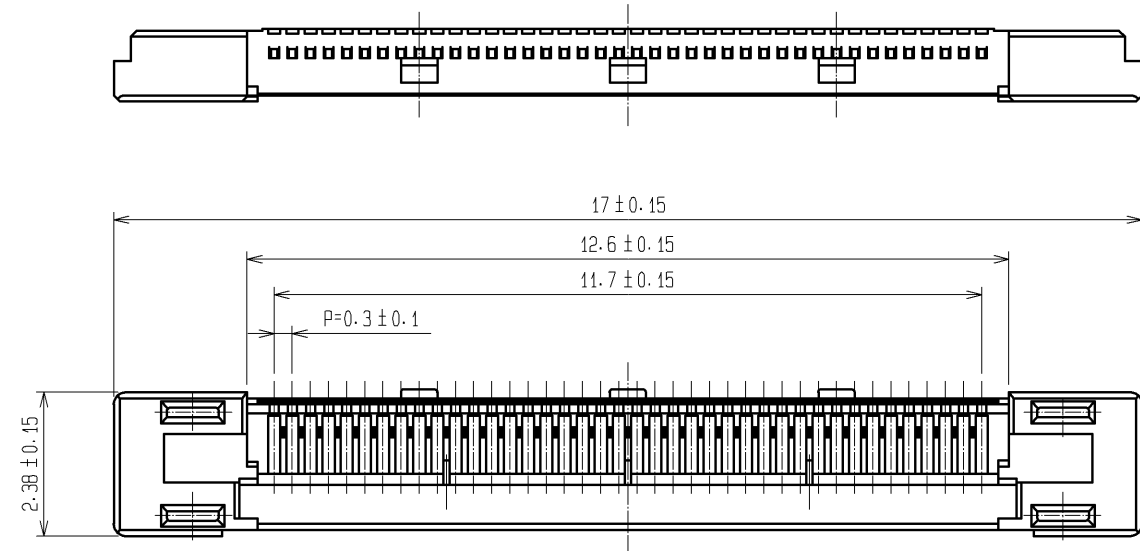
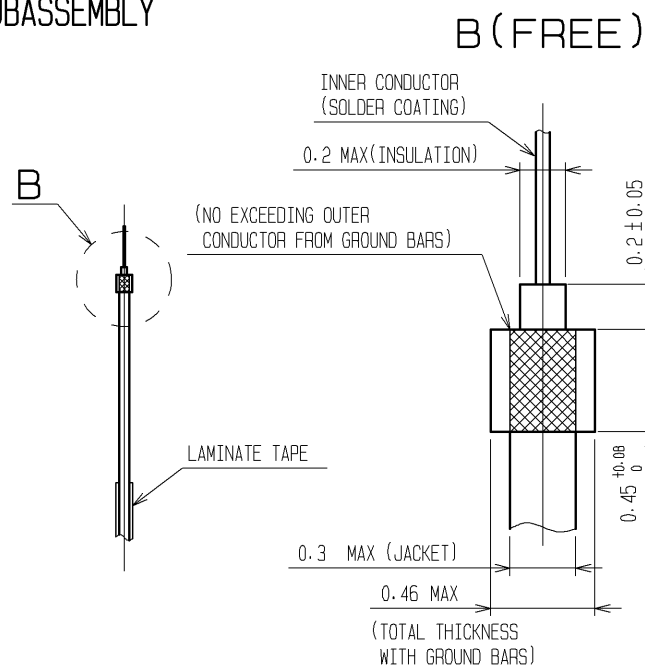



RECOMMENDED CABLE SUBASSEMBLY

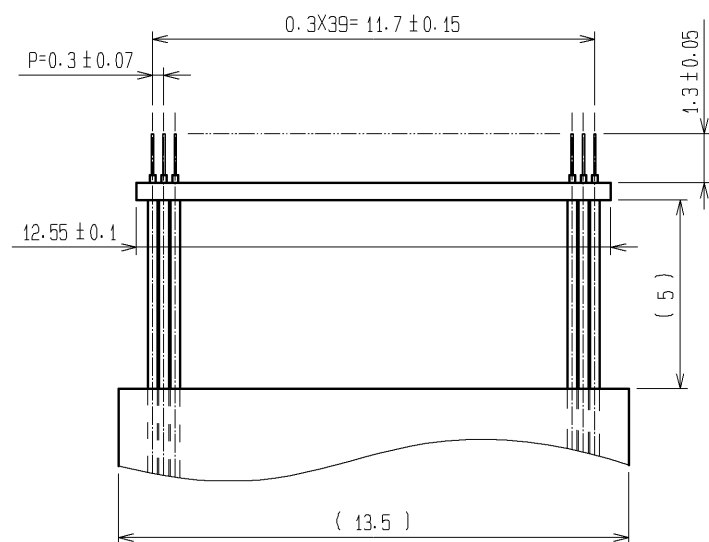

A-A (20:1)

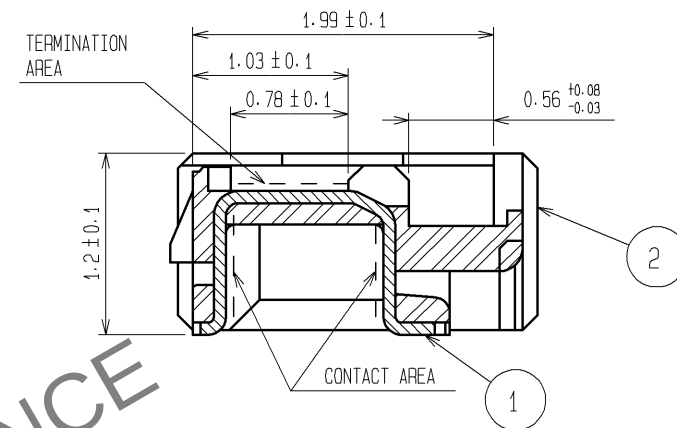


CABLE TERMINATION FIGURE(20:1)

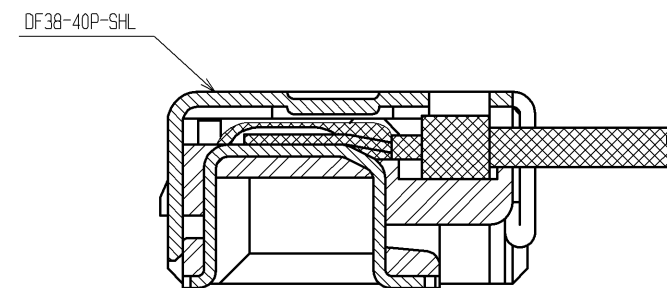


- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE(AWG#42~AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS[CONNECTOR UNIT, AND METAL SHIELDING]. REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF38-40P-0.3SD(51)	CL662-4502-6-51
-	METAL SHIELDING	DF38-40P-SHL	CL662-4503-9

2	LCP	UL94V-0・BLACK		5	PS	BLACK			
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.1μm min		4	POLYESTER	CLEAR			
		TERMINATION AREA : Au PLATING 0.1μm min		3	PS	CLEAR			
UNDER PLATING : Ni PLATING 1μm min									
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE FREE		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : TS. SAKATA		13. 07. 12		DRAWING NO.		EDC3-310479-01		
	CHECKED : TS. SAKATA		13. 07. 12		PART NO.		DF38-40P-0. 3SD<51>		
	DESIGNED : TP. MATSUMOTO		13. 07. 11		CODE NO.		CL662-4502-6-51		
	DRAWN : TP. MATSUMOTO		13. 07. 11				 1/2		

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

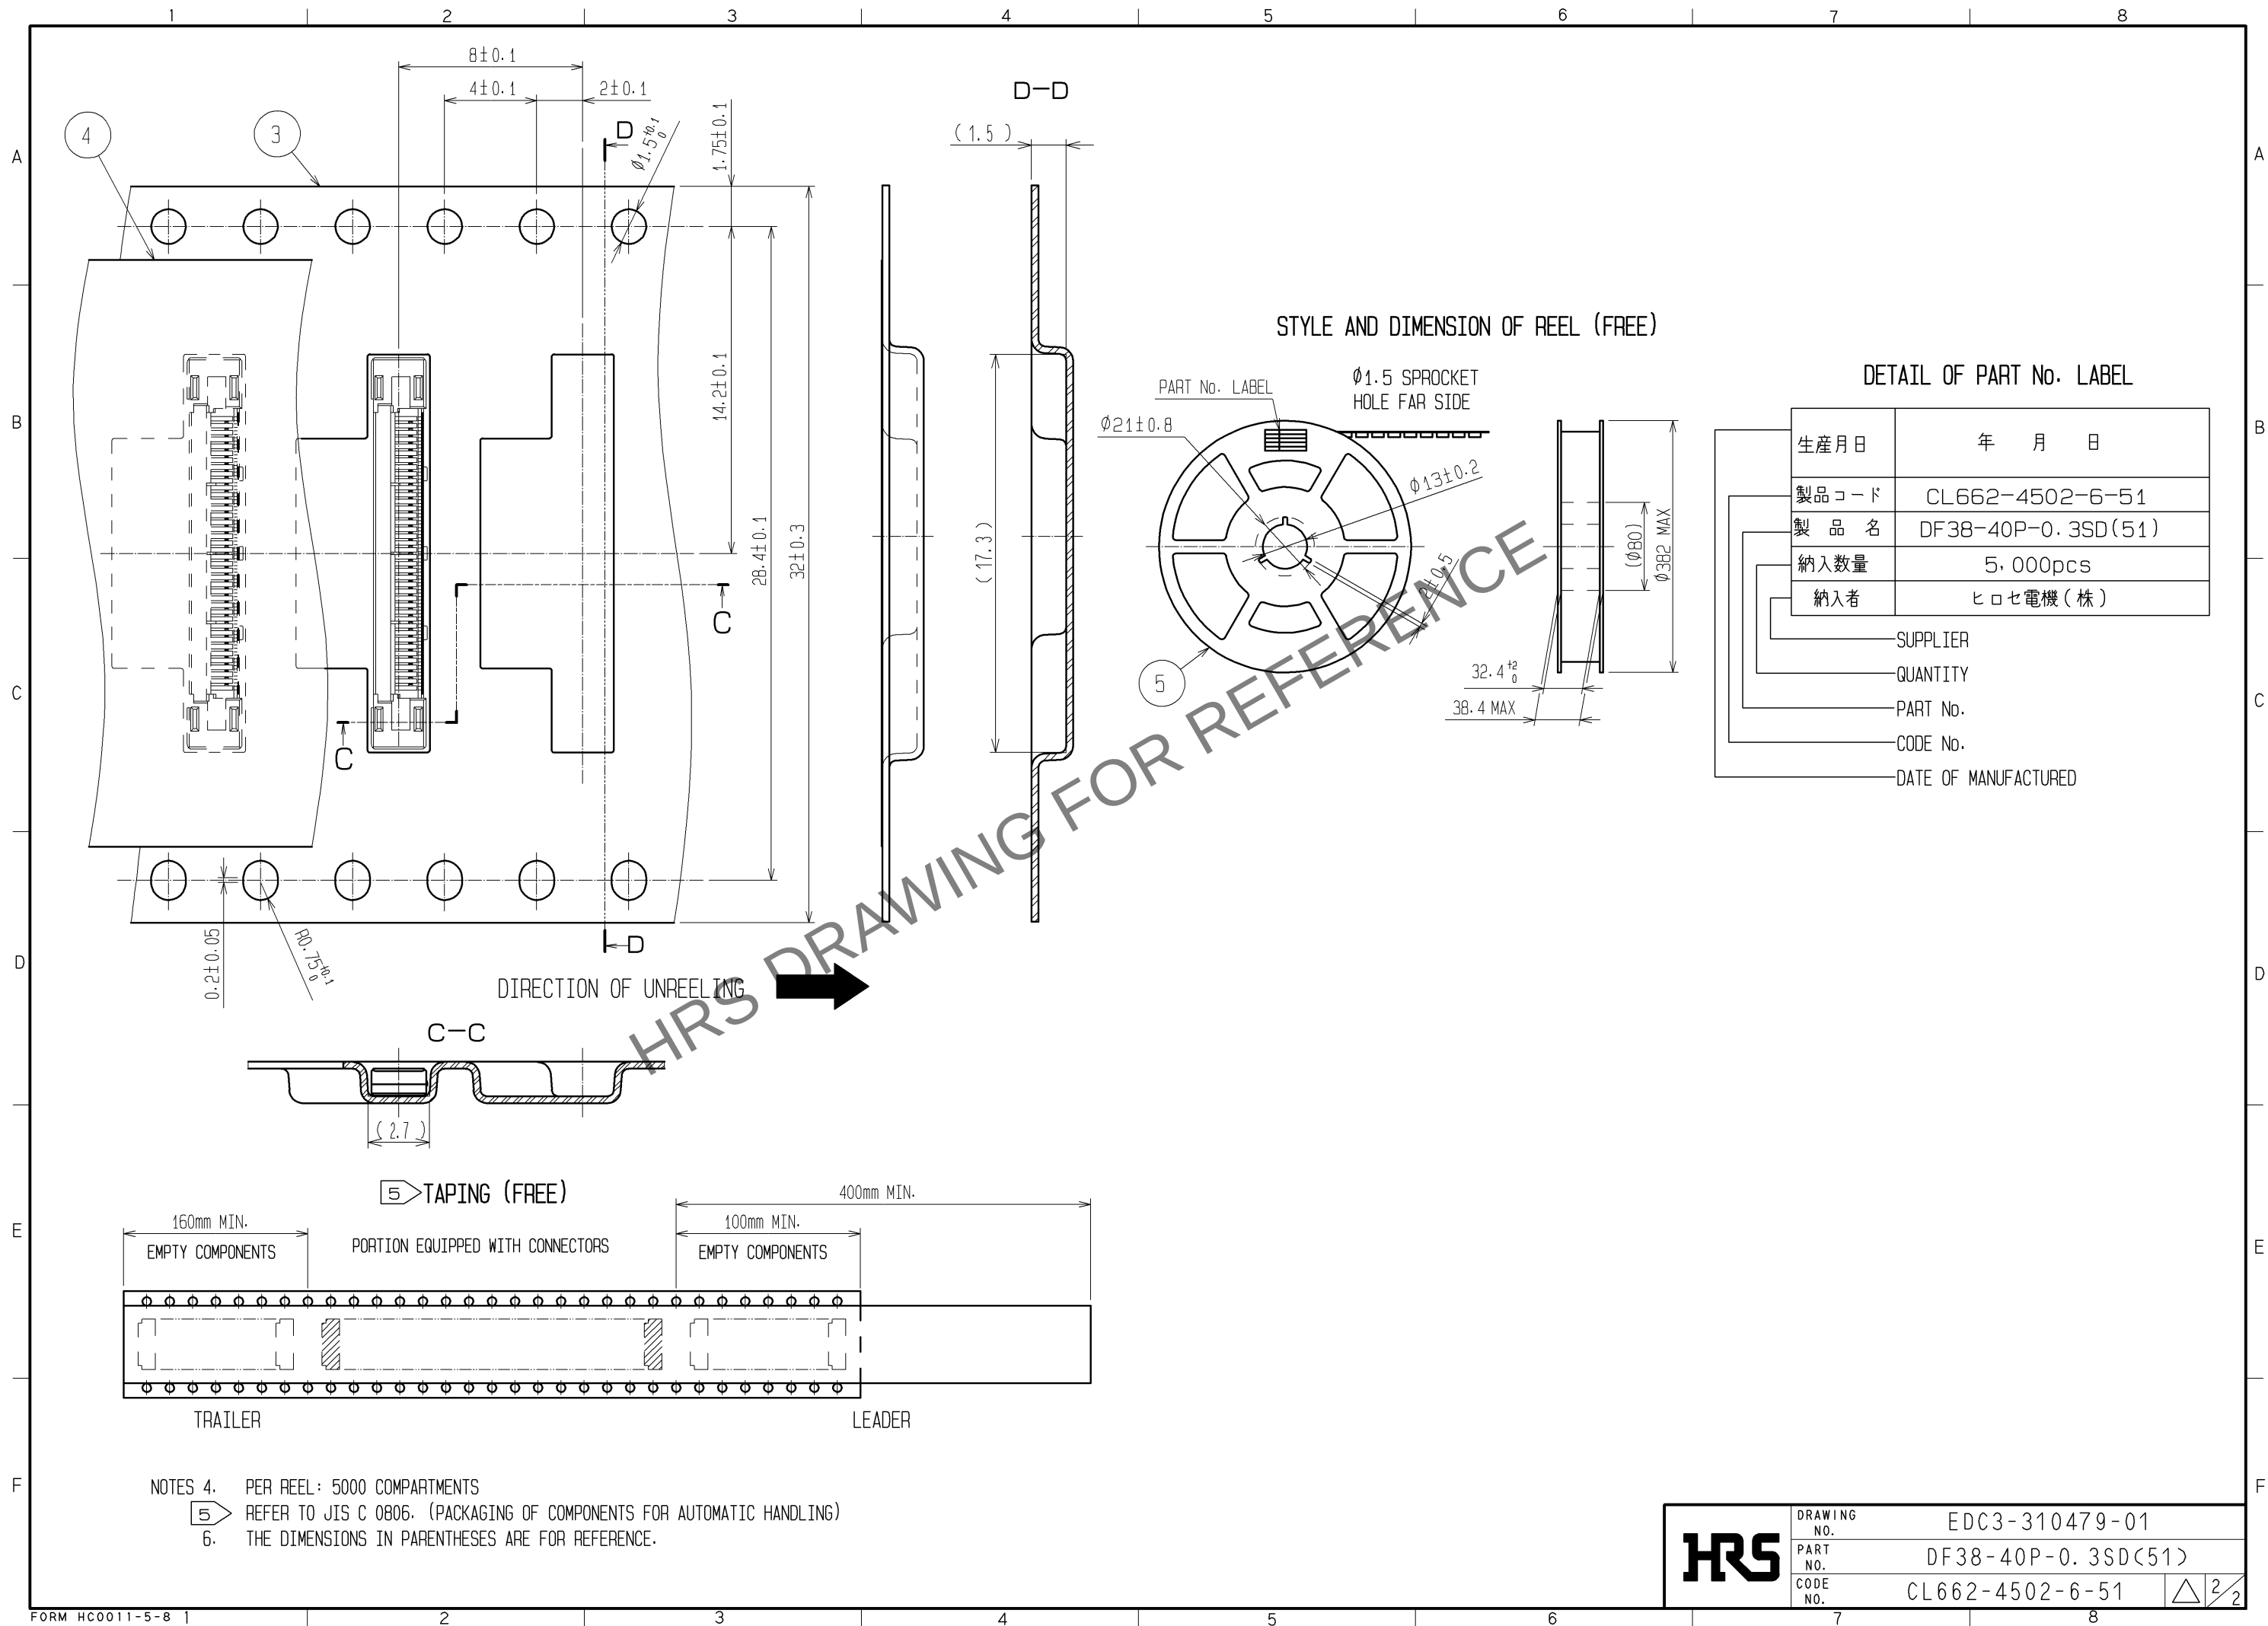

HRS	DRAWING NO.	EDC3-310479-01	
	PART NO.	DF38-40P-0.3SD(51)	
	CODE NO.	CL662-4502-6-51	2/2