
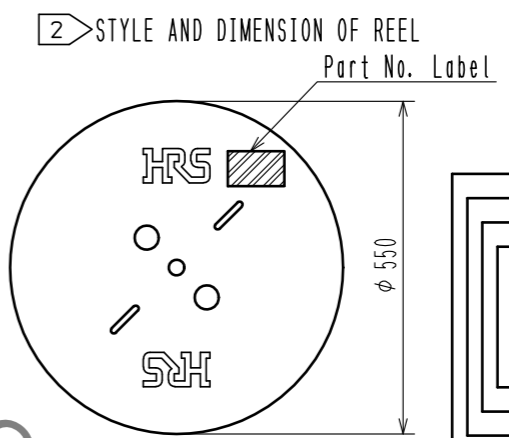
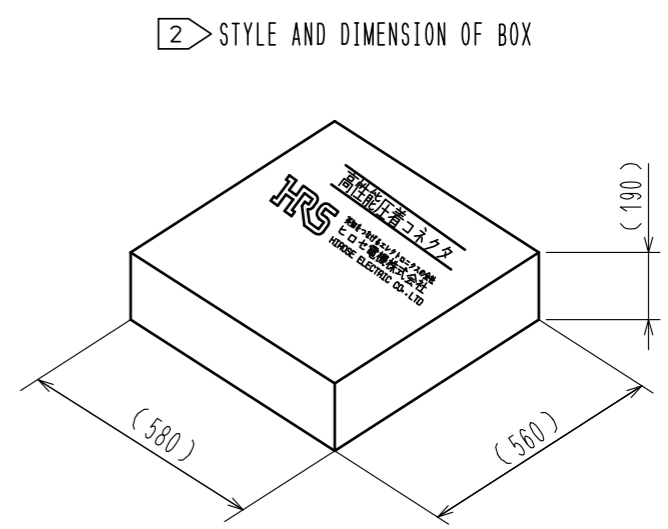


Jun.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

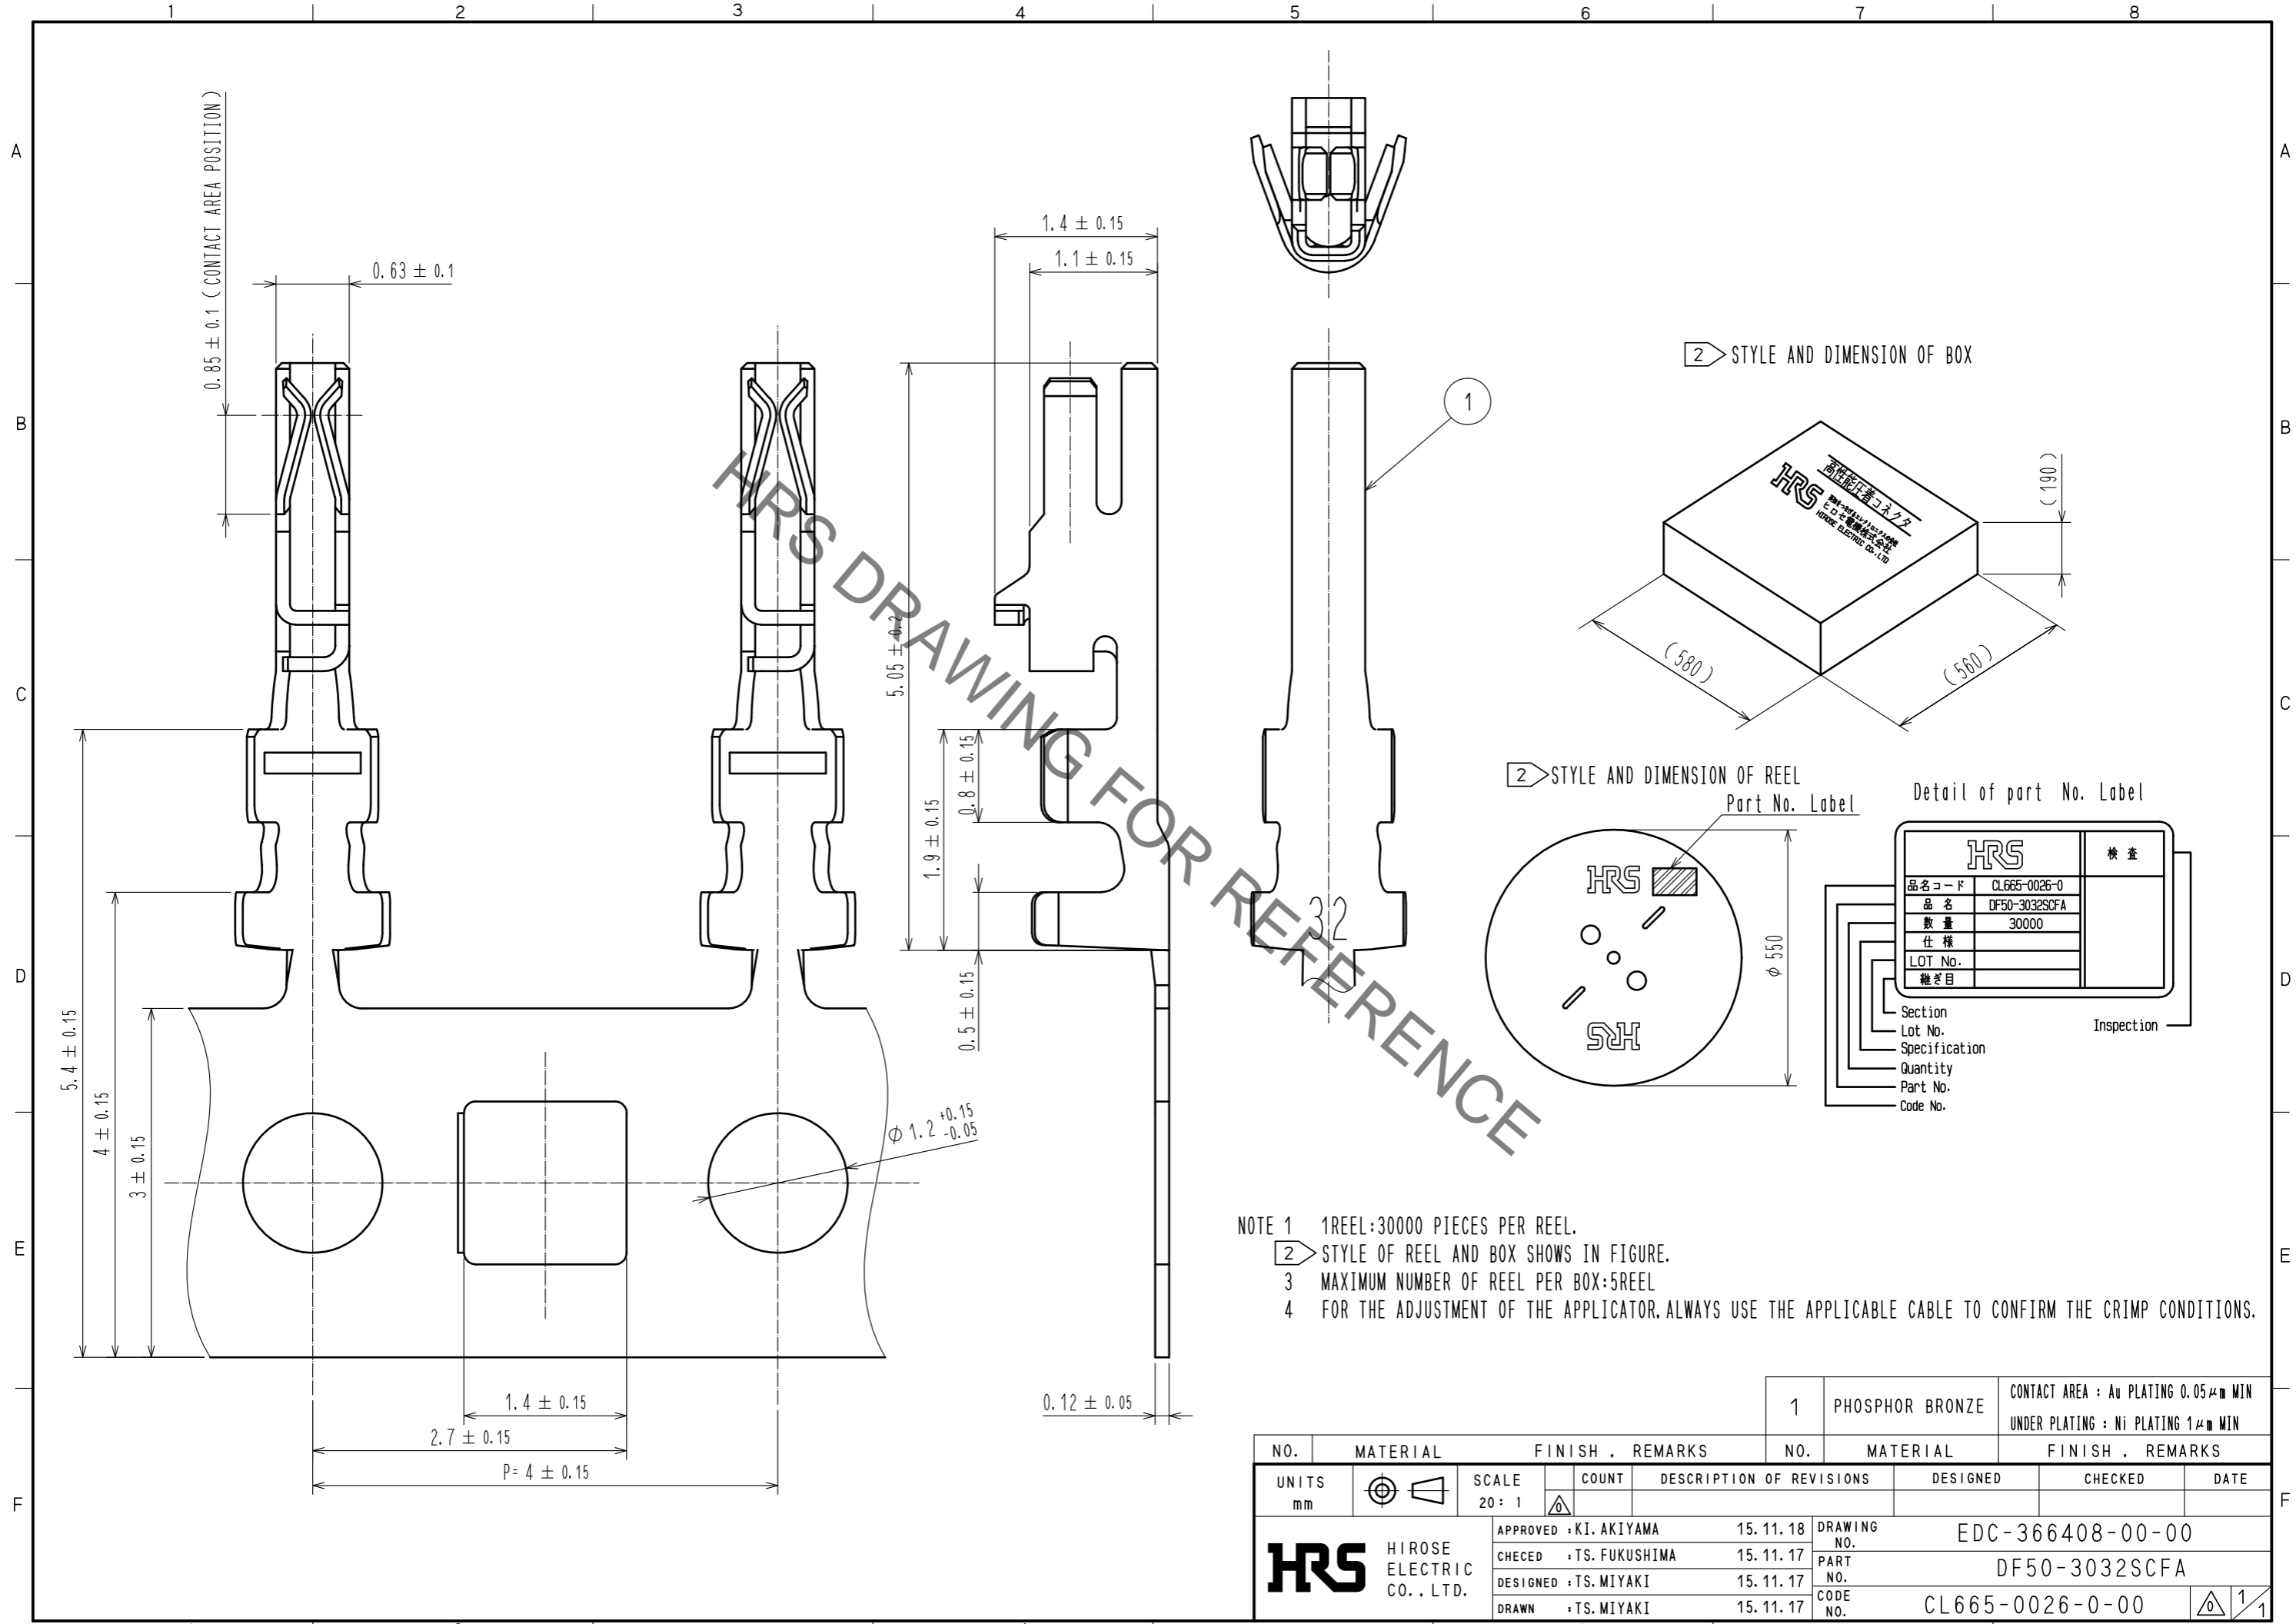

Detail of part No. Label

HRS		検査
品名コード	CL665-0026-0	
品名	DF50-3032SCFA	
数量	30000	
仕様		
LOT No.		
継ぎ目		

Section
Lot No.
Specification
Quantity
Part No.
Code No.

Inspection

- NOTE 1 1REEL:30000 PIECES PER REEL.
 2 STYLE OF REEL AND BOX SHOWS IN FIGURE.
 3 MAXIMUM NUMBER OF REEL PER BOX:5REEL
 4 FOR THE ADJUSTMENT OF THE APPLICATOR, ALWAYS USE THE APPLICABLE CABLE TO CONFIRM THE CRIMP CONDITIONS.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
			1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.05μm MIN UNDER PLATING : Ni PLATING 1μm MIN
UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS		
mm	20 : 1	△	DESIGNED	CHECKED	DATE
APPROVED : KI. AKIYAMA		15.11.18	DRAWING NO. EDC-366408-00-00		
CHECKED : TS. FUKUSHIMA		15.11.17	PART NO. DF50-3032SCFA		
DESIGNED : TS. MIYAKI		15.11.17	CODE NO. CL665-0026-0-00		
DRAWN : TS. MIYAKI		15.11.17	1/1		