


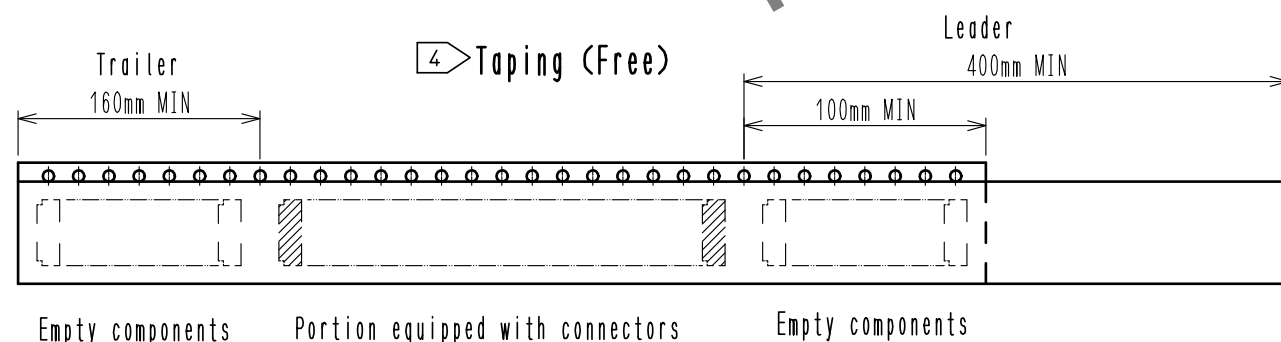


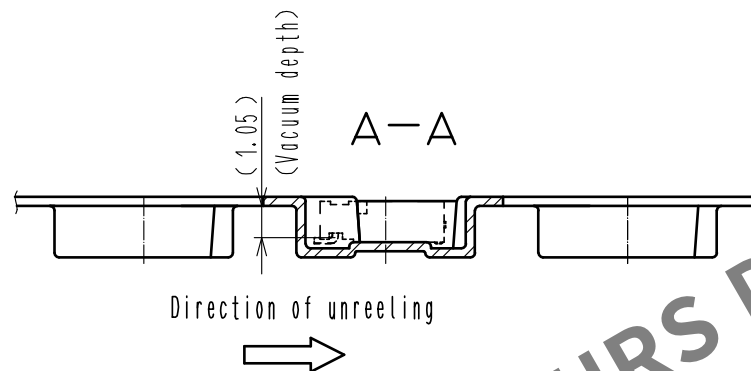


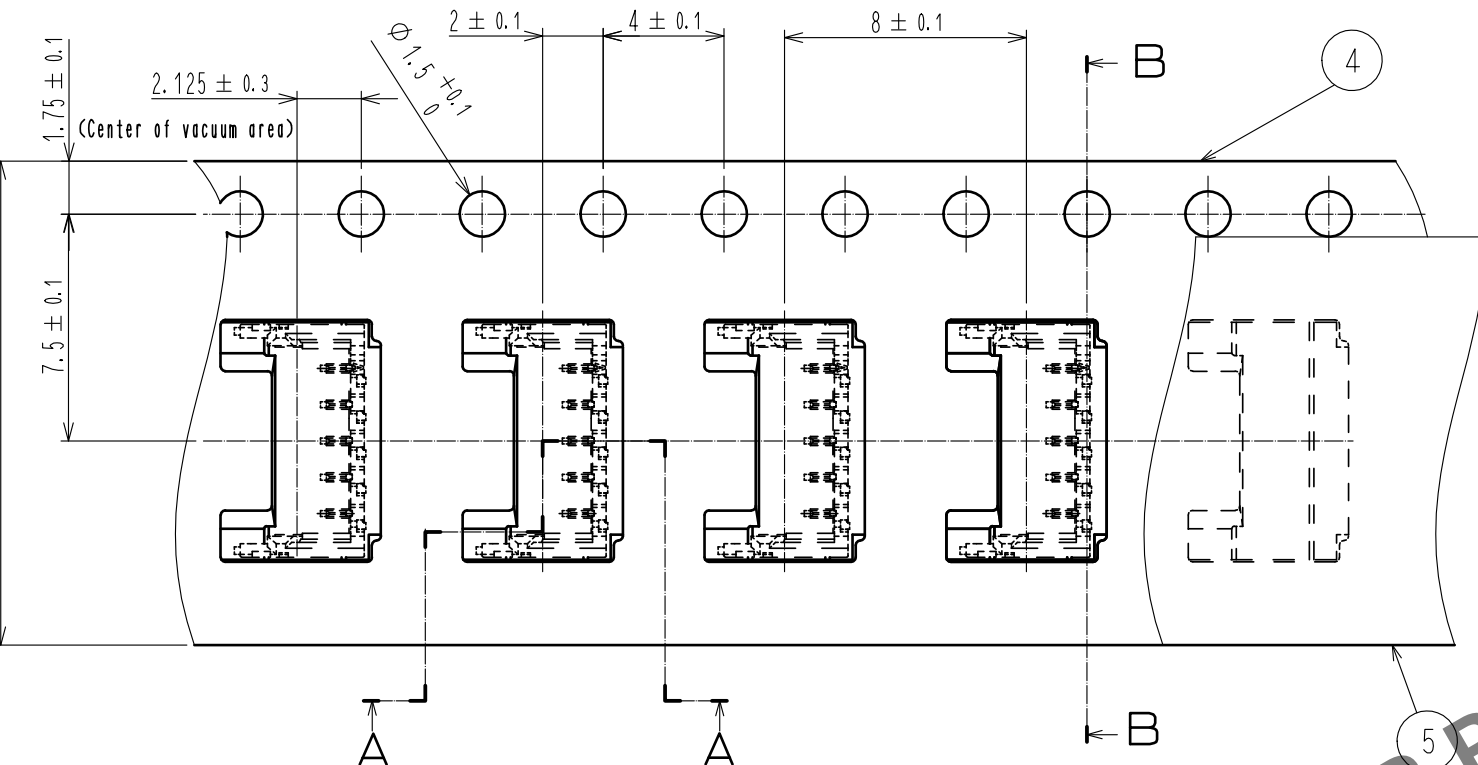

- Notes
- 1 reel : 5000 connectors.
 - Refer to JIS C 0806. (Packaging of components for automatic handling)
 - The dimensions in parentheses are for reference.
 - UL recognized (File No.E52653)
 - cUL recognized (File No.E52653)

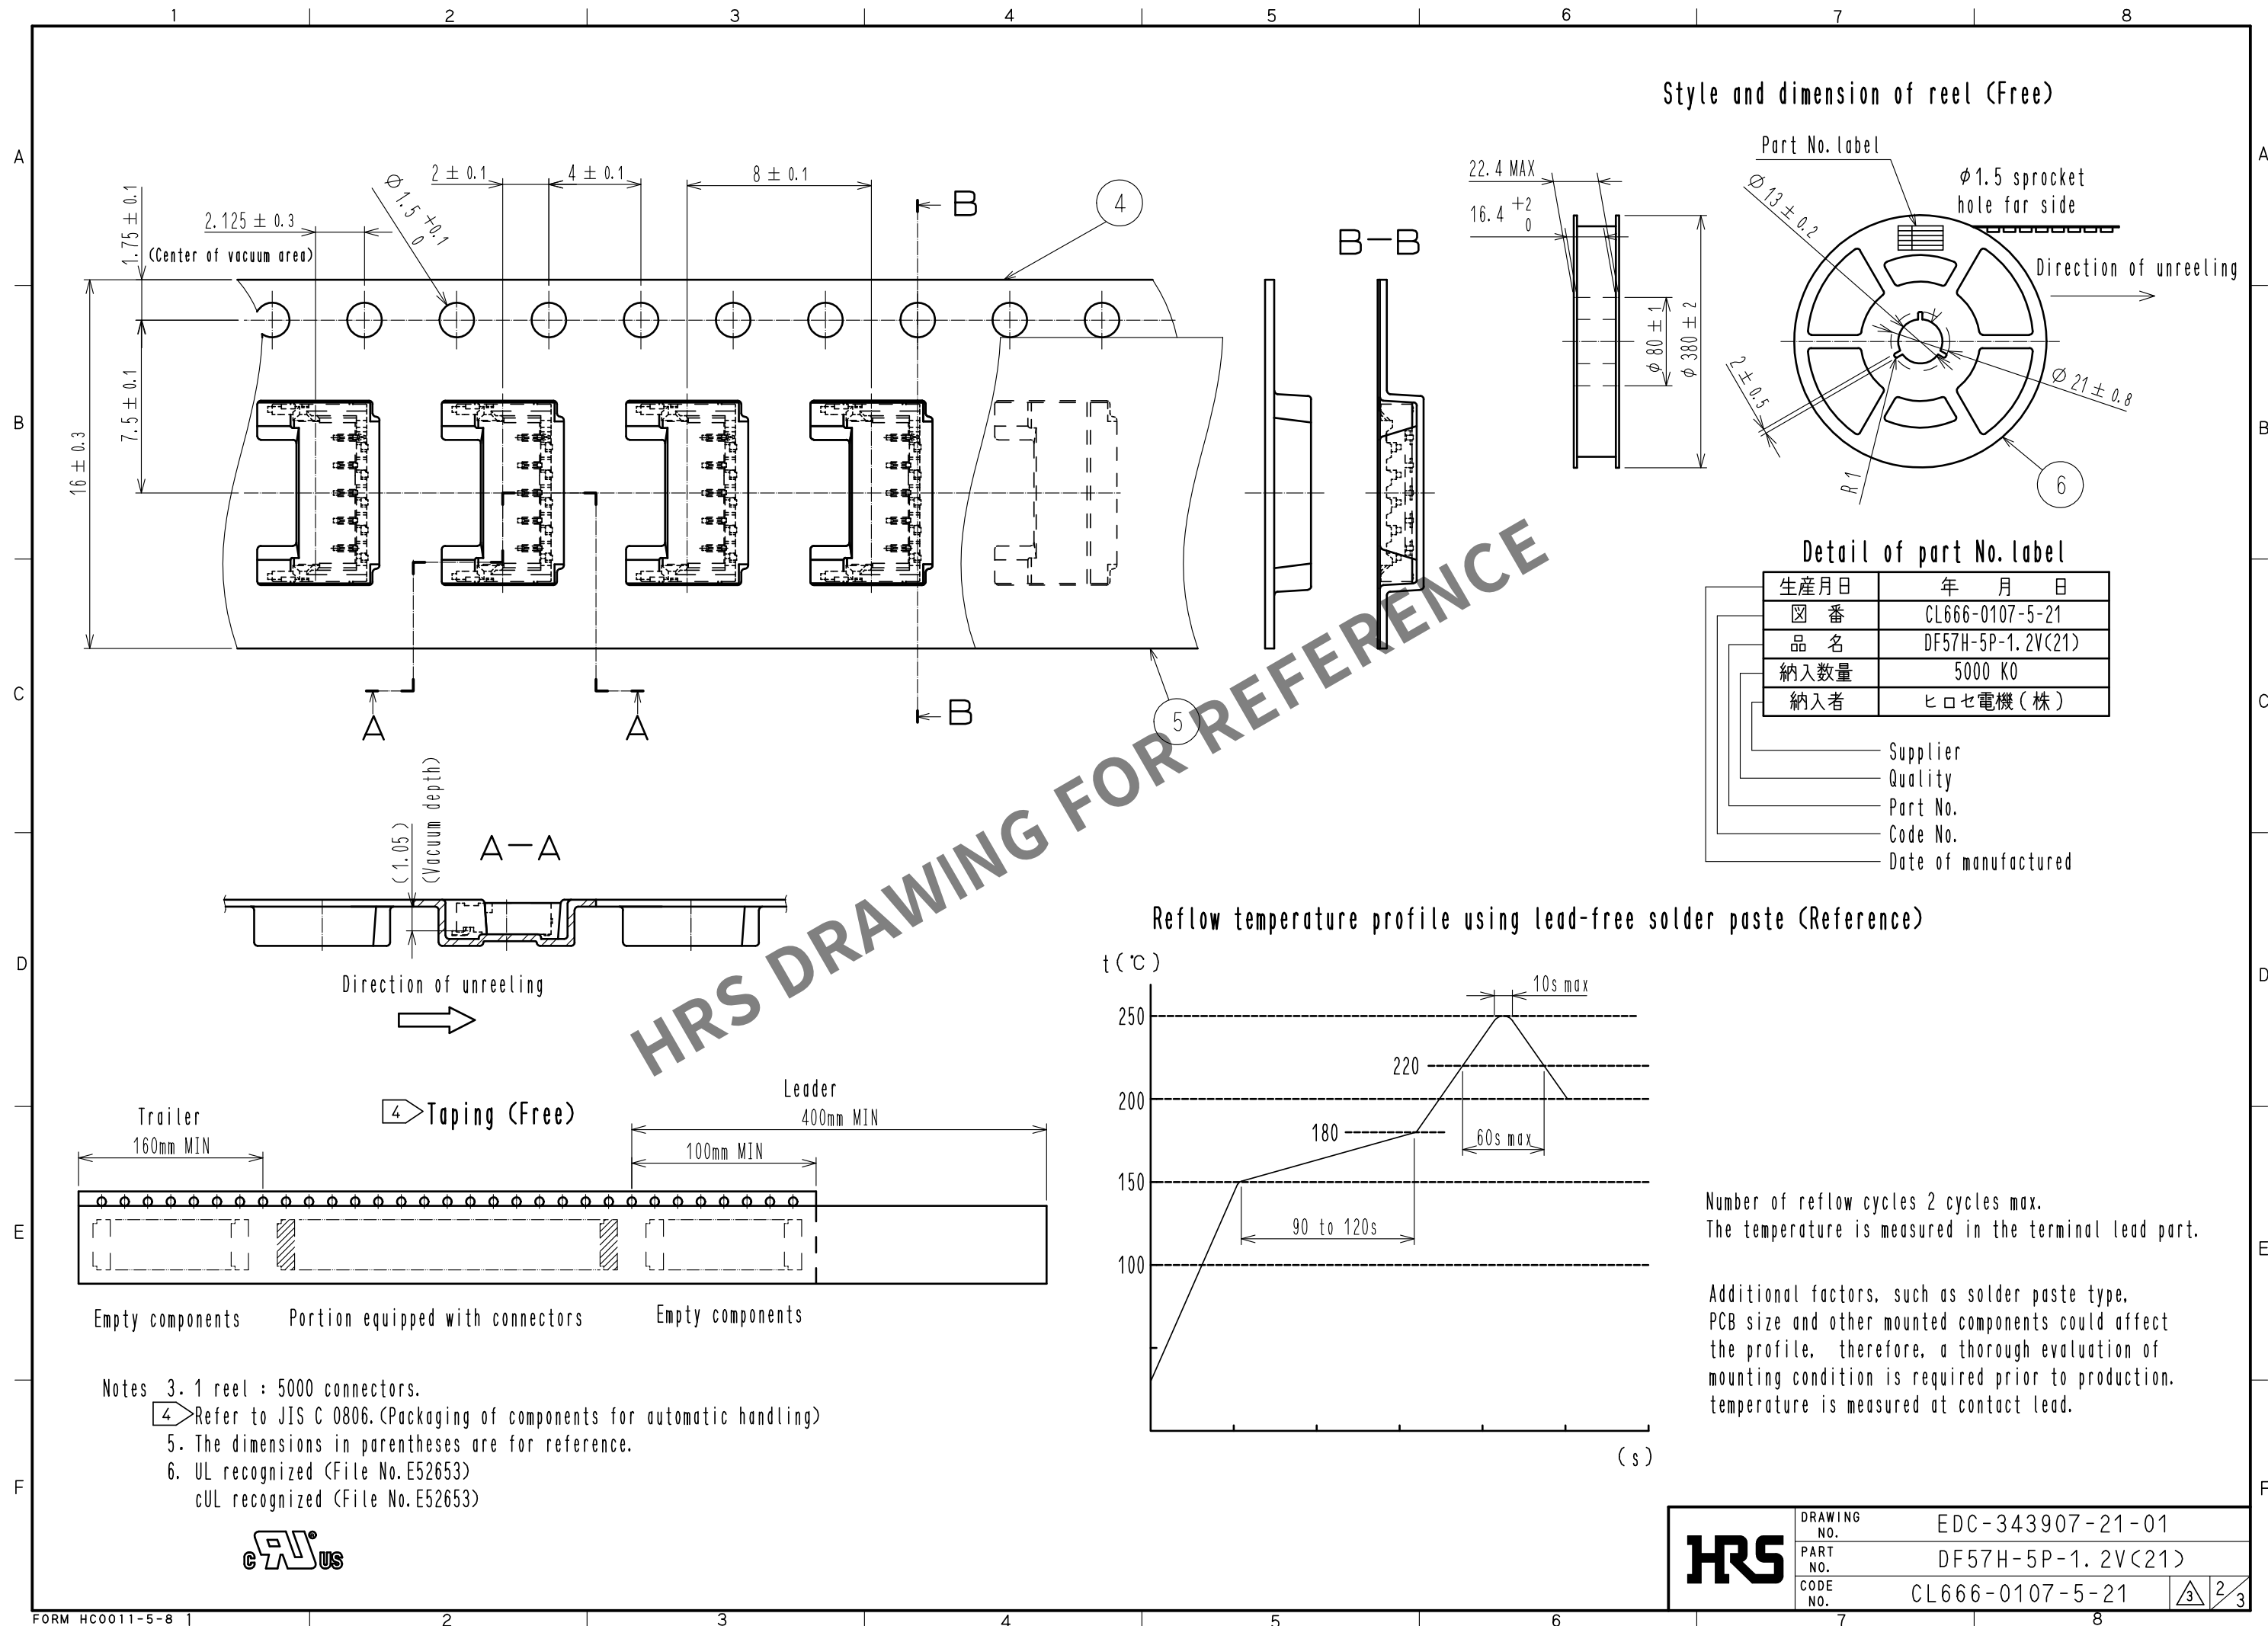

DRAWING NO.	EDC-343907-21-01
PART NO.	DF57H-5P-1.2V(21)
CODE NO.	CL666-0107-5-21




Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


DF57 Series Mating / Unmating Operation Instruction

Mating


①By positioning the convexity of the socket sides to the header concavity, align the centers of the socket and the header in pitch direction.

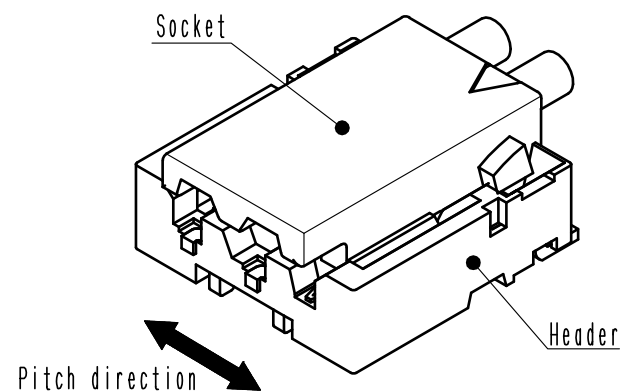

②Slightly press the socket down at cable side to tilted angle.

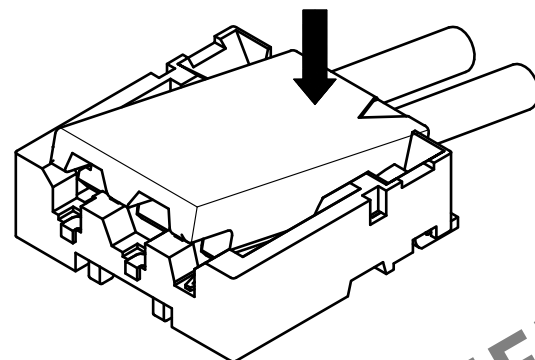


③Press down at the lever side with stabilizing the cable side to insert. Mating completes.

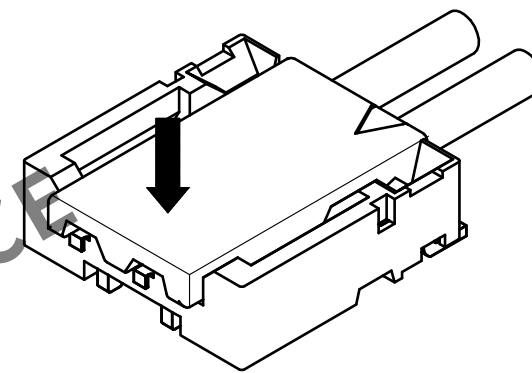


Unmating


①Hook the lever with finger nail.

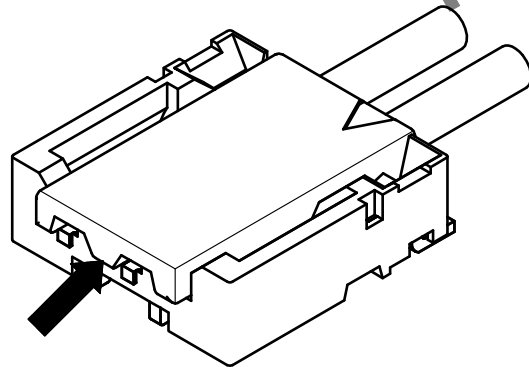

②Lift up to the upper direction and friction lock is released.

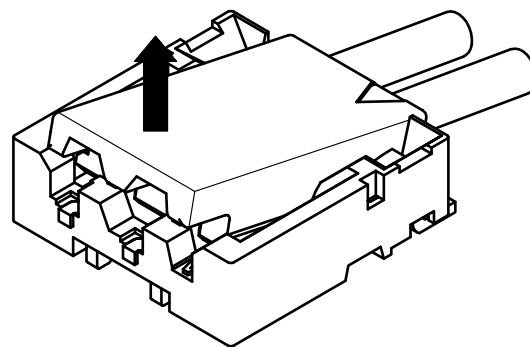

③Lift up to the upper direction and positive lock is released. Removal completes.

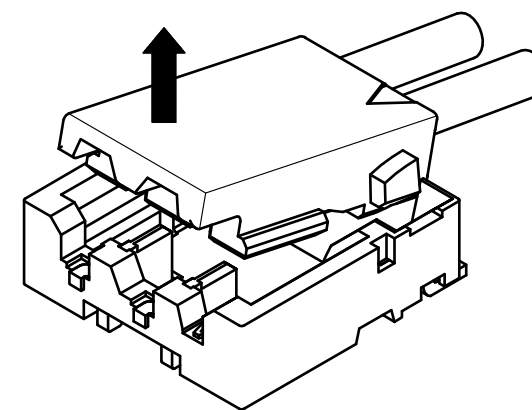

HRS

DRAWING NO.	EDC-343907-21-01
PART NO.	DF57H-5P-1.2V(21)
CODE NO.	CL666-0107-5-21

3/3