


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

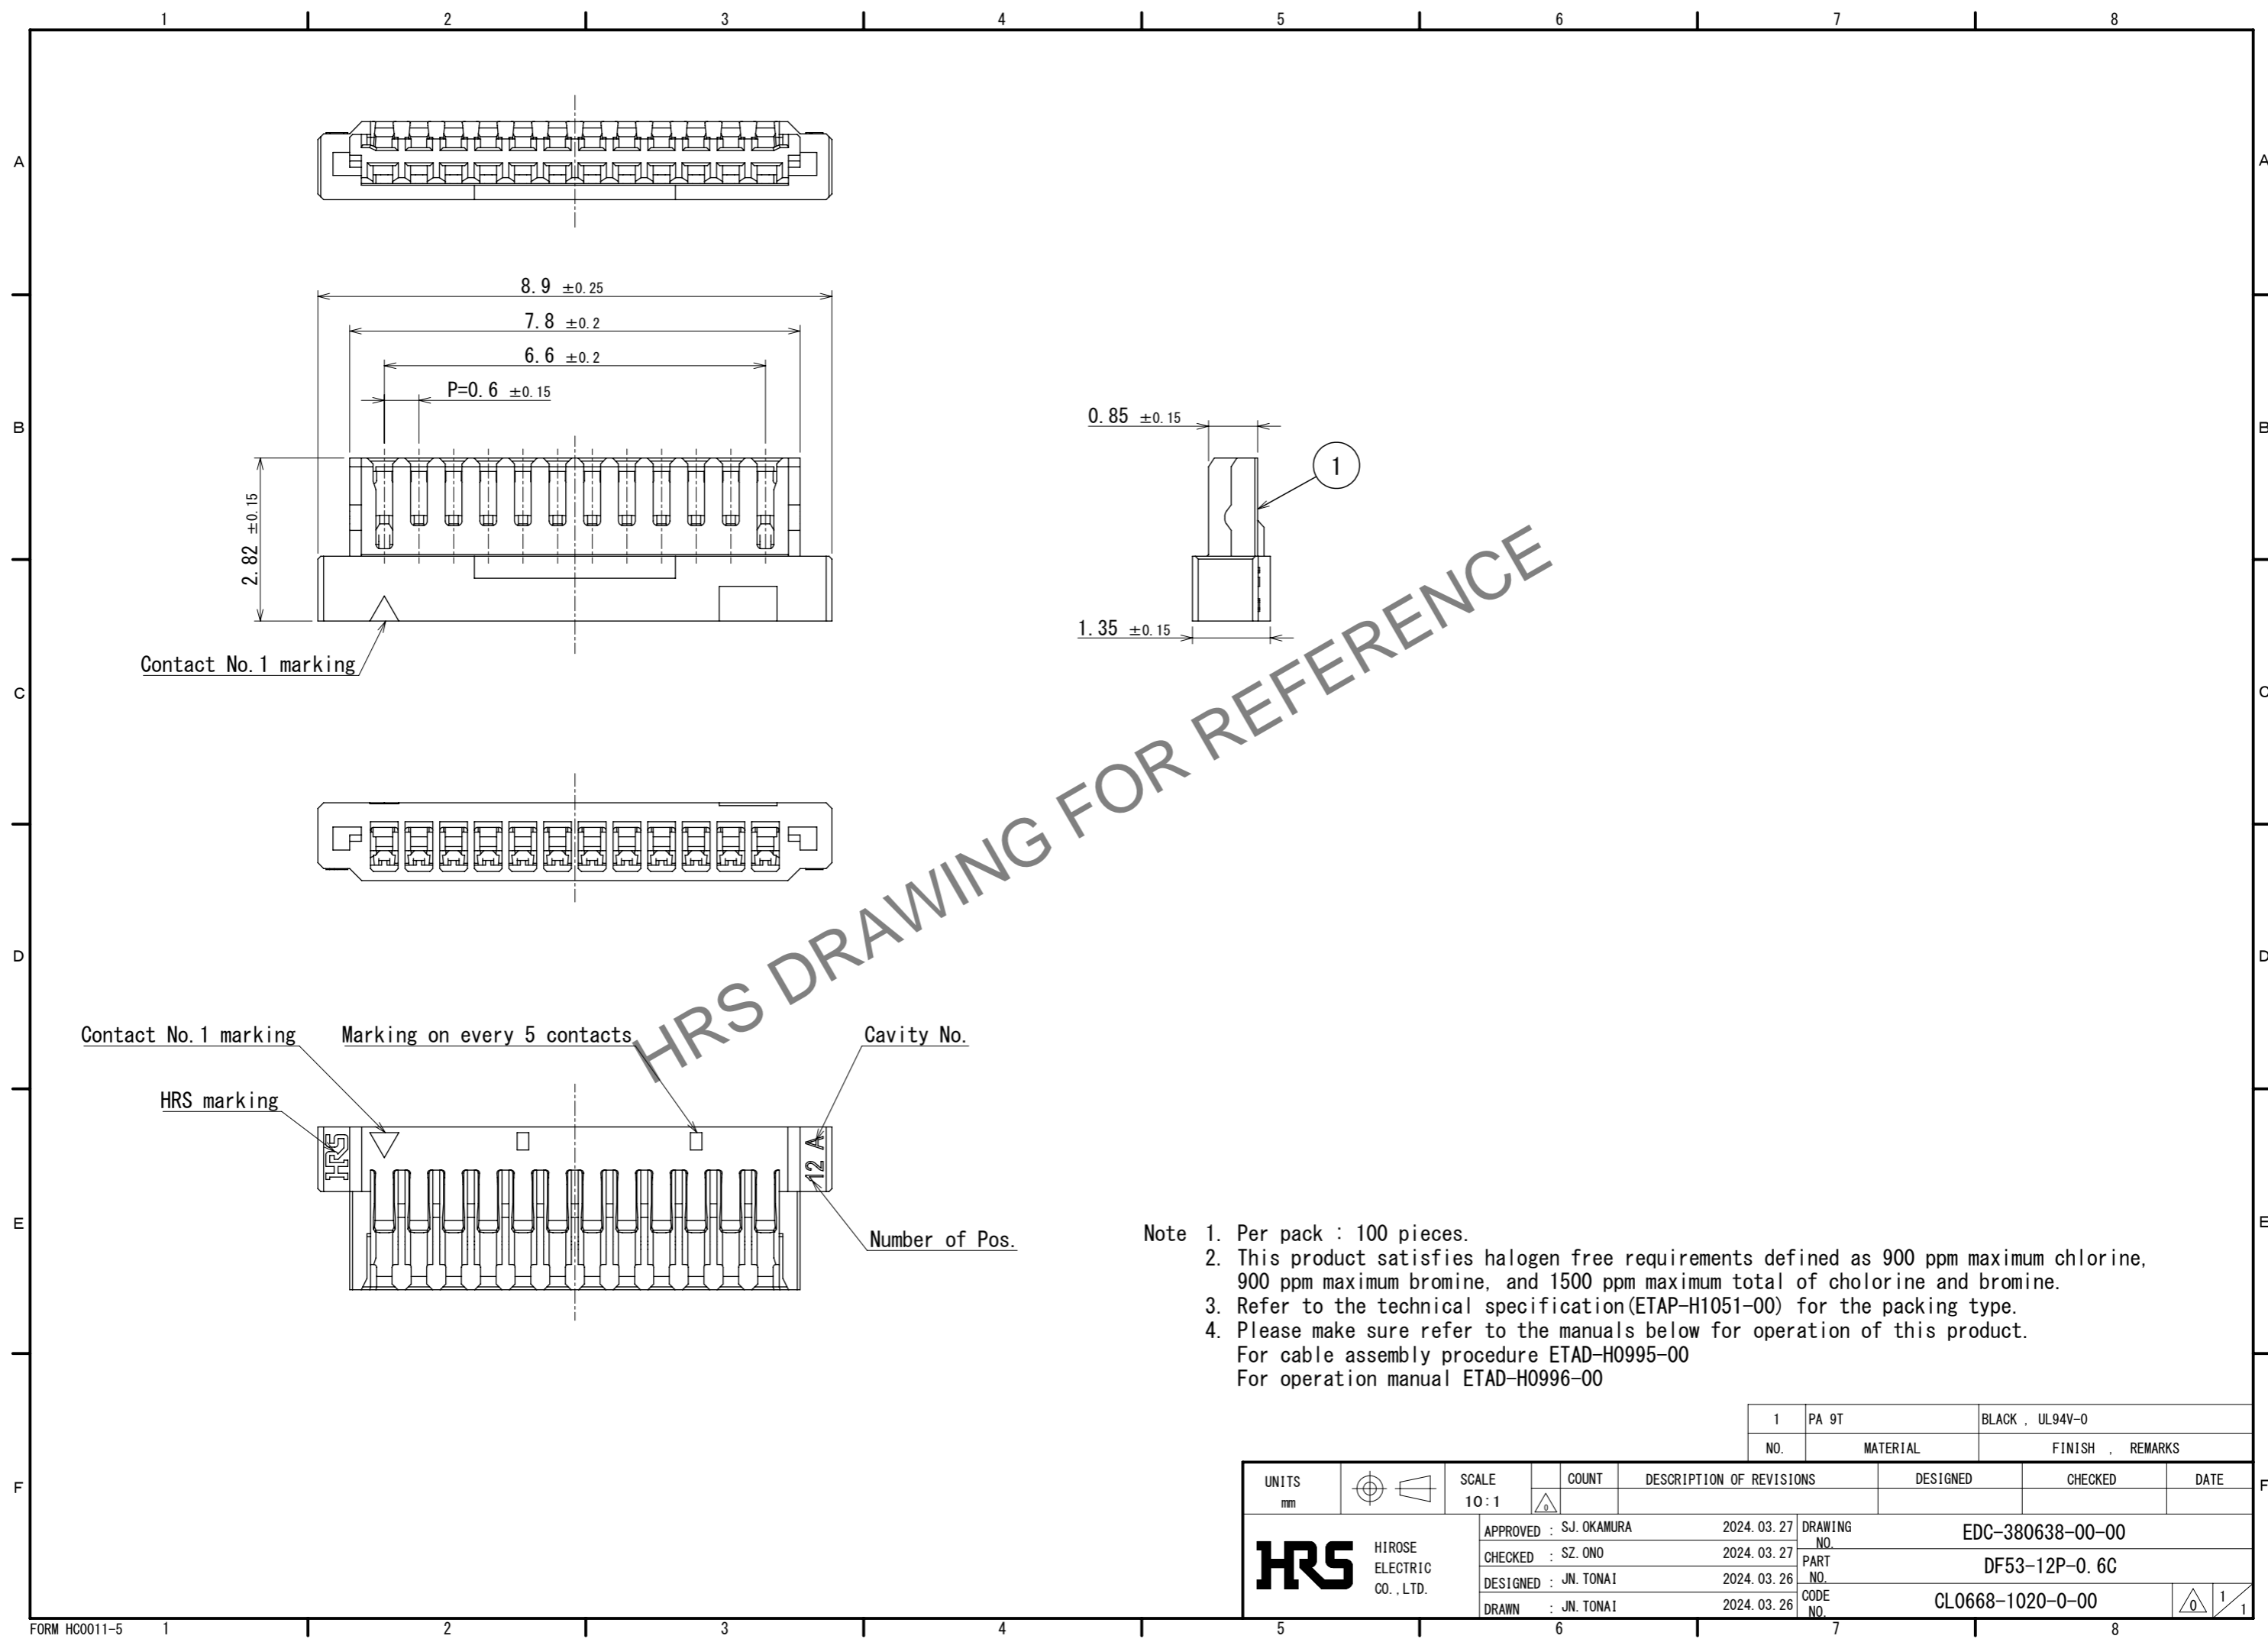

- Note
1. Per pack : 100 pieces.
 2. This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 ppm maximum bromine, and 1500 ppm maximum total of chlorine and bromine.
 3. Refer to the technical specification(ETAP-H1051-00) for the packing type.
 4. Please make sure refer to the manuals below for operation of this product.
 For cable assembly procedure ETAD-H0995-00
 For operation manual ETAD-H0996-00

1	PA 9T	BLACK , UL94V-0
NO.	MATERIAL	FINISH , REMARKS

UNITS mm 	SCALE 10:1 	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
			APPROVED : SJ. OKAMURA	2024. 03. 27	DRAWING NO. EDC-380638-00-00		
HIROSE ELECTRIC CO., LTD.			CHECKED : SZ. ONO	2024. 03. 27	PART NO. DF53-12P-0. 6C		
			DESIGNED : JN. TONAI	2024. 03. 26	CODE NO. CL0668-1020-0-00		
HRS			DRAWN : JN. TONAI	2024. 03. 26	1/1		