

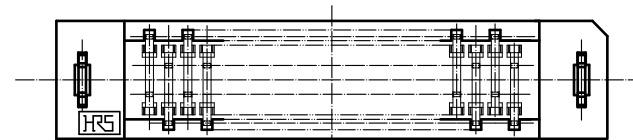
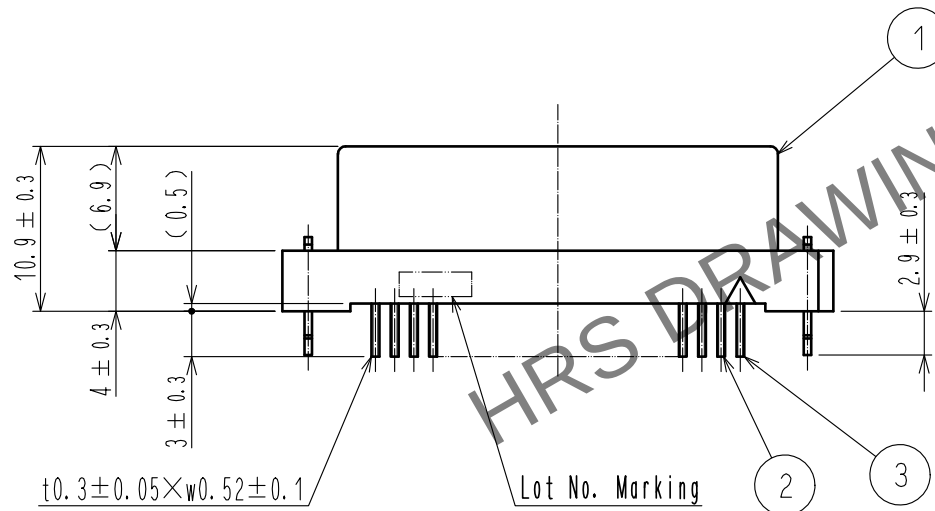
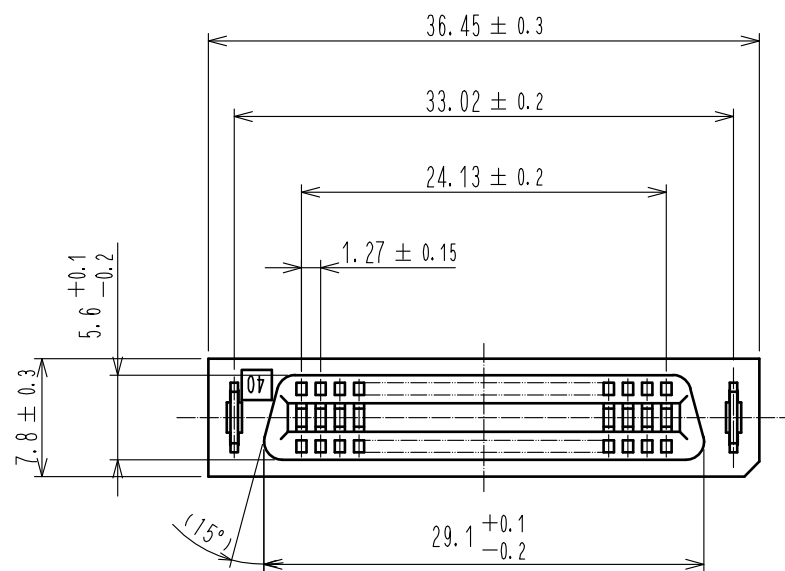


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

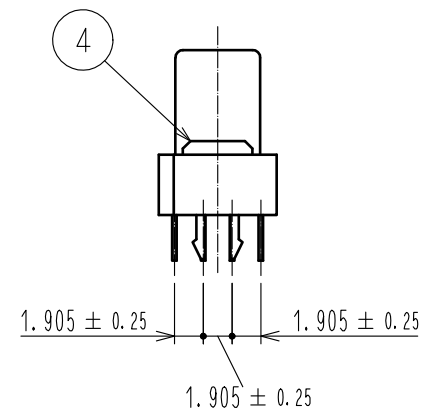

△ Recommended PC board hole pattern (mounting side)

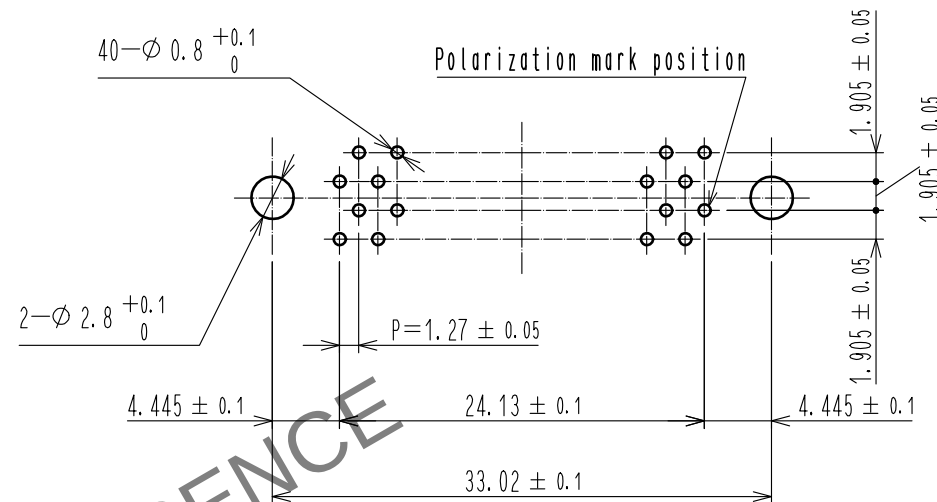

Notes 1 The dimensions in parentheses are for reference.

2	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min.	4	PHOSPHOR BRONZE	Tin-Plating
		Dip area : TIN-Plating 2μm min.	3	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min.
		Under plating : Nickel 2.5μm min.			Dip area : TIN-Plating 2μm min.
1	PBT	BLACK UL94V-0			Under plating : Nickel 2.5μm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00003693	
HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	18.06.25	DESIGNED NO.	EDC-021500-71-21
		CHECKED : HT. YAMAGUCHI	18.06.25	PART NO.	HIF7-40DA-1.27DSAL(71)
		DESIGNED : TY. EDAGAWA	18.06.25	CODE NO.	CL670-0151-6-71
		DRAWN : MK. OKI	18.06.21		
		DESIGNED	TM. NAKAJIMA	CHECKED	HT. YAMAGUCHI
		DATE	18.09.11		