

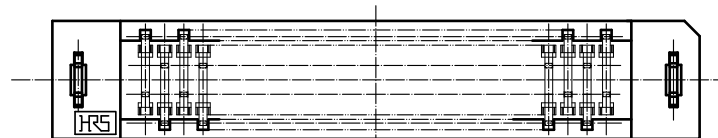
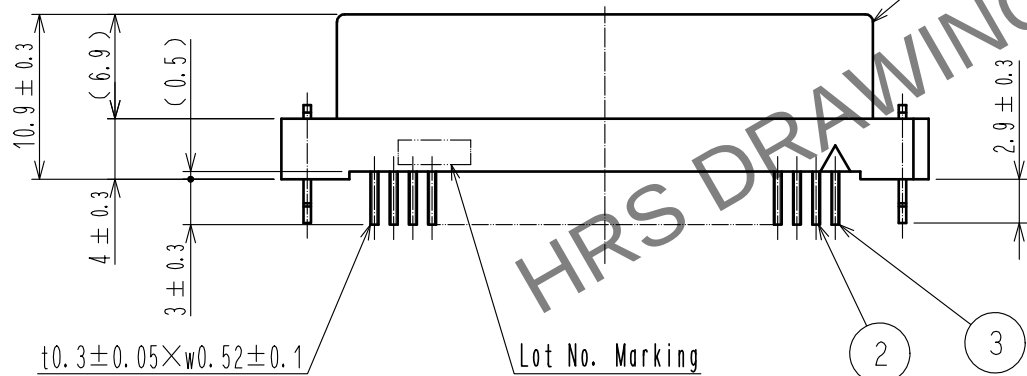
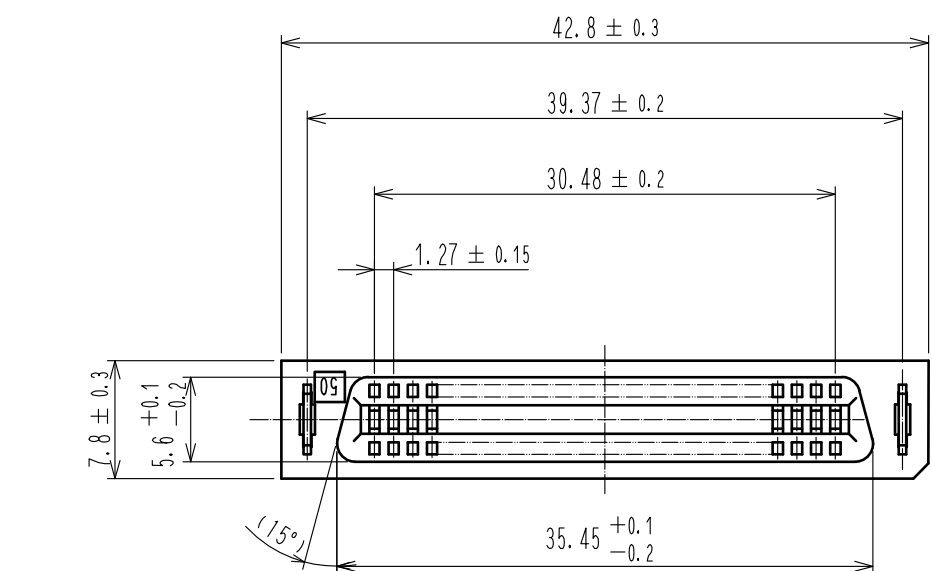


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

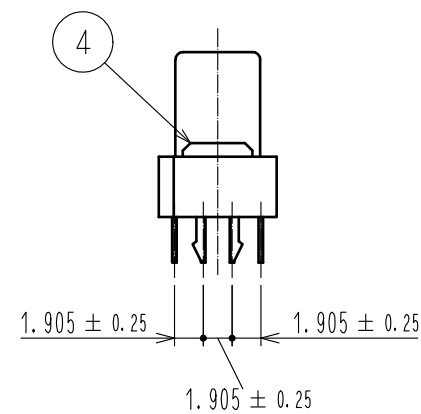

△ Recommended PC board hole pattern (mounting side)

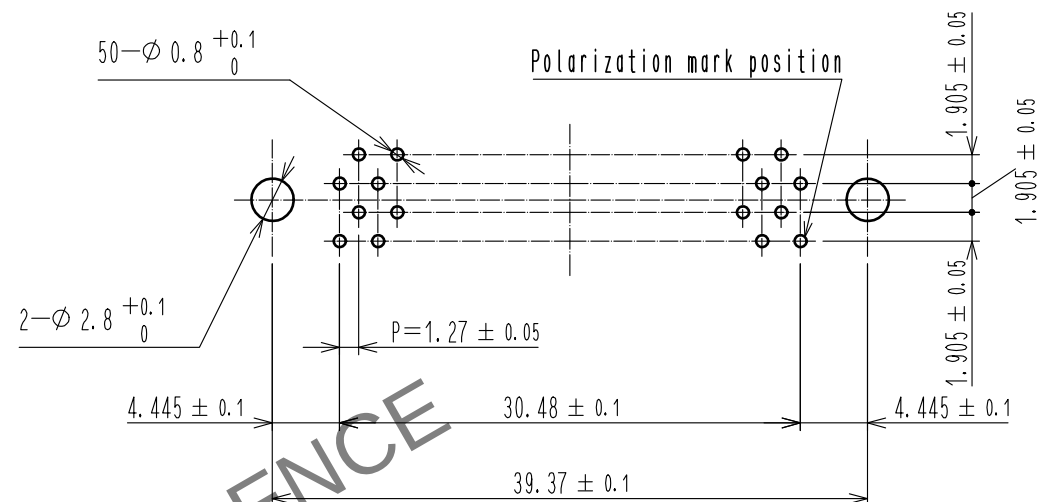

Notes 1 The dimensions in parentheses are for reference.

2	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min.	4	PHOSPHOR BRONZE	Tin-Plating
		Dip area : TIN-Plating 2μm min.	3	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min.
		Under plating : Nickel 2.5μm min.			Dip area : TIN-Plating 2μm min.
1	PBT	BLACK UL94V-0			Under plating : Nickel 2.5μm min.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	18.06.25	DESIGNED	TM. NAKAJIMA
		CHECKED : HT. YAMAGUCHI	18.06.25	CHECKED	HT. YAMAGUCHI
		DESIGNED : TY. EDAGAWA	18.06.25	DATE	18.09.11
		DRAWN : MK. OKI	18.06.21		
		DRAWING NO. EDC-021501-71-21			
		PART NO. HIF7-50DA-1.27DSAL(71)			
		CODE NO. CL670-0152-9-71			