

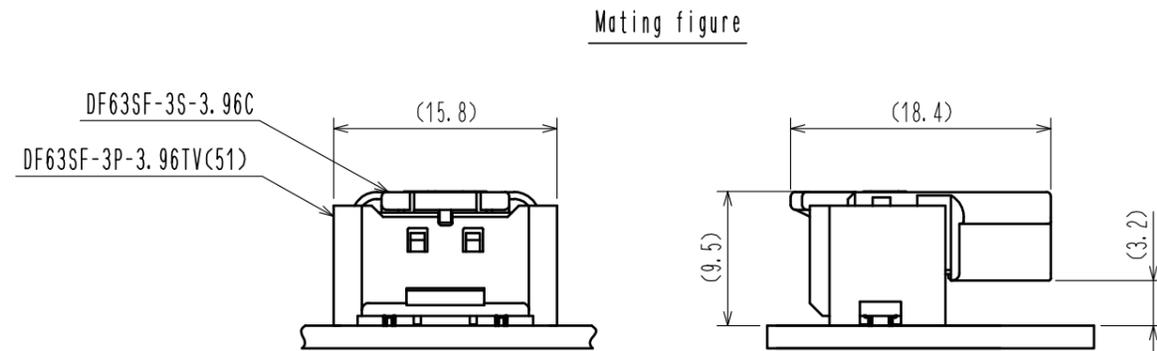
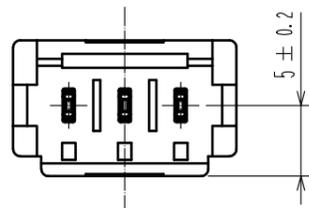
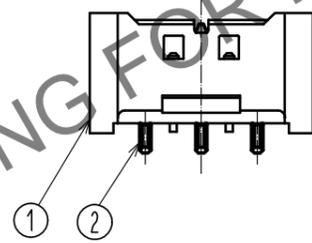
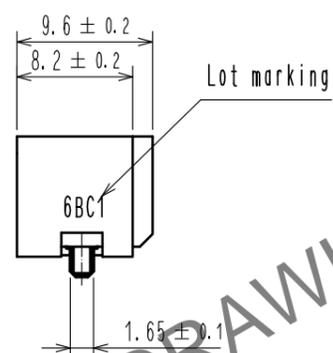
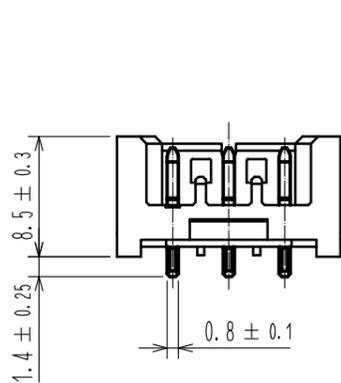


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

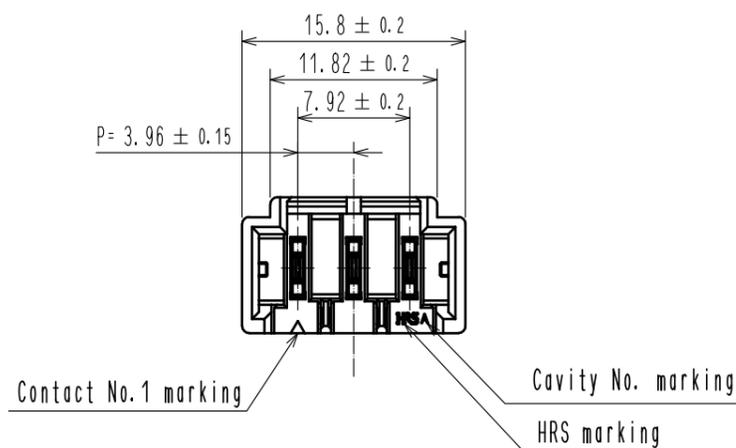

Recommended Pattern
Recommended Board Thickness (t=1.6mm)

Recommended metal mask
(Thickness : 0.15mm)

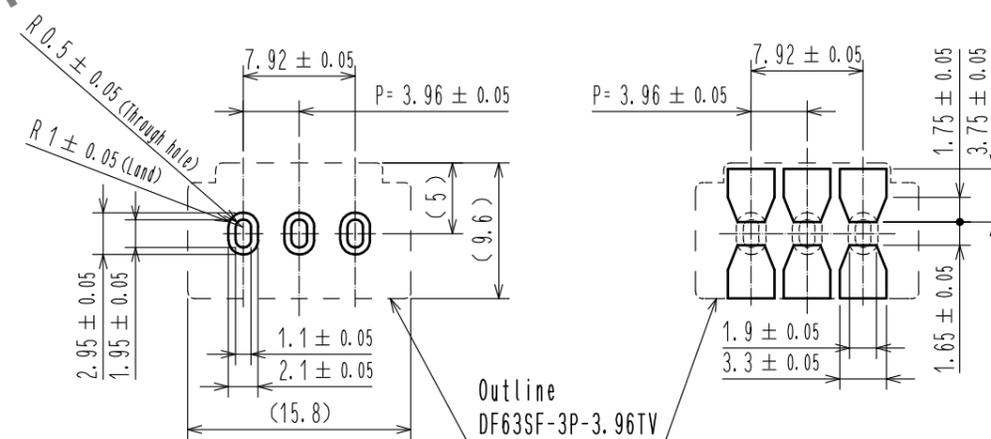

HRS DRAWING FOR REFERENCE


- Note 1. 1 reel : 450 connectors
 2. The dimensions in parentheses are for reference.
 3. Reel to JIS C 0806.(Packaging of components for automatic handling)
 4. The dimensions are Vacuum area
 5. UL(File No. E52653)
 C-UL(File No. E52653)
 TÜV (Certificate No. R50372836)
 authorization article.



3	PA	UL94V-0(BLACK)	6	PS	Reel . Black
2	Copper alloy	Contact area : Gold plating 0.2 μm MIN	5	Polyester	Clear [Cover tape]
		Contact end : Gold plating 0.05 μm MIN	4	PS	Clear [Embossed carrier tape]
		Lead area : Gold plating 0.05 μm MIN Under plating : Nickel plating 1.27 μm MIN			
1	LCP	UL94V-0(BLACK)			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00006075	DESIGNED TS.MIYAKI	CHECKED SZ.ONO	DATE 20200710
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 20191112	DRAWING NO. EDC-367034-51-00				
		CHECKED : SZ. ONO 20191112	PART NO. DF63SF-3P-3.96TV(51)				
		DESIGNED : TO. KUROMATSU 20191112	CODE NO. CL680-0701-0-51				
		DRAWN : SK. CHIBA 20191112					

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

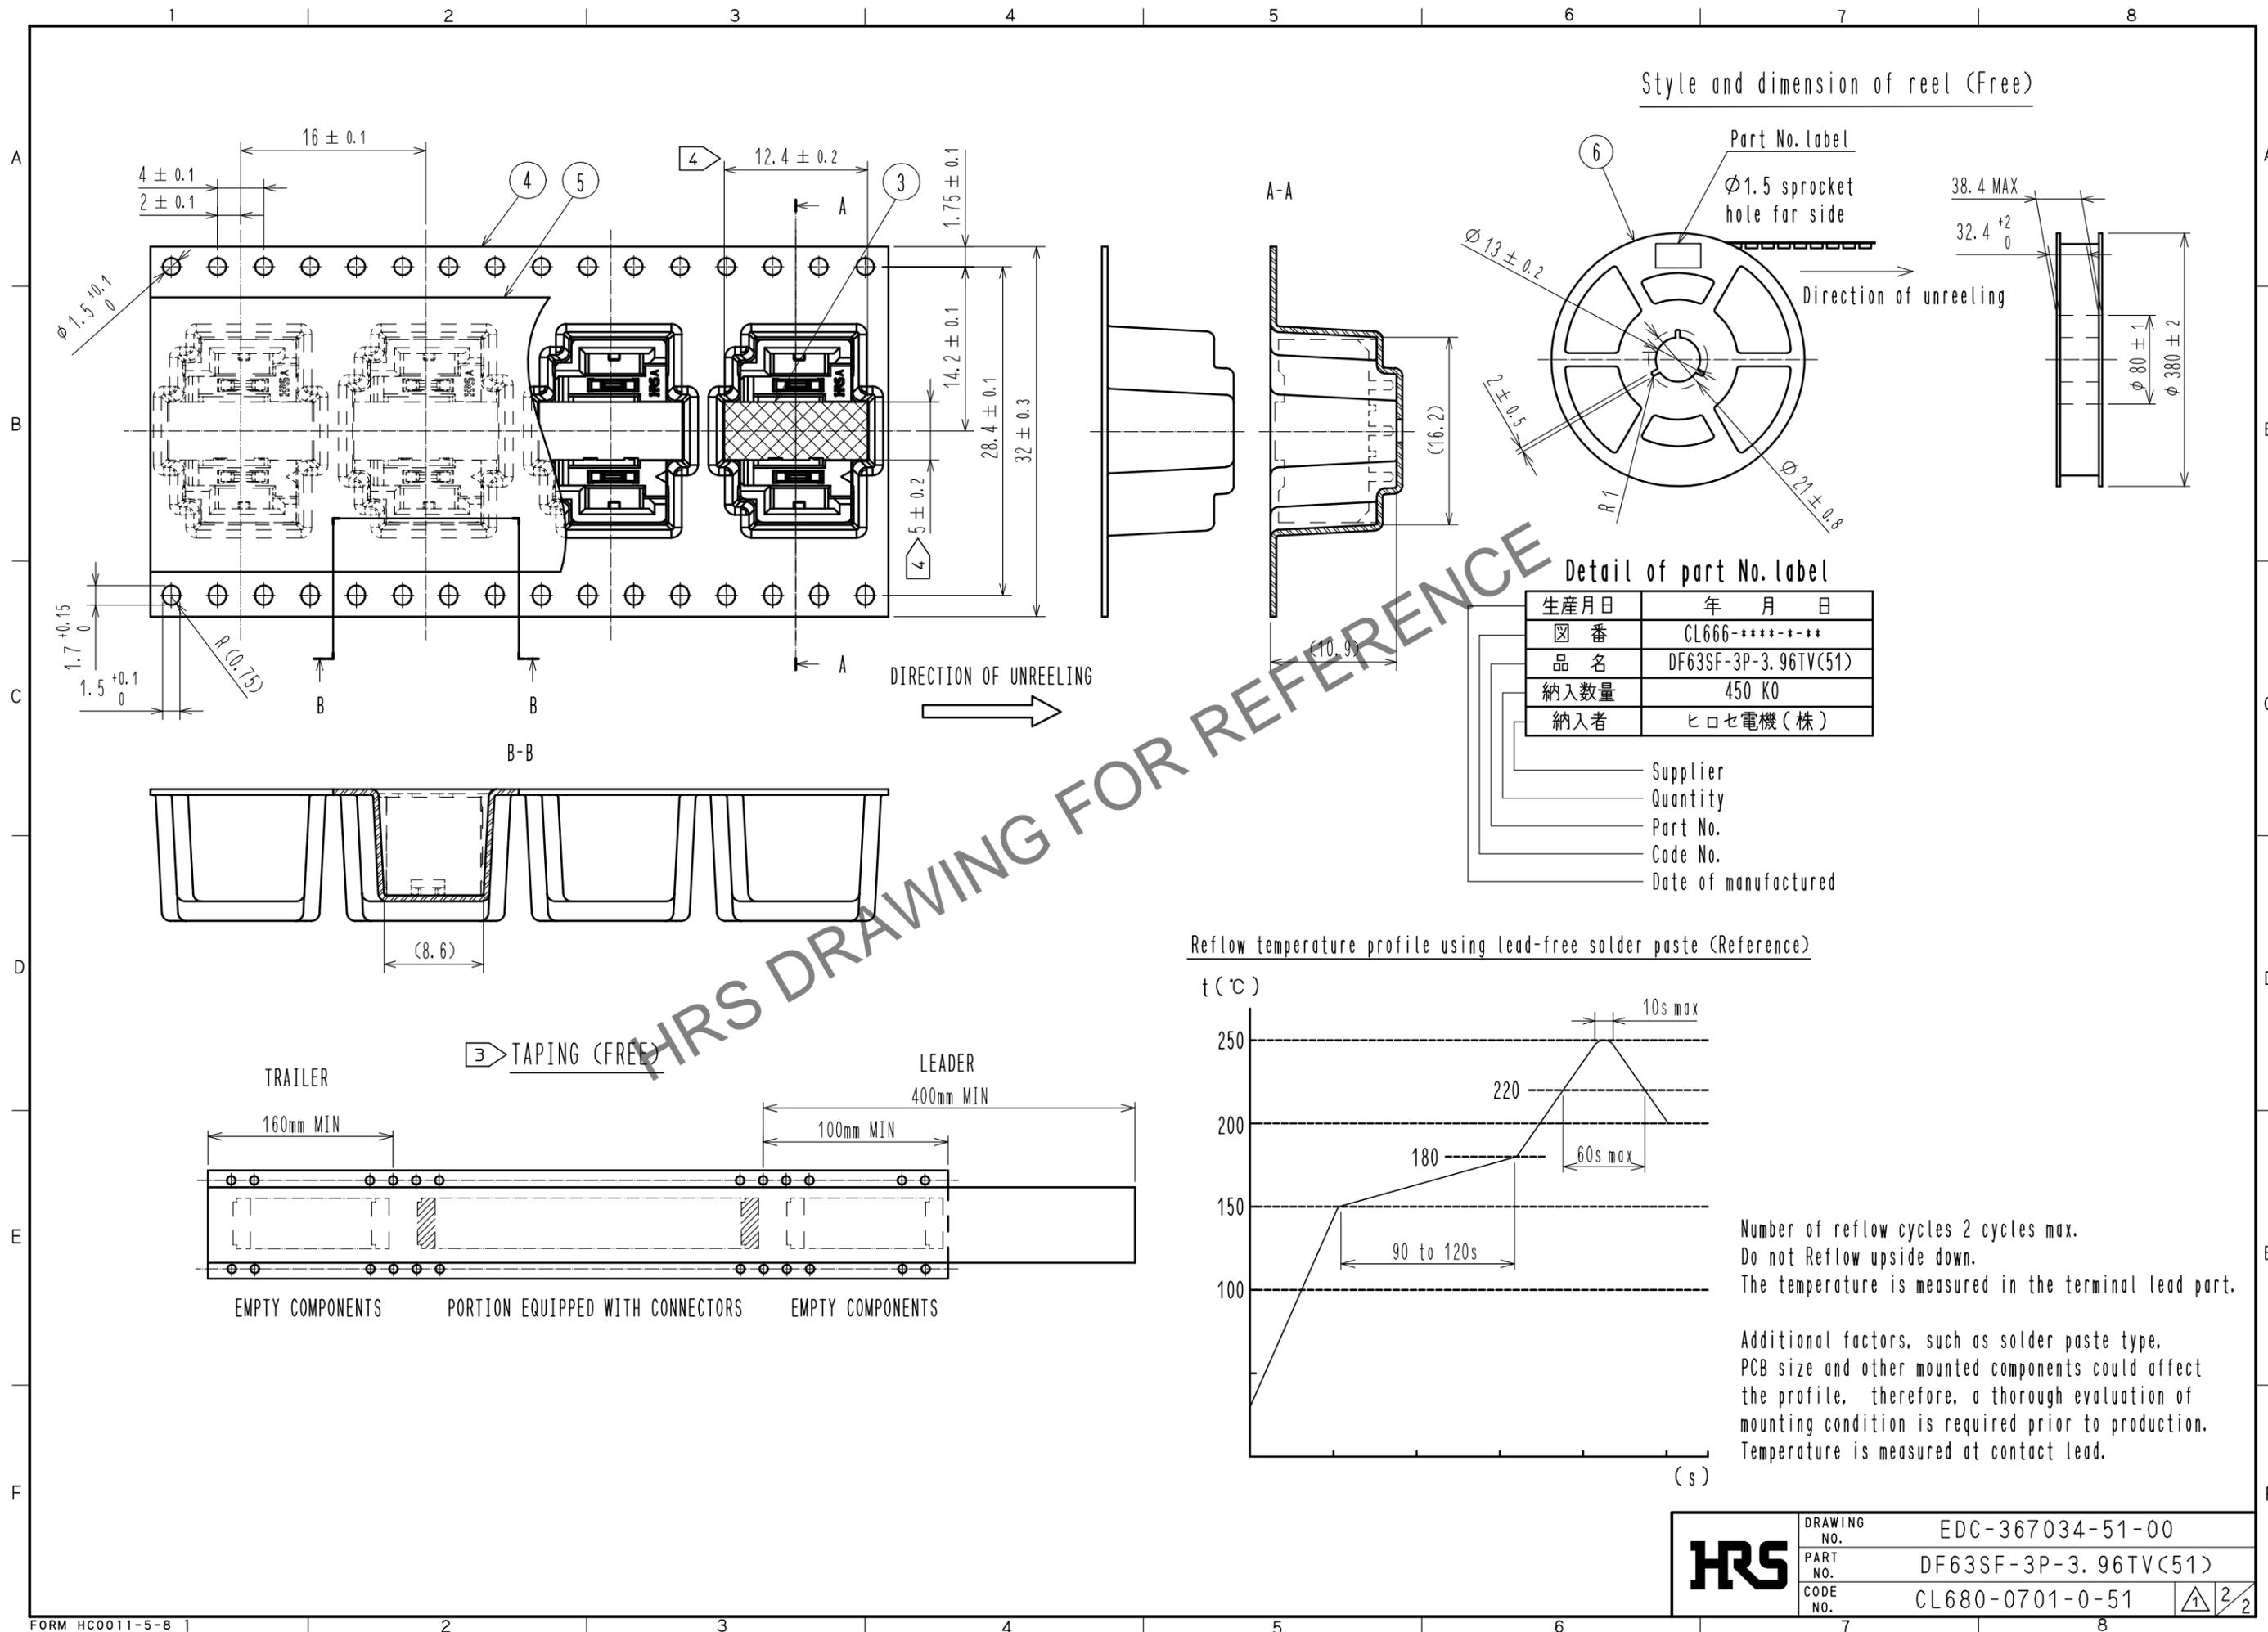

HRS	DRAWING NO.	EDC-367034-51-00
	PART NO.	DF63SF-3P-3.96TV(51)
	CODE NO.	CL680-0701-0-51
		2/2