

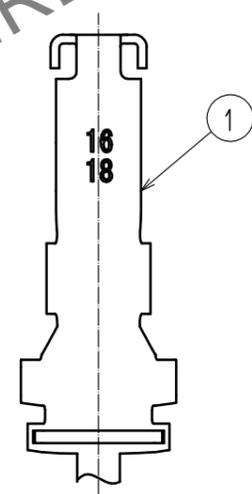
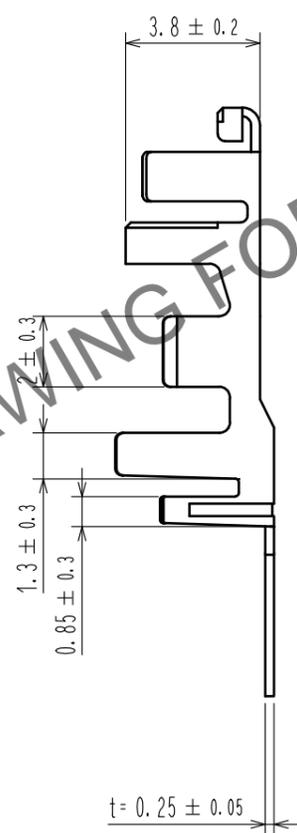


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

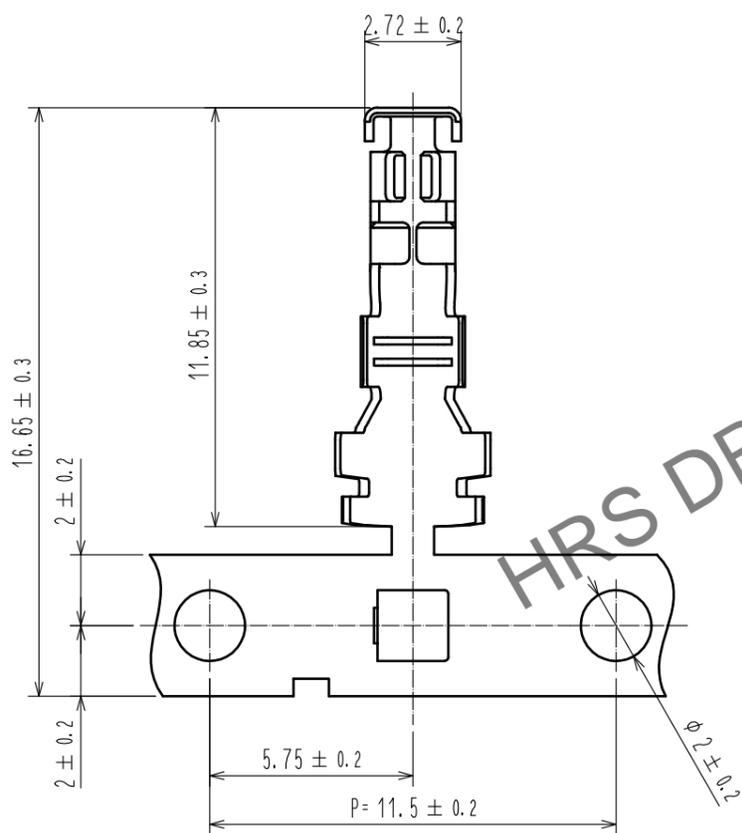

② Style and dimensions of reel

Part No. label

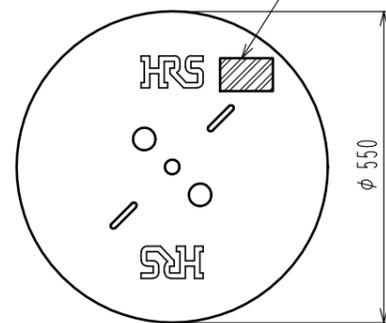

Detail of part No. label

HRS		検査
品名コード	CL680-0703-0-00	Inspection
品名	DF63SF-1618SCFA	
数量	3000	
仕様		
LOT No.		
継ぎ目		
Section		
Lot No.		
Specification		
Quantity		
Part No.		
Code No.		

HRS DRAWING FOR REFERENCE

Note. 1. 3,000 contacts per reel. ⚠

② Style of reel are shown in figure.

3. Please be to check the form of crimping using a cable, when you adjust applicator. .

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
		1		Copper alloy				Contact area : Gold plating 0.2μm MIN Under plating : Nickel plating 1.27μm MIN			
UNITS	mm	SCALE	5 : 1	COUNT	1	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
						DIS-H-00002553	SANGMUK. LIM	YN. TAKASHITA	17. 01. 31		
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		16. 11. 25		DRAWING NO.		EDC-367036-00-00			
		CHECKED : YN. TAKASHITA		16. 11. 25		PART NO.		DF63SF-1618SCFA			
		DESIGNED : SANGMUK. LIM		16. 11. 25		CODE NO.		CL680-0703-0-00			
		DRAWN : SANGMUK. LIM		16. 11. 25							