

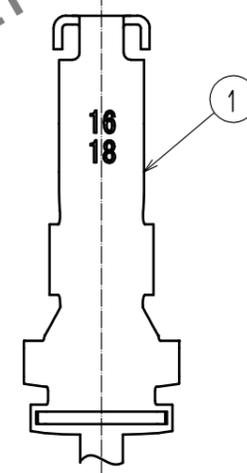
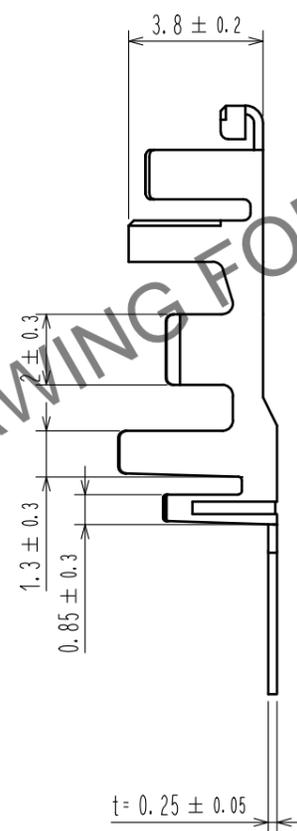


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

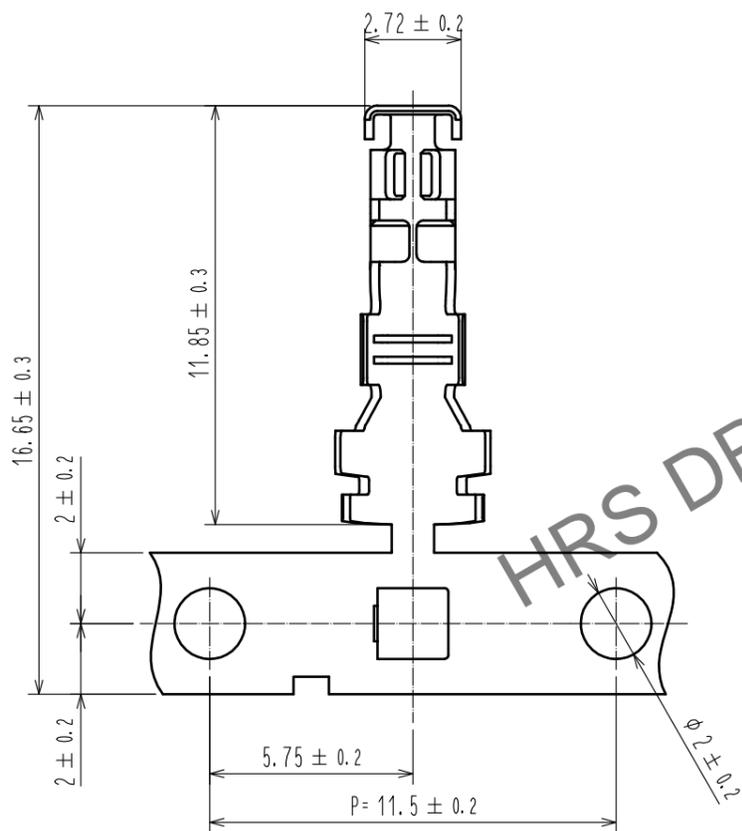

② Style and dimensions of reel

Part No. label

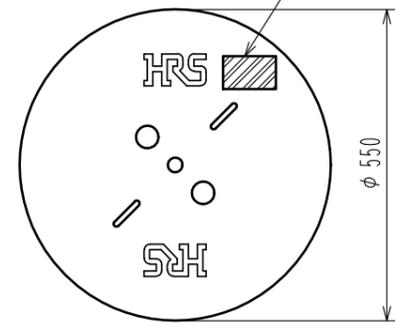

Detail of part No. label

HRS		検査
品名コード	CL680-0703-0-05	Inspection
品名	DF63SF-1618SCFA(05)	
数量	3000	
仕様		
LOT No.		
継ぎ目		
Section		
Lot No.		
Specification		
Quantity		
Part No.		
Code No.		

HRS DRAWING FOR REFERENCE

Note. 1. 3,000 contacts per reel. ⚠

② Style of reel are shown in figure.

3. Please be to check the form of crimping using a cable, when you adjust applicator. .

NO. MATERIAL FINISH . REMARKS		NO. MATERIAL FINISH . REMARKS	
UNITS mm		Contact area : Gold plating 0.76μm MIN Under plating : Nickel plating 1.27μm MIN	
SCALE 5 : 1	COUNT 1	DESIGNED SANGMUK. LIM	CHECKED YN. TAKASHITA
DESCRIPTION OF REVISIONS DIS-H-00002518		DATE 17.01.19	
APPROVED : HS. OKAWA 16.12.09		DRAWING NO. EDC-367036-05-01	
CHECKED : YN. TAKASHITA 16.12.08		PART NO. DF63SF-1618SCFA(05)	
DESIGNED : SANGMUK. LIM 16.12.08		CODE NO. CL680-0703-0-05	
DRAWN : SANGMUK. LIM 16.12.08		1/1	