

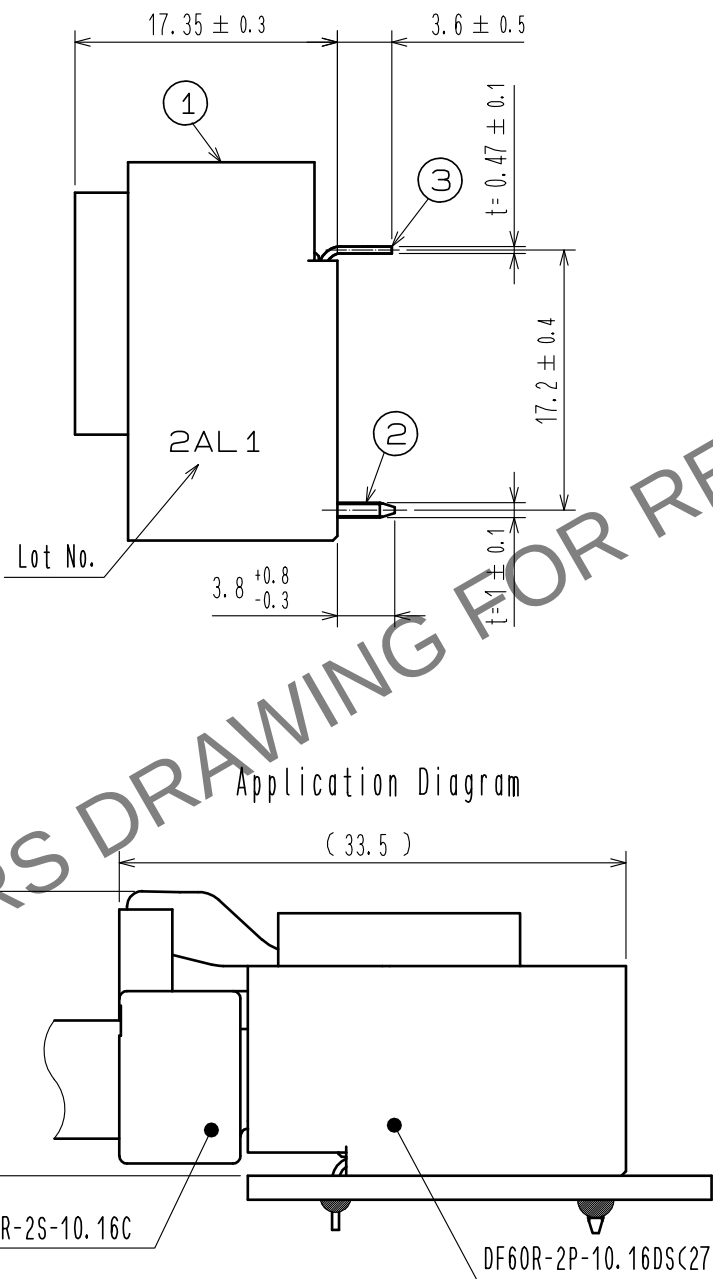
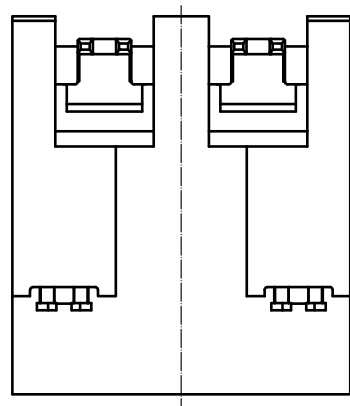
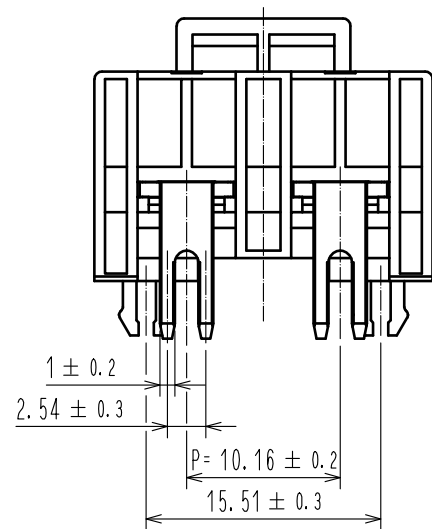
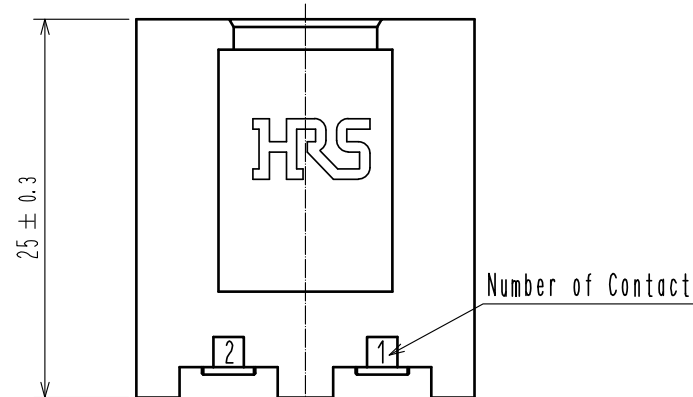




May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

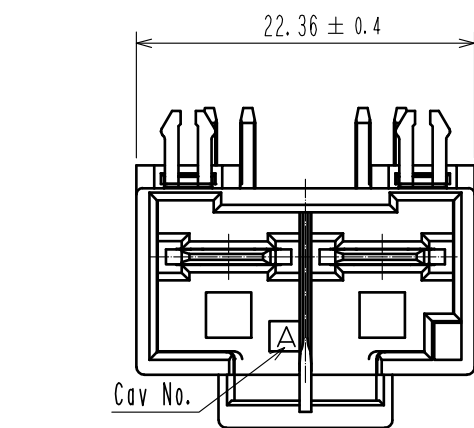

Recommended PCB Layout
(Board thickness : t=1.6±0.1mm)

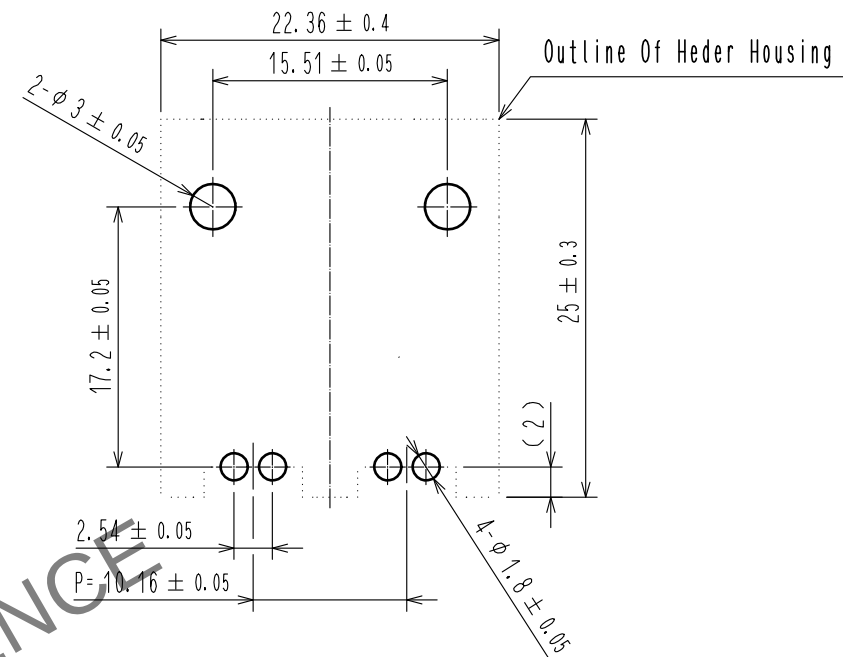

Packing Diagram(FREE)

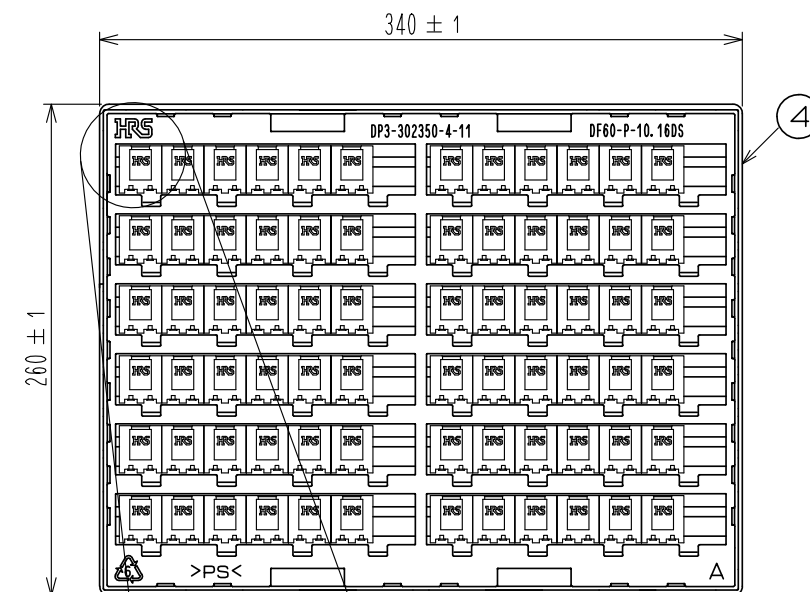

- Notes 1. Per tray : 72 Pieces.
2. UL(File No.E52653)
C-UL(File No.E52653)
TUV (Certificate No. R50244085) authorization article.



1	PBT	Gray, UL94-V0	4	PS	Clear
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
OVER	TO	TOLERANCE	UNITS	mm	SCALE
6	18	±0.3	mm	2	1
18	50	±0.5	mm	2	1
50	125	±0.7	mm	2	1
125	250	±1	mm	2	1
HRS			HIROSE ELECTRIC CO., LTD.		
組立図 ASSEMBLY DRAWING			DRAWING NO. EDC-345410-27-00		
APPROVED : KI. AKIYAMA			PART NO. DF60R-2P-10.16DS(27)		
CHECKED : TS. FUKUSHIMA			CODE NO. CL680-3043-7-27		
DESIGNED : TS. KUMAZAWA			DATE 15.06.02		
DRAWN : TS. KUMAZAWA			DATE 15.06.02		