
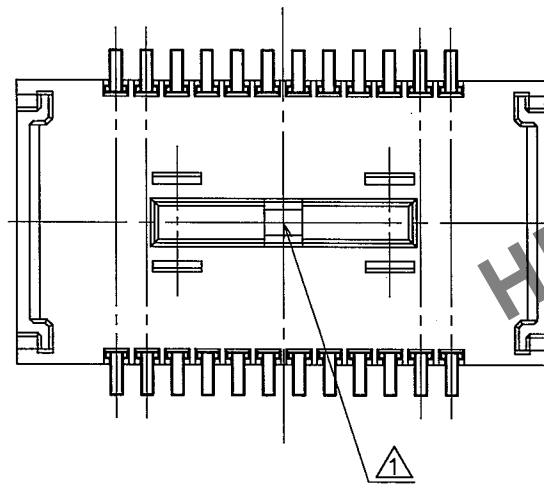
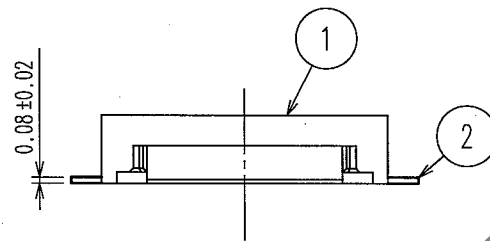
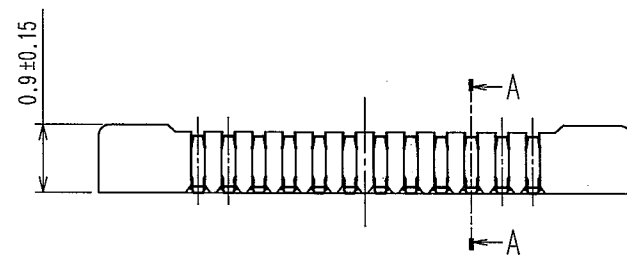



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

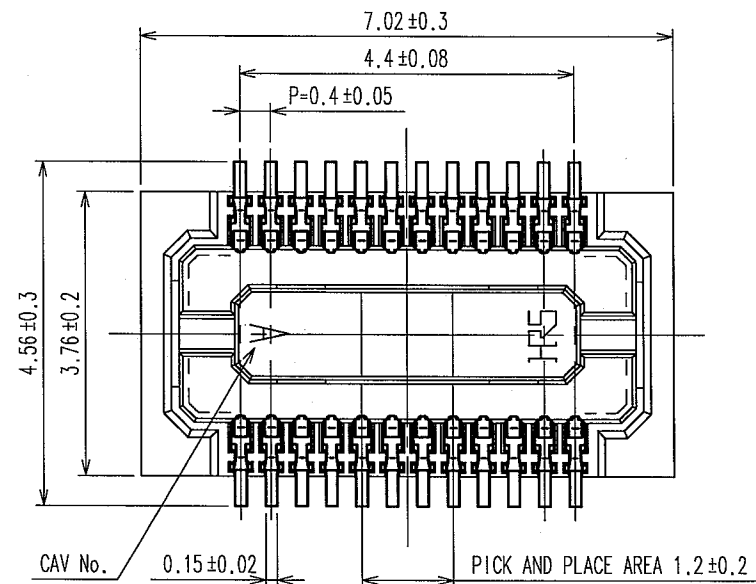

- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 5000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 MM AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 MM AT MIN SHALL BE EMPTY POCKETS.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05 μ m MIN.
SMT LEAD : GOLD 0.02 μ m MIN.
UNDERPLATING : NICKEL 1 μ m MIN.
(SURFACE : SEALING)


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-H-001096	A.A	T.M	66.06.29					

RECOMMENDED PATTERN

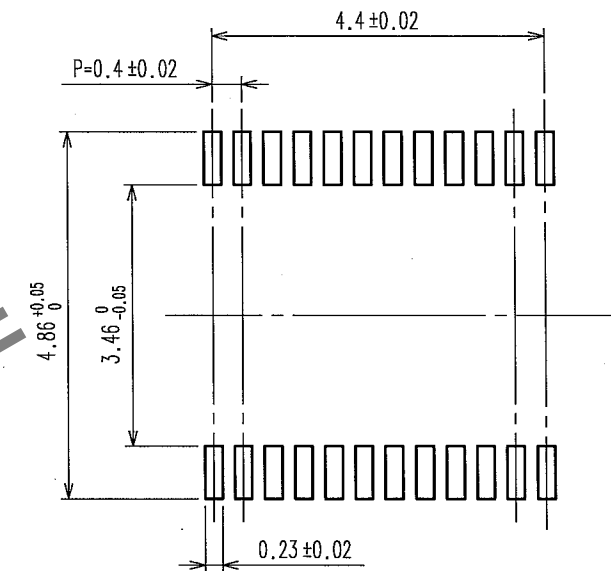

RECOMMENDED SOLDER PASTE: THICKNESS 120 μ m


A-A(20:1)

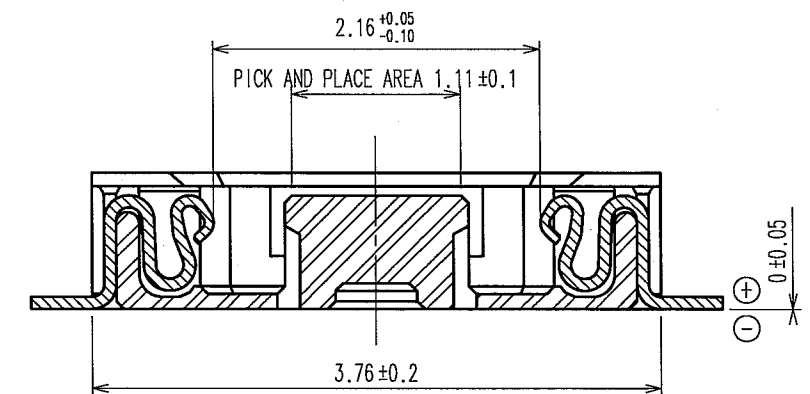

2	PHOSPHOR BRONZE	4	5	PS	PLASTIC REEL (BLACK)
1	LCP	UL94V-0, BLACK	4	POLYESTER	CLEAR (CAVER TAPE)
			3	PS	CLEAR (EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		F. Matsuki	A. TAKAHASHI	T. SAKATA	T. SAKATA
		'04. 12. 22	'04. 12. 22	'04. 12. 22	'04. 12. 22
DRAWING NO.		PART NO.			
EDC3-303463-04		DF30FC-24DS-0.4V(81)			
SCALE		CODE NO.			
10 : 1		CL684-1111-0-81			
UNITS					
mm					

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

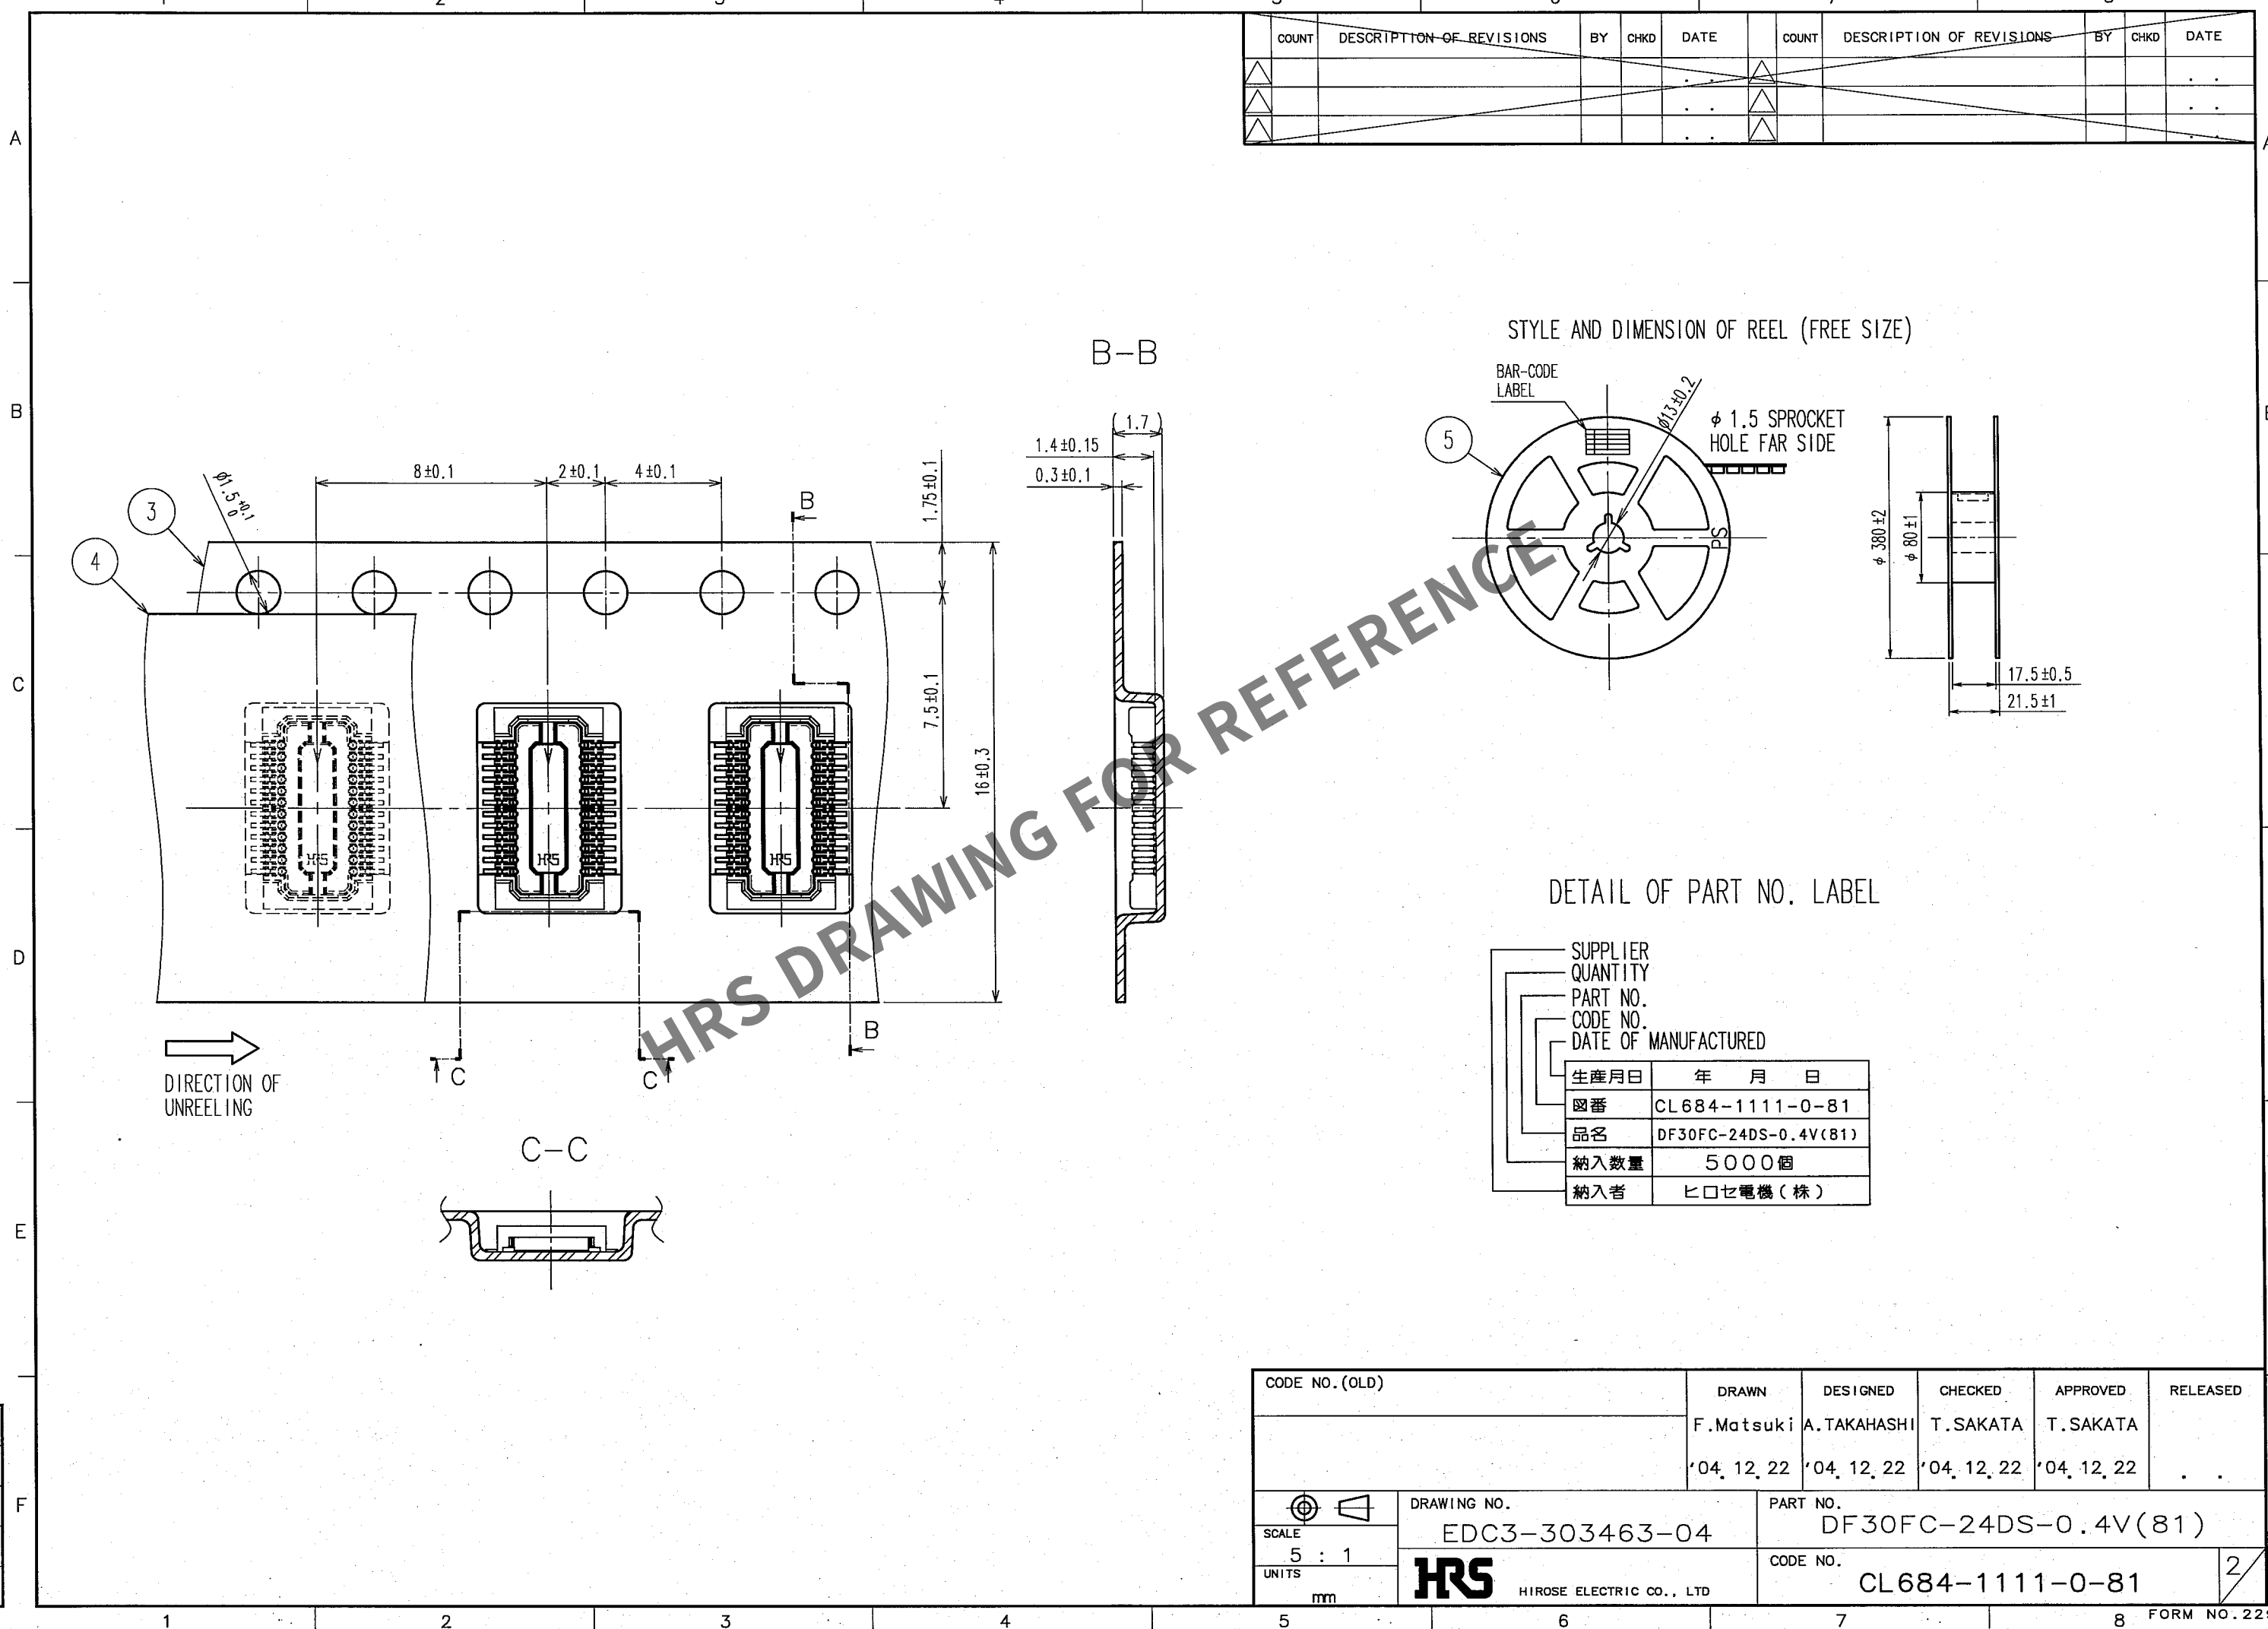

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		F. Matsuki	A. TAKAHASHI	T. SAKATA	T. SAKATA	
		'04. 12. 22	'04. 12. 22	'04. 12. 22	'04. 12. 22	
SCALE	DRAWING NO.	PART NO.				
5 : 1	EDC3-303463-04	DF30FC-24DS-0.4V(81)				
UNITS	HRS	CODE NO.				
mm	HIROSE ELECTRIC CO., LTD	CL684-1111-0-81				