


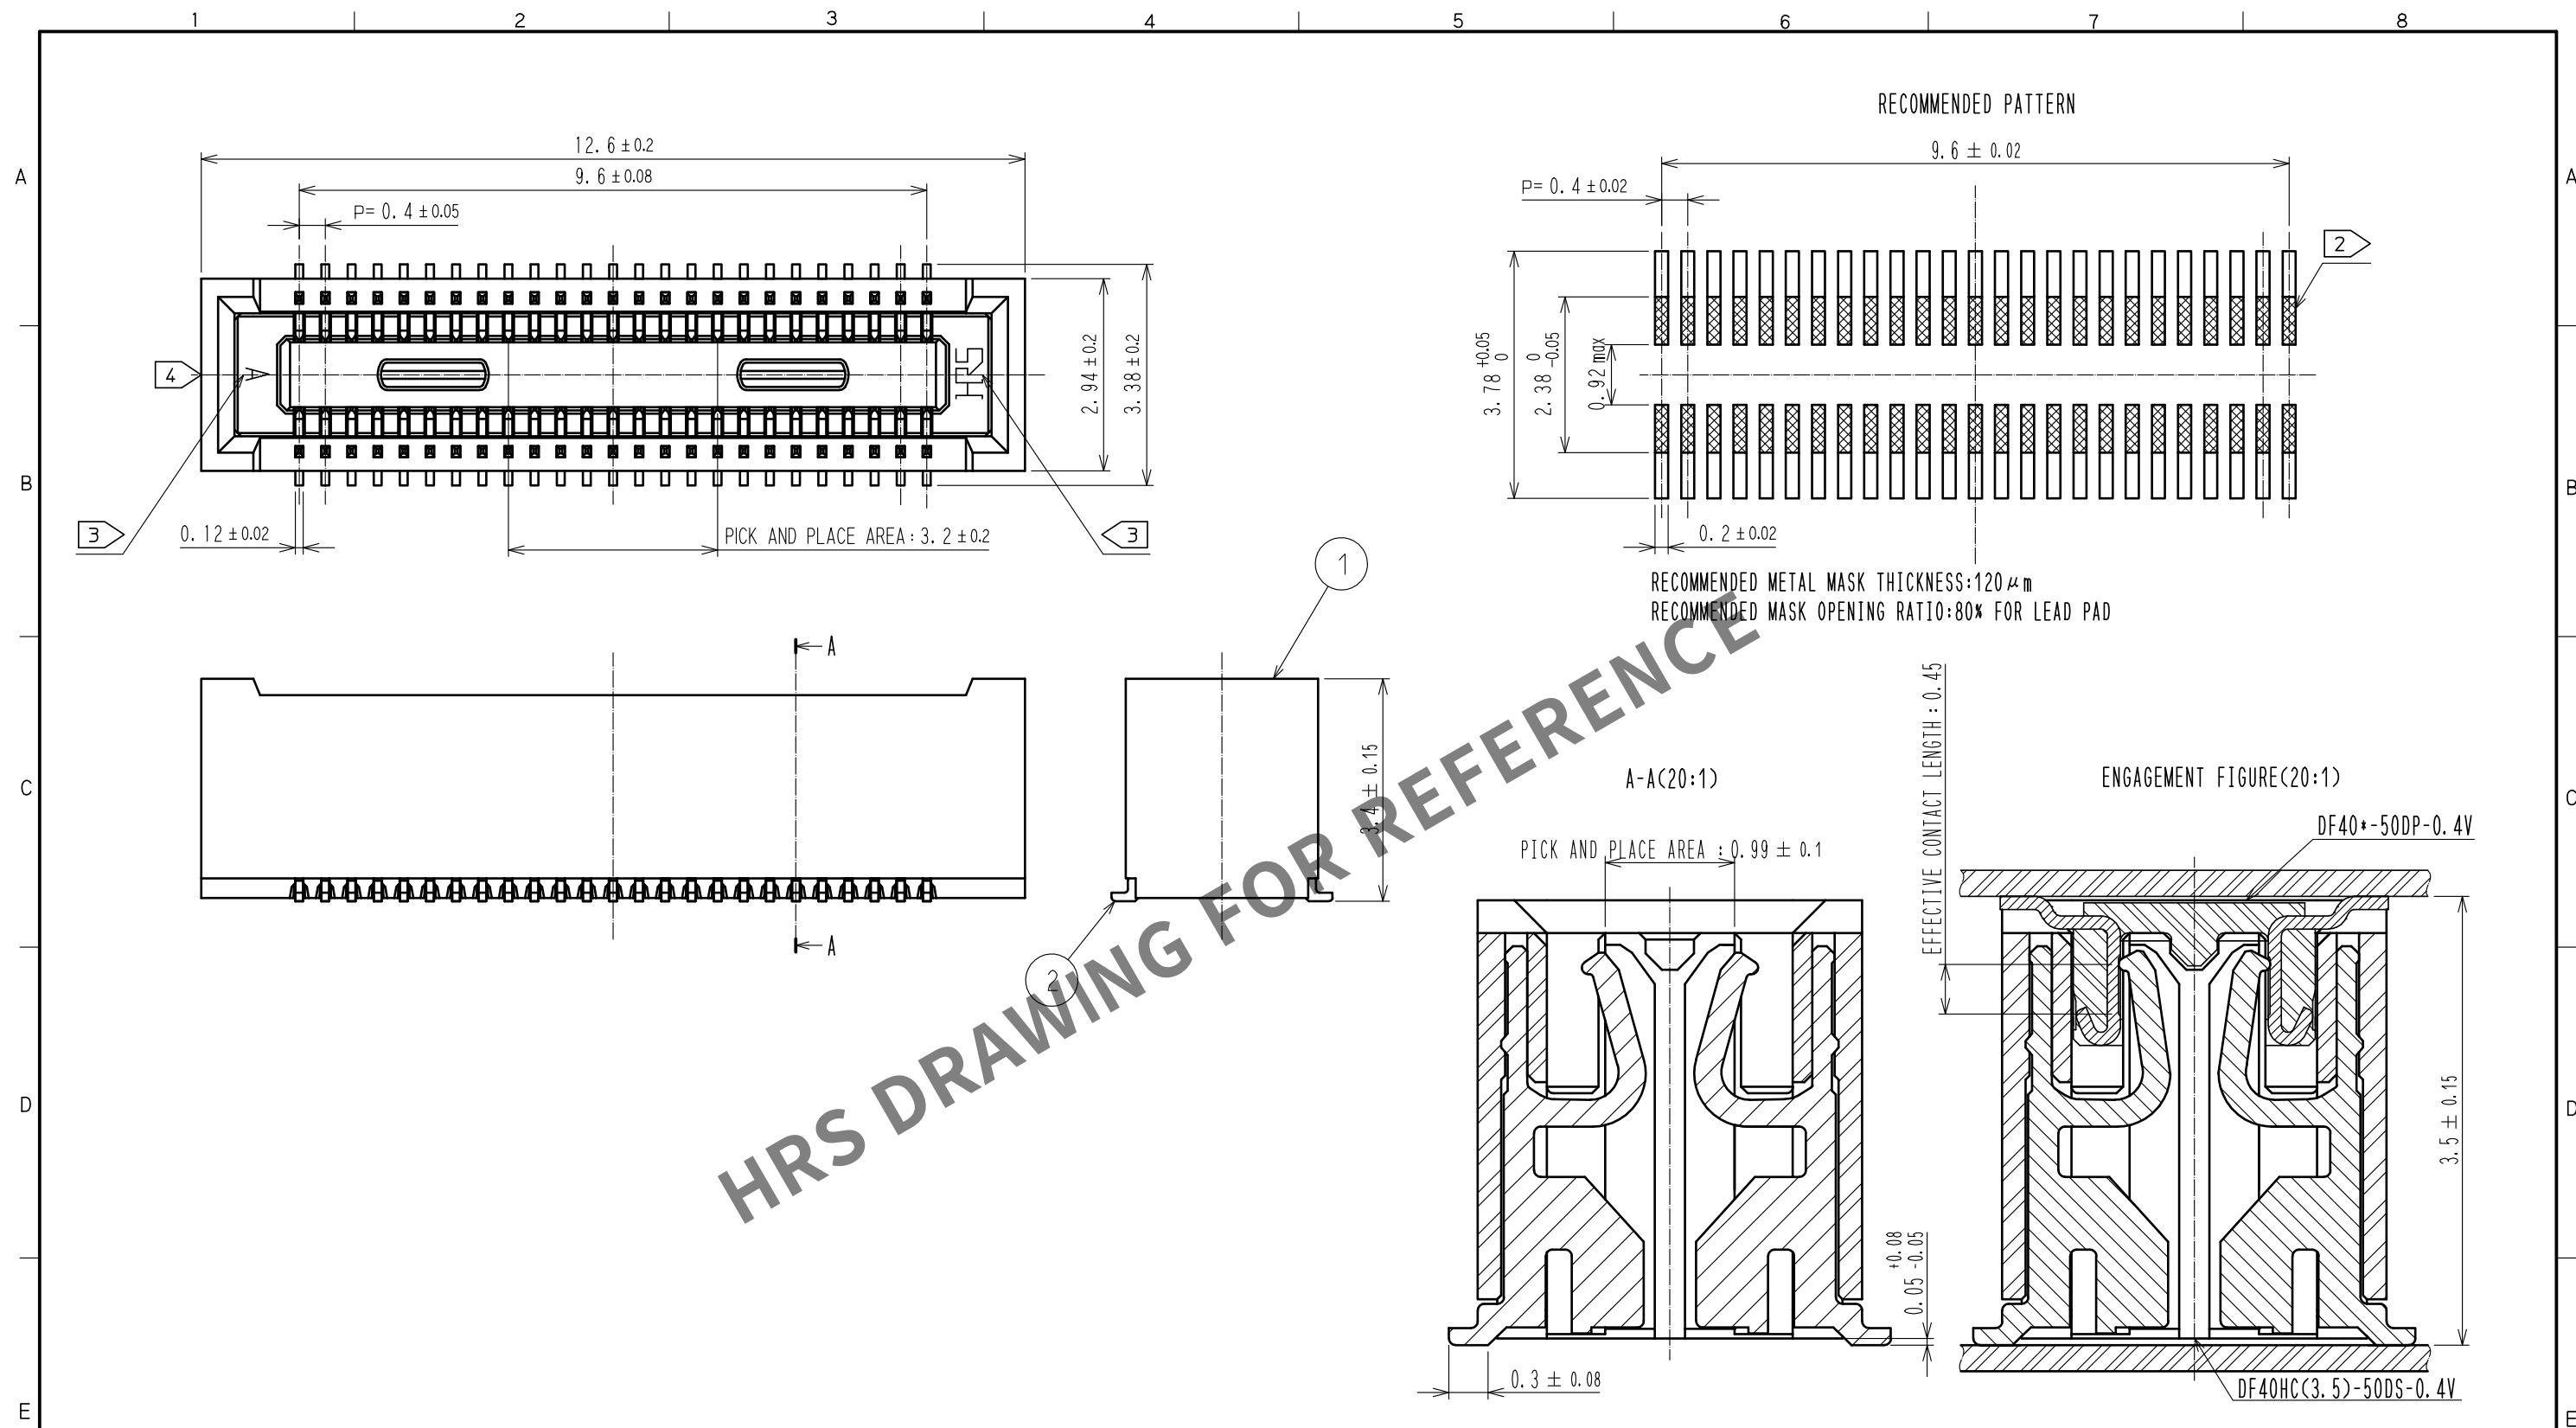

NOTES) 1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
2.  IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3. HRS MARK AND CAV NO. IS INDICATED IN APPROXIMAL POSITION SHOWN.
4. GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		10 : 1	1	DIS-H-00009450	RH. KAGAMI	YK. SATAKE	20210527

 HIROSE ELECTRIC CO., LTD.	APPROVED	TS. MIYAZAKI	20200309	DRAWING NO.	EDC-318981-58-00	
	CHECKED	TS. MIYAZAKI	20200309	PART NO.	DF40HC(3.5)-50DS-0.4V(58)	
	DESIGNED	RH. KAGAMI	20200309			
	DRAWN	RH. KAGAMI	20200309	CODE NO.	CL0684-4109-4-58	  

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

