
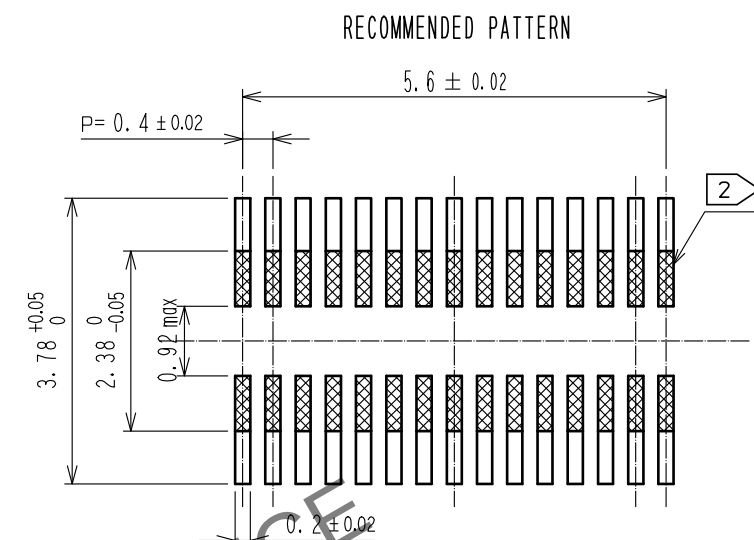
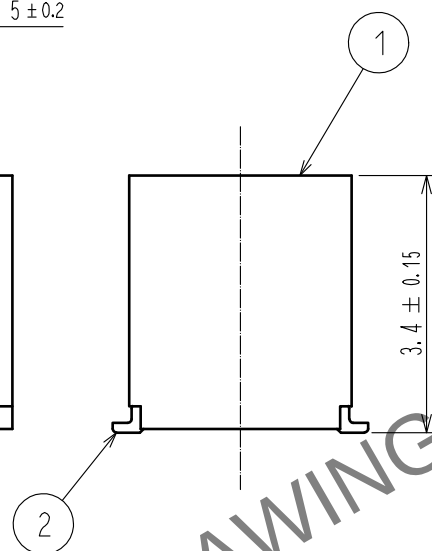
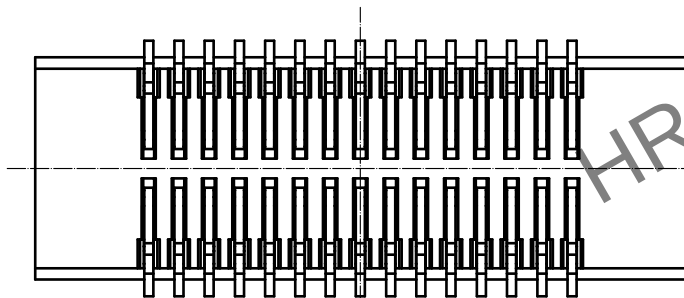
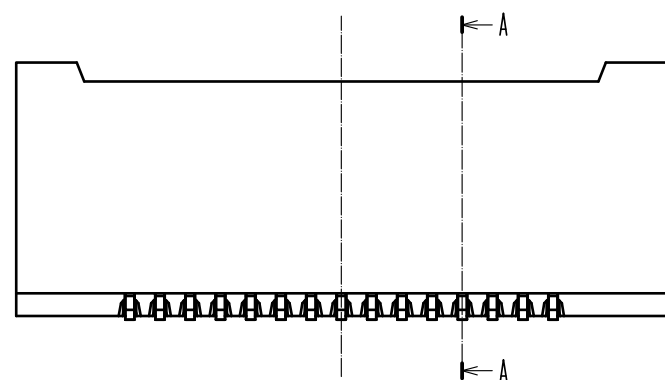




Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

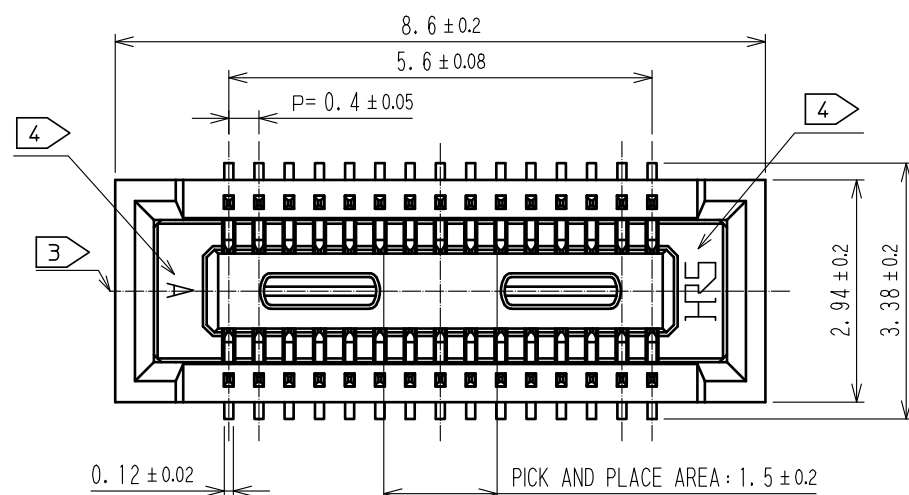

RECOMMENDED METAL MASK THICKNESS : $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD


A-A(20:1)

ENGAGEMENT FIGURE (20:1)

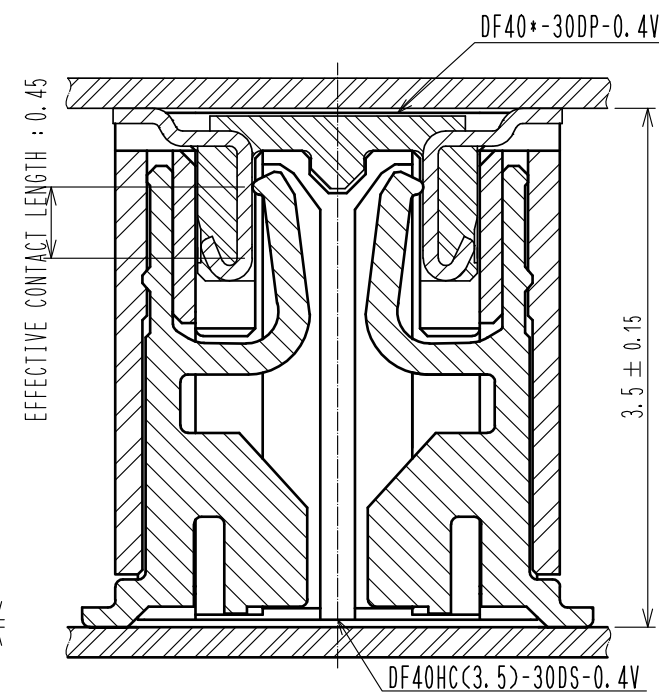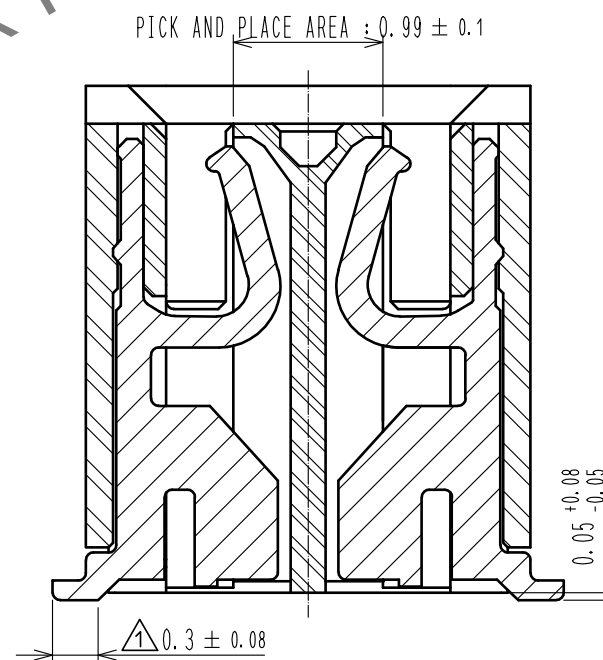

NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2 IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3 GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.
4 HRS MARK AND CAV NO. IS INDICATED IN APPROX POSITION SHOWN.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 10 : 1		COUNT 5	DESCRIPTION OF REVISIONS DIS-H-00009450	DESIGNED RH. KAGAMI	CHECKED YK. SATAKE	DATE 20210527
 HIROSE ELECTRIC CO., LTD.	APPROVED +MO. ISHIDA		20161005		DRAWING NO. EDC-321699-58-01			
	CHECKED +TS. MIYAZAKI		20161005		PART NO. DF40HC(3.5)-30DS-0.4V(58)			
	DESIGNED +SH. HOSODA		20161005		CODE NO. CL0684-4136-7-58			
	DRAWN +SN. NUMAZAKI		20161004		 			

