

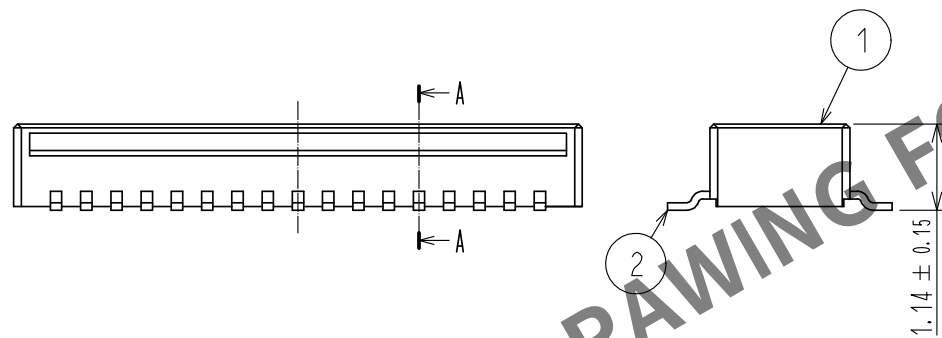



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

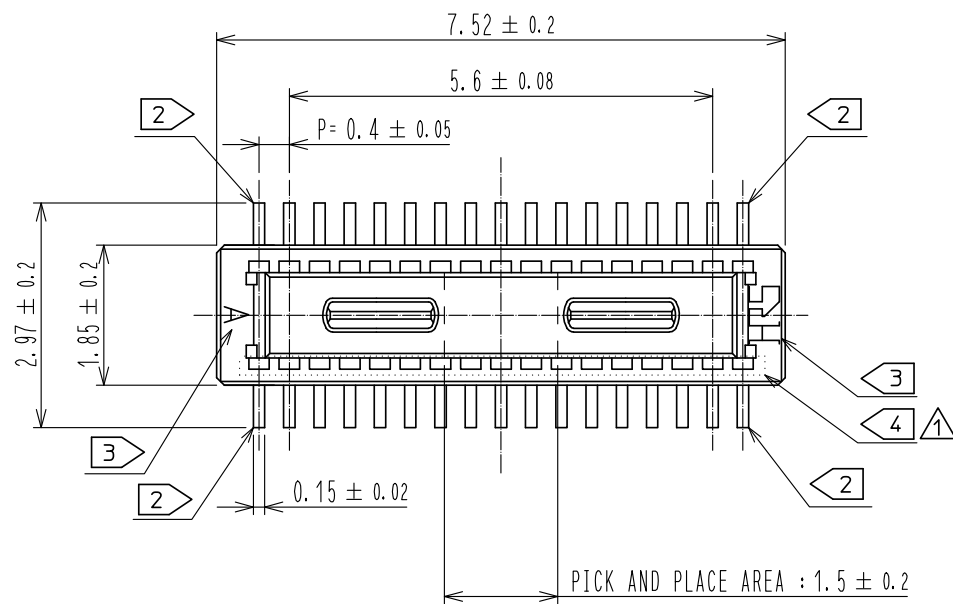

RECOMMENDED PATTERN

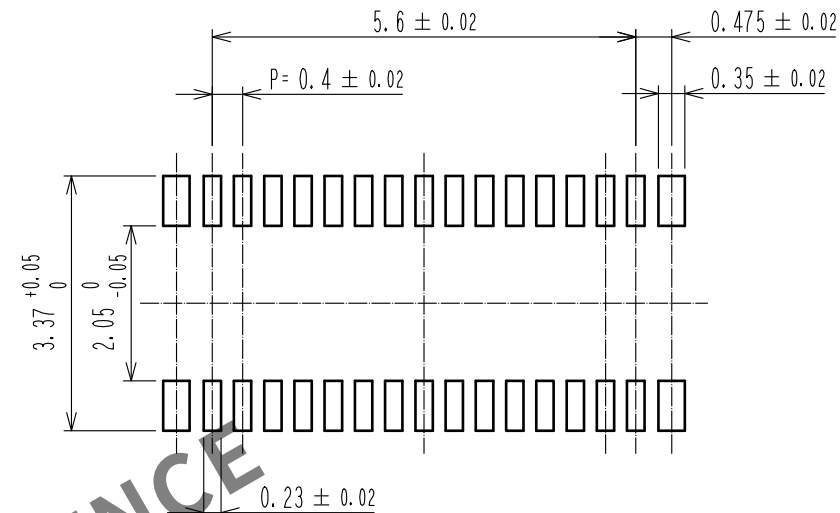

RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO: 80% FOR LEAD PAD

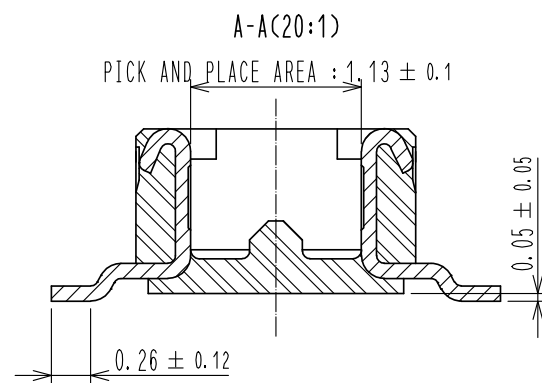

- NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
2 EACH ONE CONTACT AT 4 CORNERS SHALL BE USED AS METAL HOLD DOWN.
3 HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
4 THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

2	COPPER ALLOY	CONTACT AREA: GOLD $0.05 \mu\text{m}$ MIN SMT LEAD: GOLD $0.05 \mu\text{m}$ MIN UNDERPLATING: NICKEL $1 \mu\text{m}$ MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
			5	PS	BLACK
			4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 10:1	COUNT 3	DESCRIPTION OF REVISIONS DIS-H-00005459	DESIGNED YK. SATAKE
HIROSE ELECTRIC CO., LTD.		APPROVED : WR. FUKUCHI	20190508	DRAWING NO.	EDC-386694-51-00
		CHECED : TS. MIYAZAKI	20190508	PART NO.	DF40TC-30DP-0.4V(51)
		DESIGNED : SJ. WADA	20190508	CODE NO.	CL684-4263-0-51
		DRAWN : RH. KAGAMI	20190508		

