
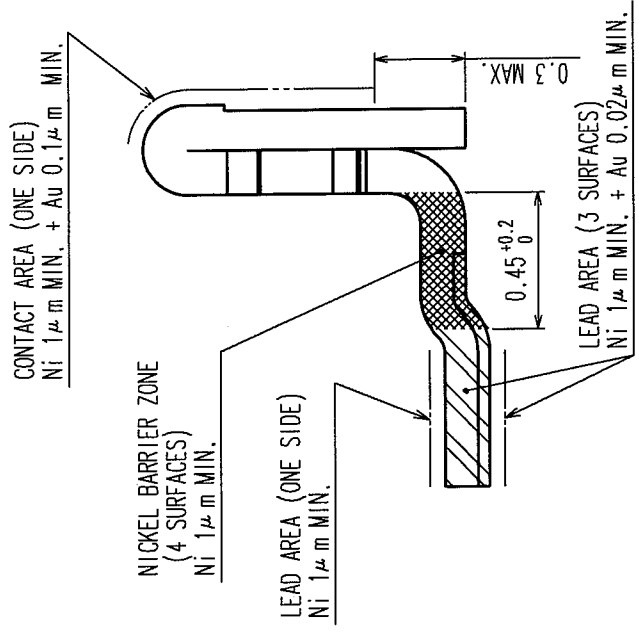


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓	3	RE-H-06510	T.Y	T.S	04.09.30	✓				- .
✓					.	✓				.
✓					.	✓				.

Fig.1 : PLATING SPECIFICATION (40:1) Fig.2 : RECOMMENDED PATTERN

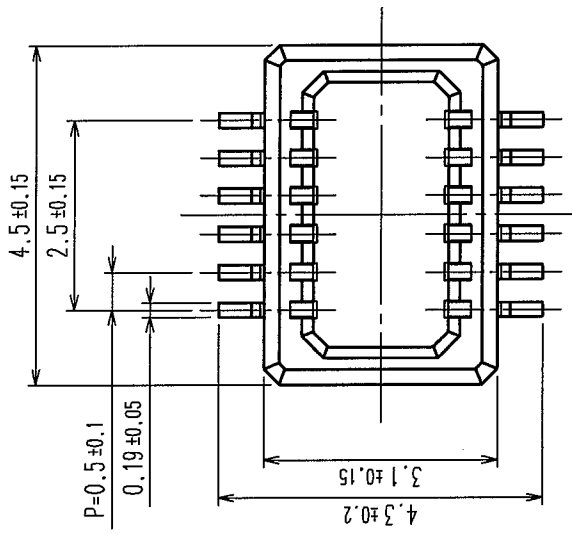

OTHERS : Ni 1 μ m MIN. + Au FLASH

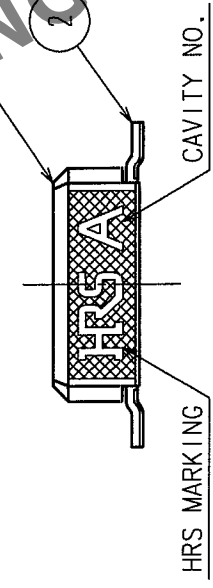


Fig.3 : A-A CROSS SECTION VIEW


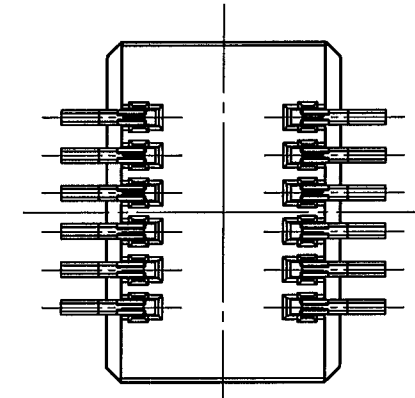


Fig. 4 : MATING VIEW

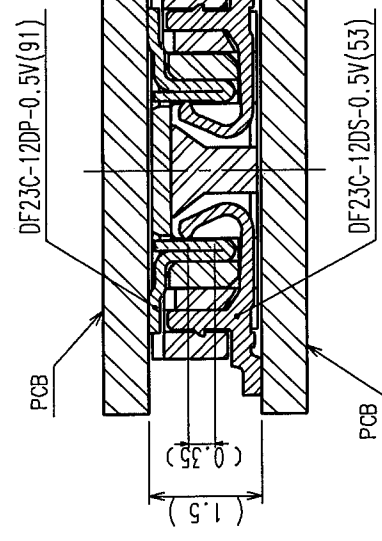

NOTES 1 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

2 REFER TO Fig.1

3 WHEN A PART MARKED WITH  HAS A PATTERN BUT NO RESIST ON IT, TAKE CARE TO PREVENT THE CONNECTOR FROM TOUCHING IT.

2	PHOSPHOR BRONZE		4	POLYESTER	CLEAR	
1	LCP	BLACK, UL94V-0	3	PS	CLEAR	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)						
		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		F. Matsuki '03. 8. 25	T. Yamamoto '03. 8. 25	K. Akiyama '03. 8. 25	K. Akiyama '03. 8. 25	.
		DRAWING NO. EDC3-302689-01		PART NO. DF23C-12DP-0.5V(91)		
SCALE 10 : 1		HIROSE ELECTRIC CO., LTD				
UNITS						
		CODE NO.			CL688-0809-0-91	
					1 / 2	

