


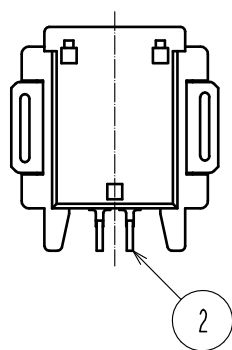
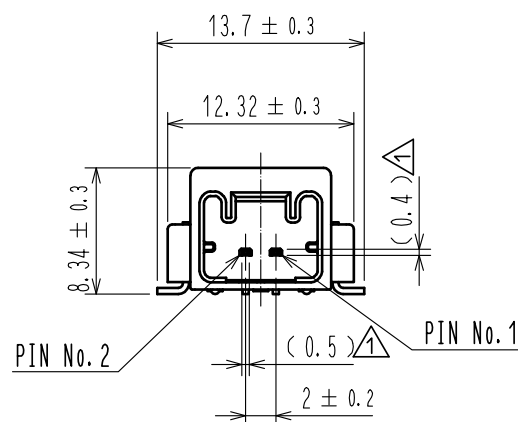


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



ELV. RoHS COMPLIANT

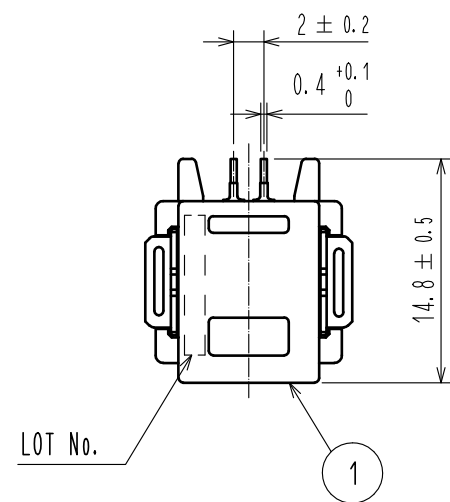

MATED CONNECTORS

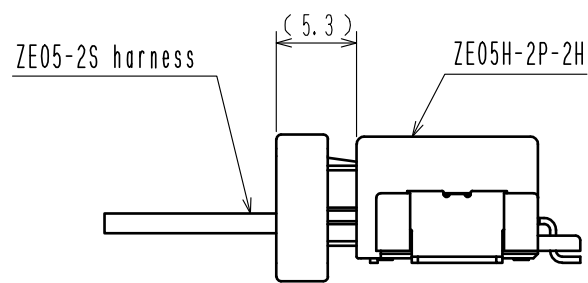

RECOMMENDED PCB PATTERN

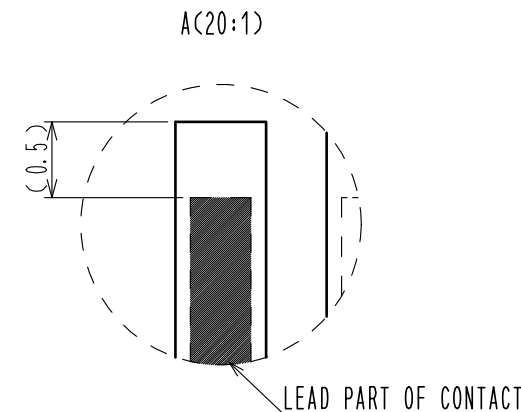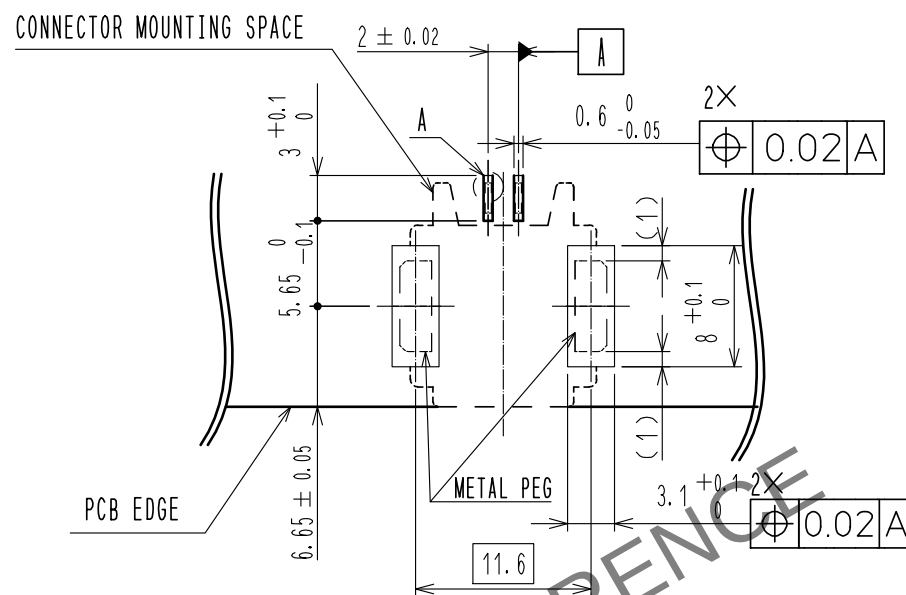

NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
(REFER TO RIGHT FIG.)
USED REFLOW SYSTEM


NO. OF CYCLES : 2 MAX Δ
PEAK : 250°C
OVER 230°C : 20~40s
PREHEAT : 150~180°C
90~120s Δ

2. TEMPERATURE FOR SOLDERING IRON
: 280~300°C WITHIN 2s

3. CO-PLANARITY SHALL BE 0.1mm MAX.

4. RECOMMENDED PCB THICKNESS IS 1.6mm.

5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

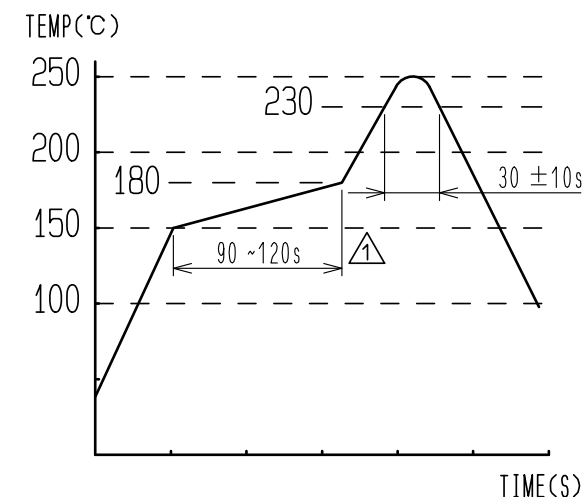

2	BRASS	SURFACE PLATING : TIN PLATING 1μm min UNDER PLATING : NICKEL 1μm min	5	POLYESTER	
			4	POLYSTYRENE	
1	PA	BLACK UL94V-0	3	BRASS	SURFACE PLATING : TIN PLATING 1μm min UNDER PLATING : NICKEL 1μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 5	DESCRIPTION OF REVISIONS DIS-T-00003979	DESIGNED YONGMUN LEE
HIROSE ELECTRIC CO., LTD.		APPROVED : HK. UMEHARA	20180424	DRAWING NO.	EDC-373528-00-00
		CHECKED : AH. EDASHIGE	20180424	PART NO.	ZE05H-2P-2H
		DESIGNED : YONGMUN LEE	20180424	CODE NO.	CL752-2109-0-00
		DRAWN : SK. HANAWA	20180424		
					DATE 20181119


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE

PACKING STYLE DRAWING

REEL DIMENSION (FREE)


PRODUCTS DIRECTION

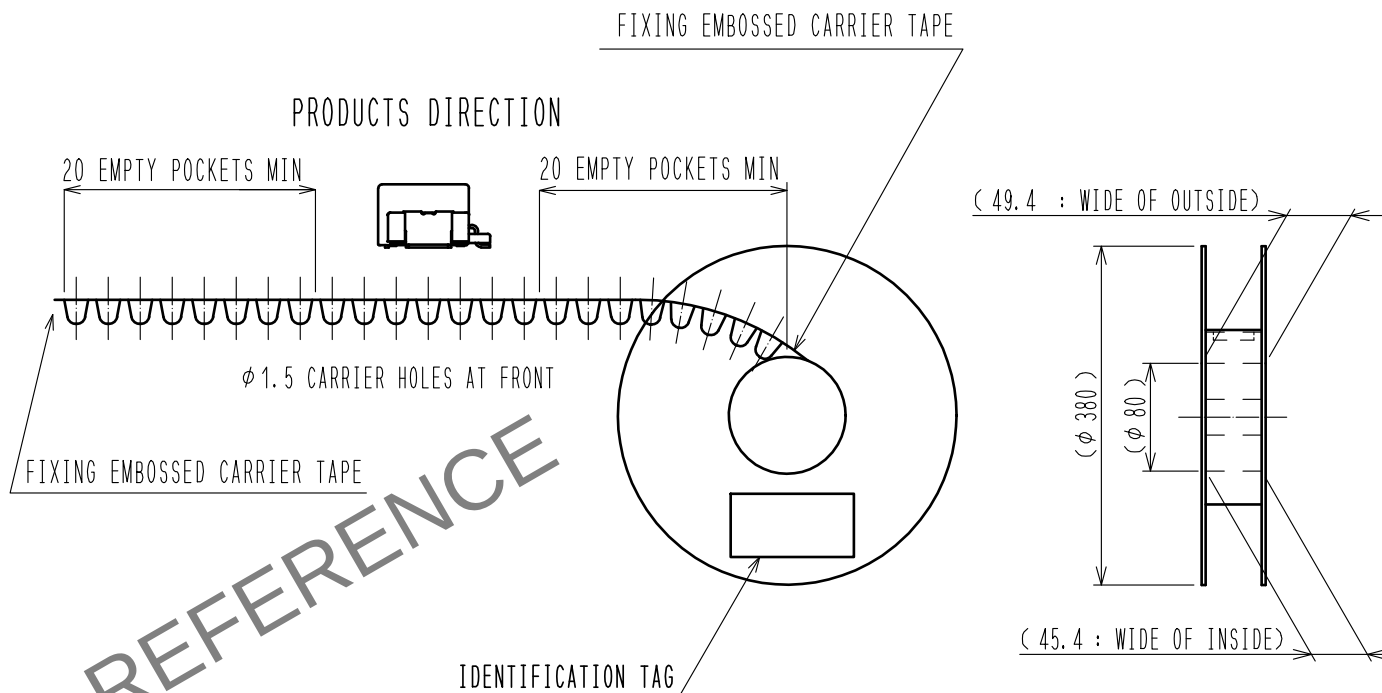

300 PCS/REEL

CARDBOARD DIMENSION (FREE)

W=(405) (mm)
D=(405) (mm)
H= (51) (mm)

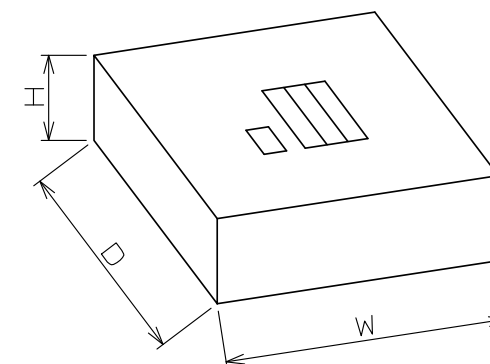

DRAWING FOR REFERENCE



DRAWING NO.	EDC-373528-00-00
PART NO.	ZE05H-2P-2H
CODE NO.	CL752-2109-0-00