
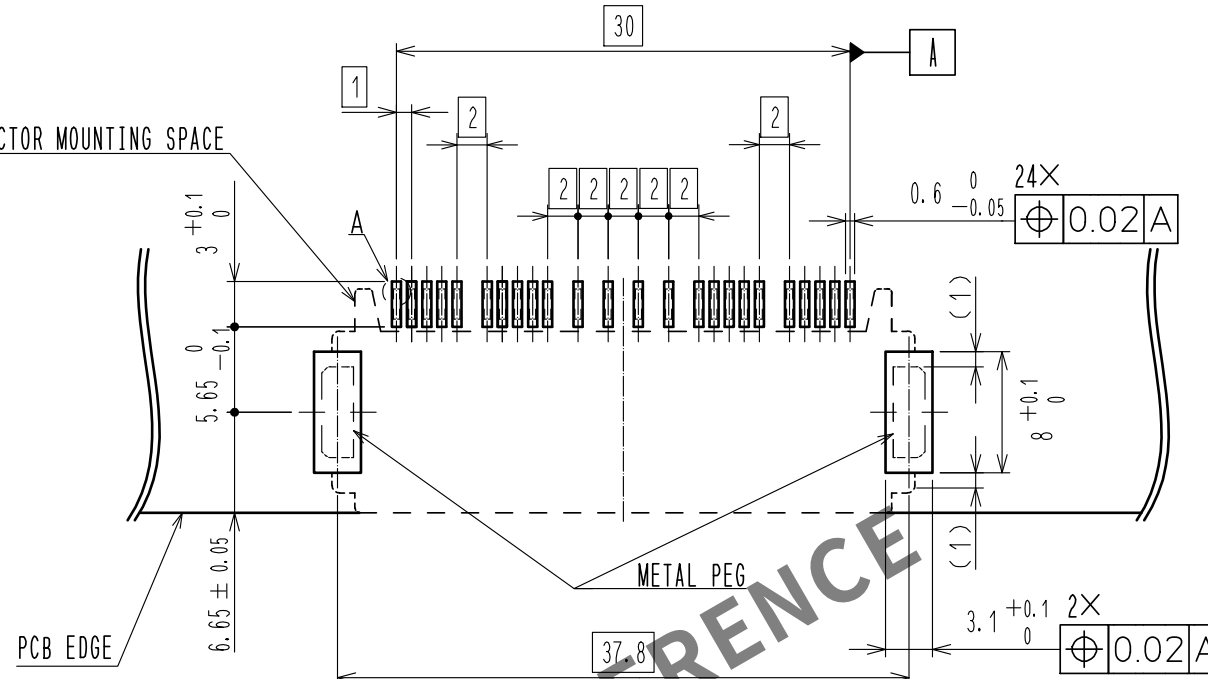
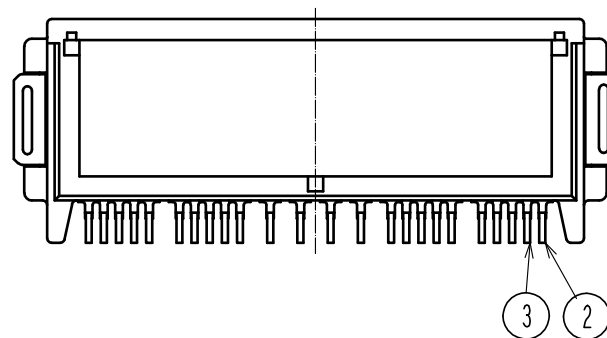
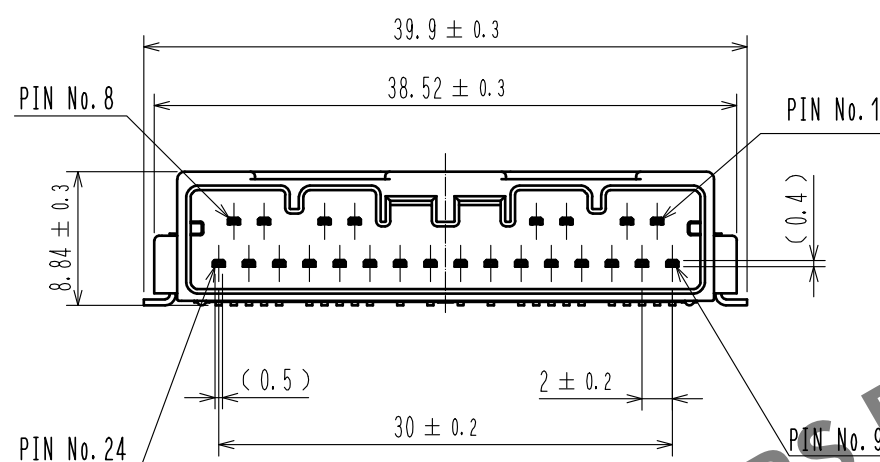


Diagram illustrating the connection of the ZE05 harness to the ZE05H-24DP-2H unit. The harness is connected to the rear of the unit, and a dimension of 5.3 is indicated for the distance between the connection point and the front of the unit.

5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

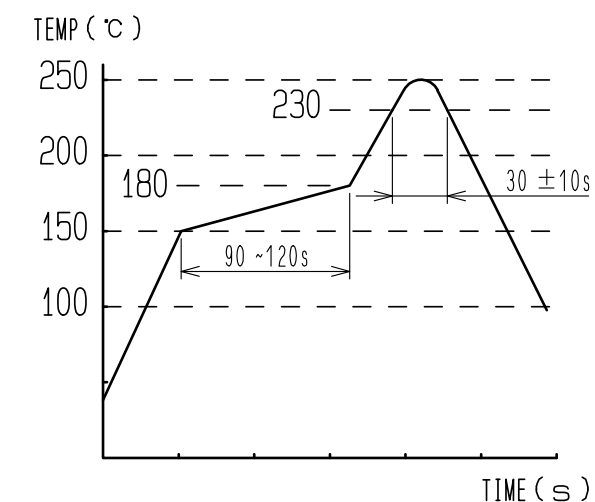


3	BRASS	SURFACE PLATING : TIN PLATING 1μm min					
		UNDER PLATING : NICKEL 1μm min		6	POLYESTER		
2	BRASS	SURFACE PLATING : TIN PLATING 1μm min		5	POLYSTYRENE		
		UNDER PLATING : NICKEL 1μm min		4	BRASS	SURFACE PLATING : TIN PLATING 1μm min	
1	PA	BLACK UL94V-0					
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1						
HIROSE ELECTRIC CO., LTD.		APPROVED : AH. EDASHIGE		20190125	DRAWING NO. EDC-373535-00-00			
		CHECKED : HH. TSUKUMO		20190125	PART NO. ZE05H-24DP-2H			
		DESIGNED : YH. MAMADA		20190125	CODE NO. CL752-2116-0-00			
		DRAWN : NF. IKEDA		20190125	 1/			


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE

PACKING STYLE DRAWING

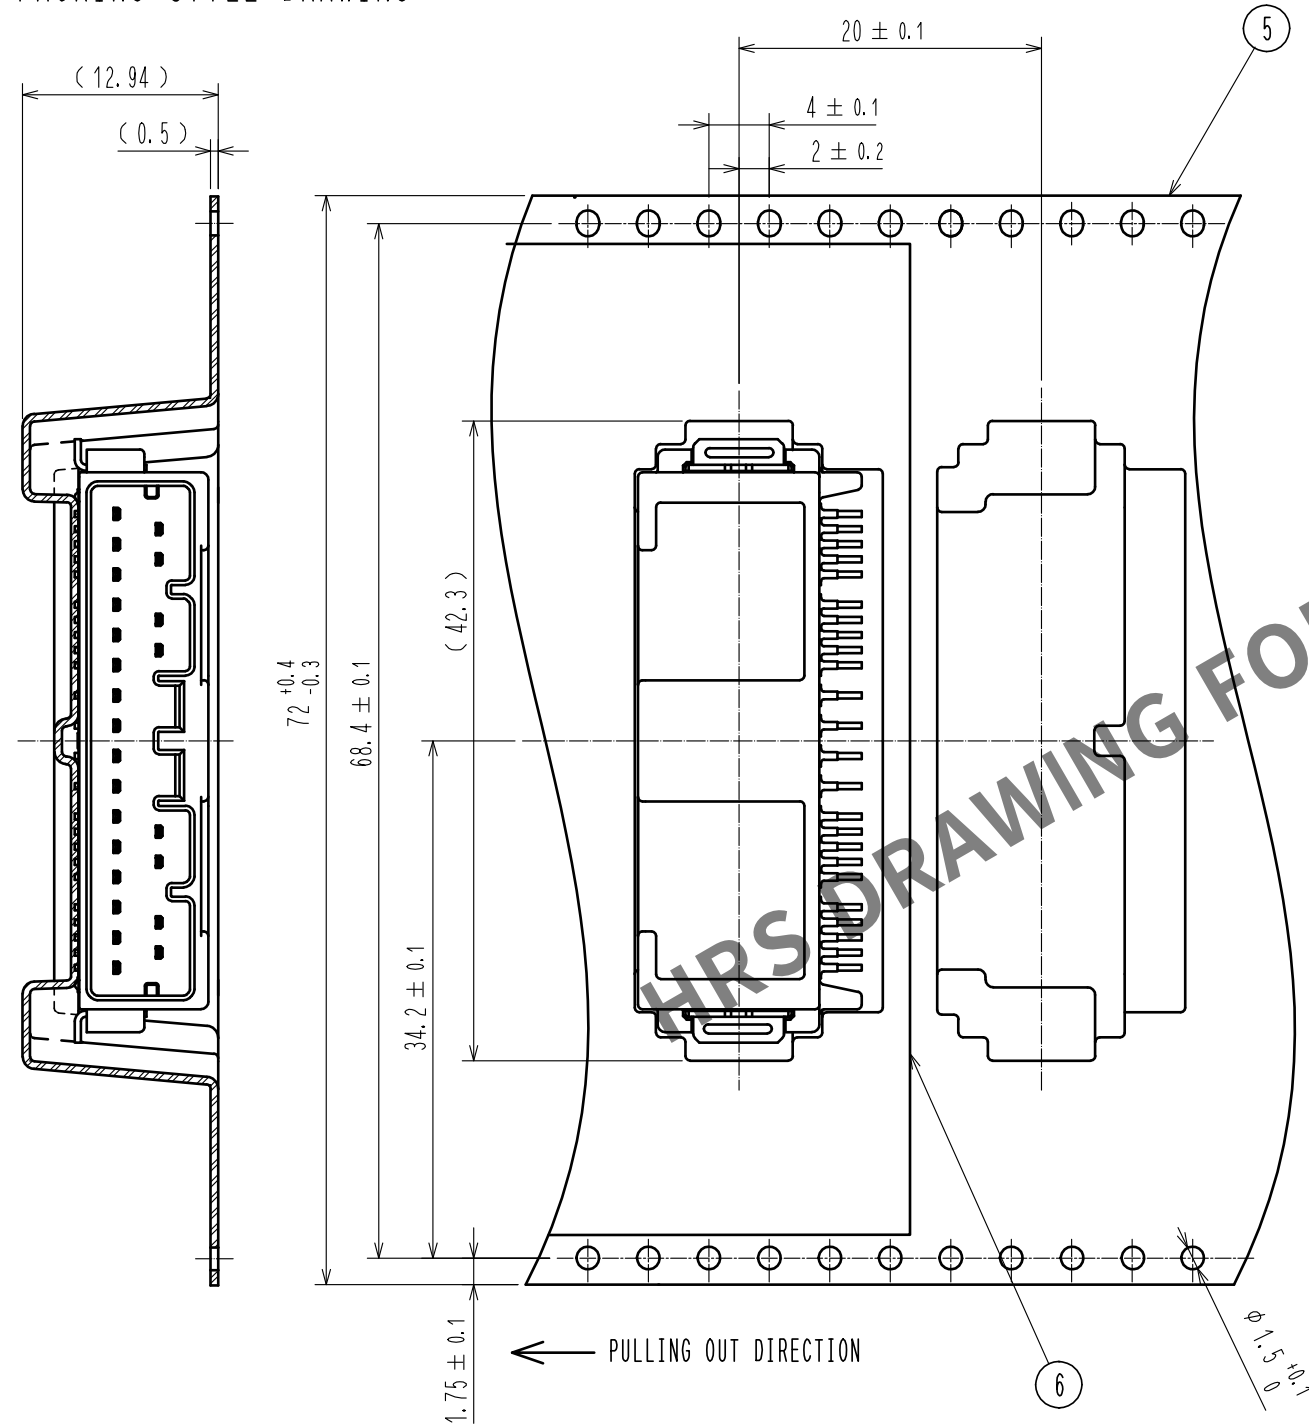

REEL DIMENSION (FREE)

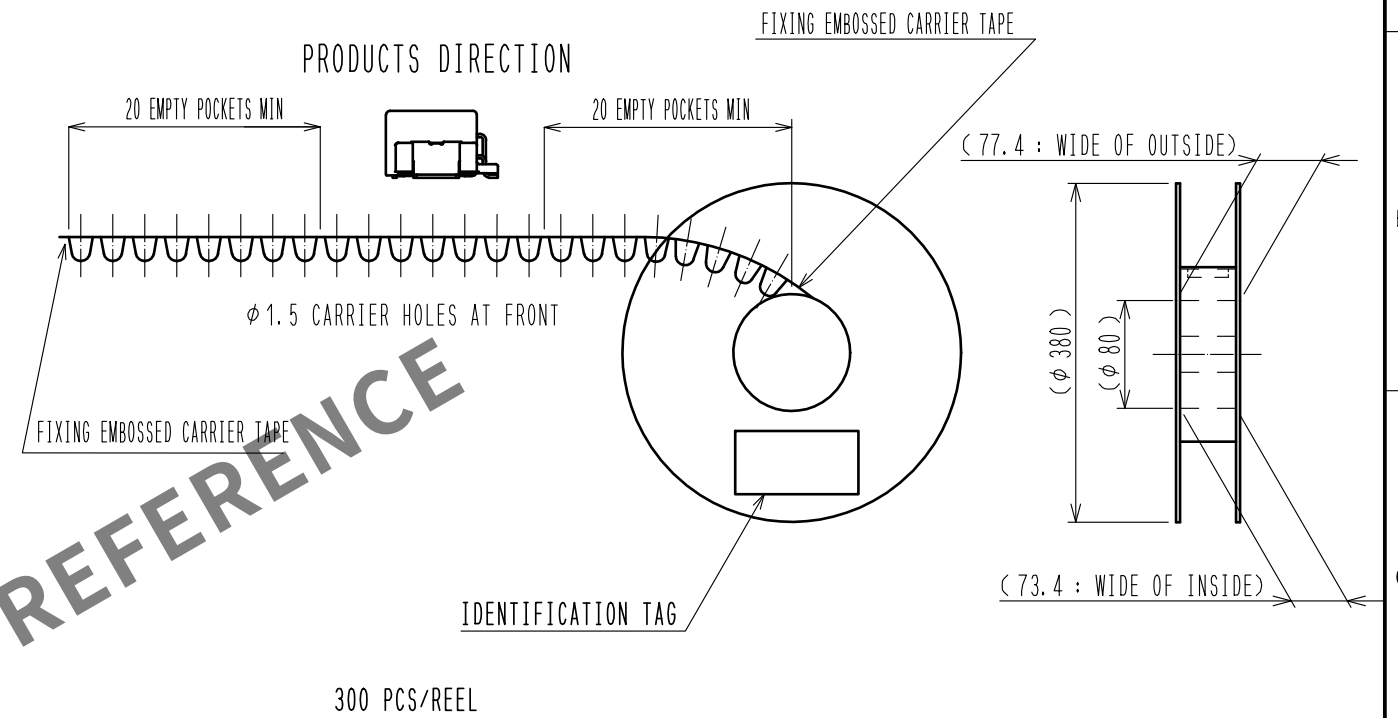

CARDBOARD DIMENSION (FREE)

W=(405) (mm)
D=(405) (mm)
H= (80) (mm)

