




Oct.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

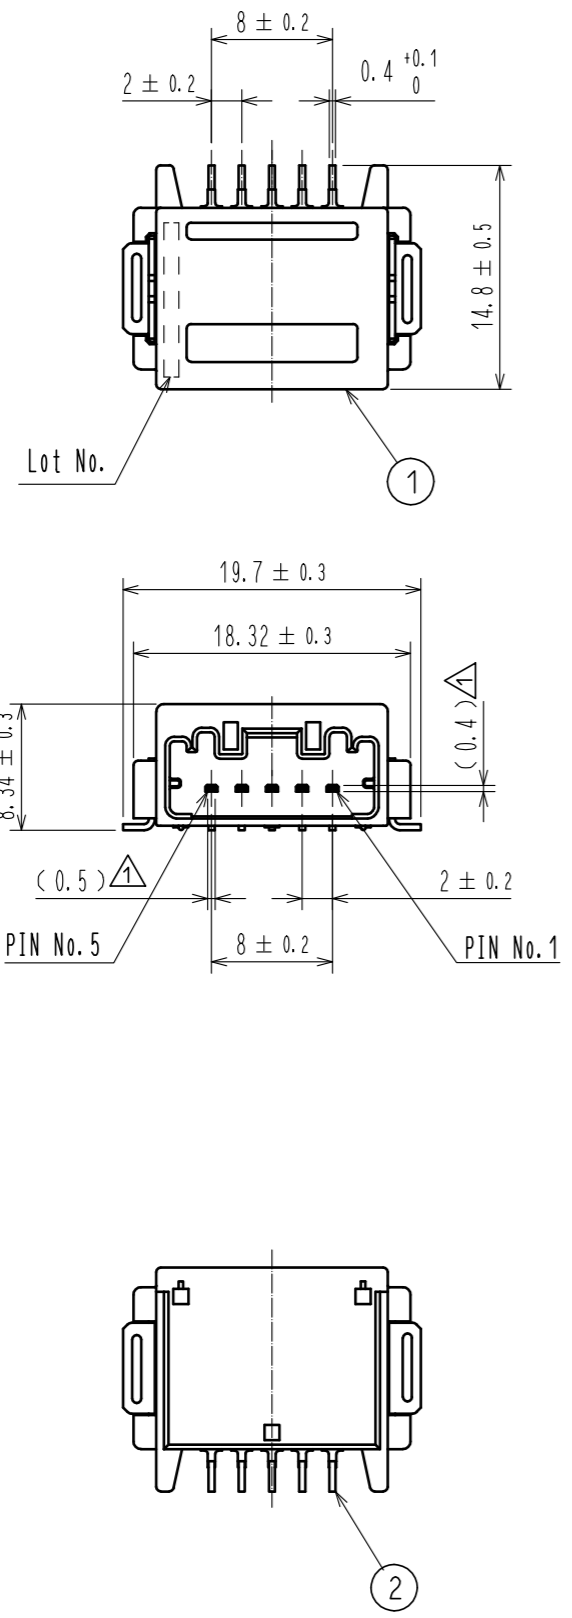


HRS DRAWING FOR REFERENCE

RECOMMENDED PCB PATTERN

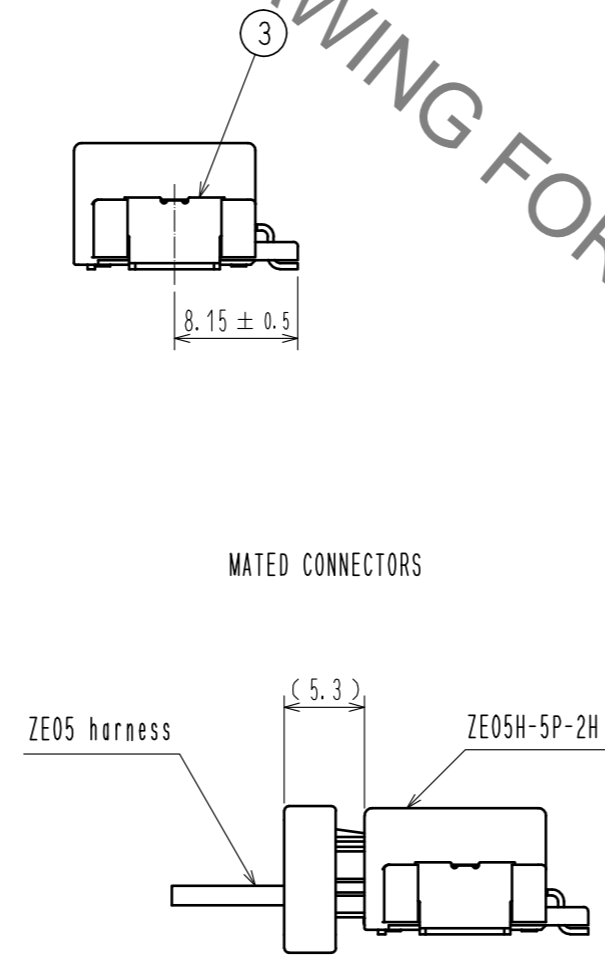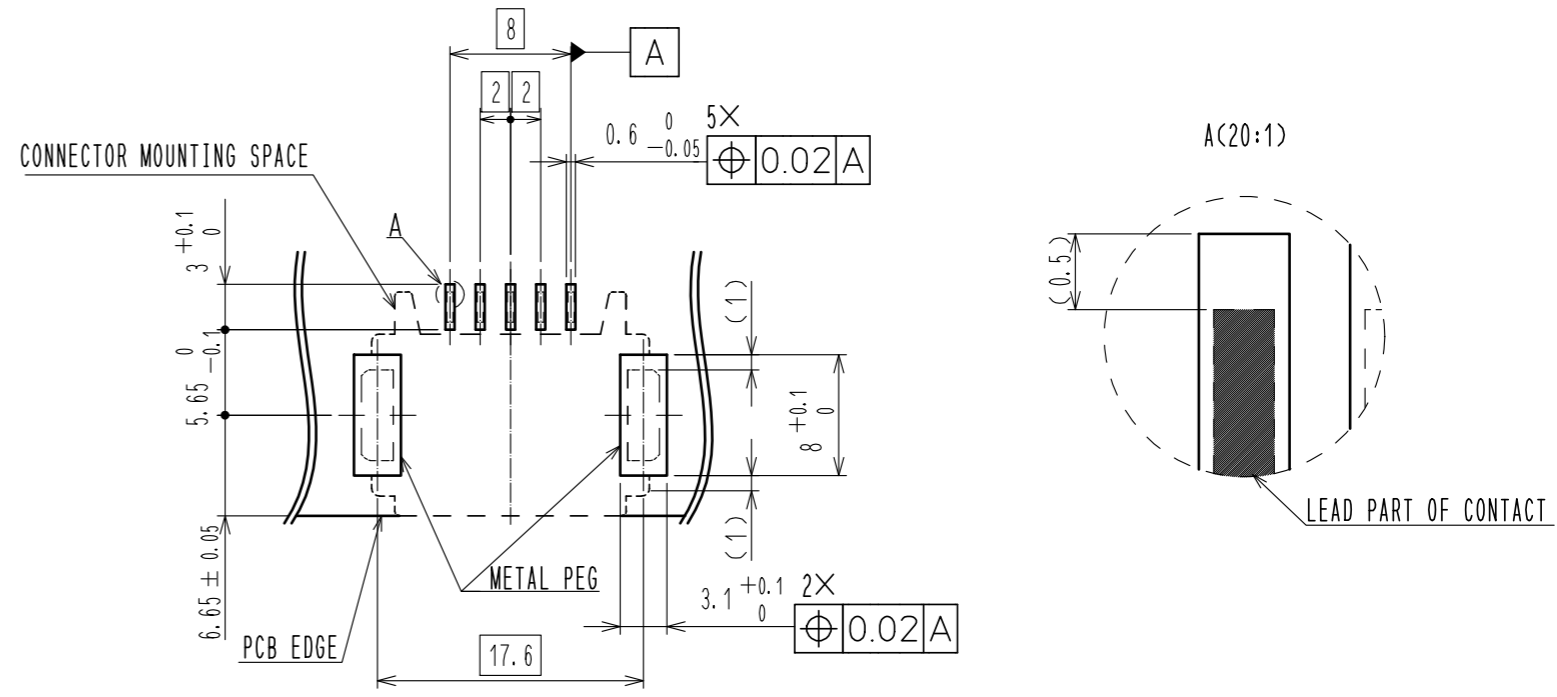

- NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.) USED REFLOW SYSTEM
- : IR IN THE AIR OR NITROGEN
 - NO. OF CYCLES : 2 MAX
 - PEAK : 250°C
 - OVER 230°C : 20~40s
 - PREHEAT : 150~180°C
 - 90~120s Δ
2. TEMPERATURE FOR SOLDERING IRON : 280~300°C WITHIN 2s
3. CO-PLANARITY SHALL BE 0.1mm MAX.
4. RECOMMENDED PCB THICKNESS IS 1.6mm.
5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

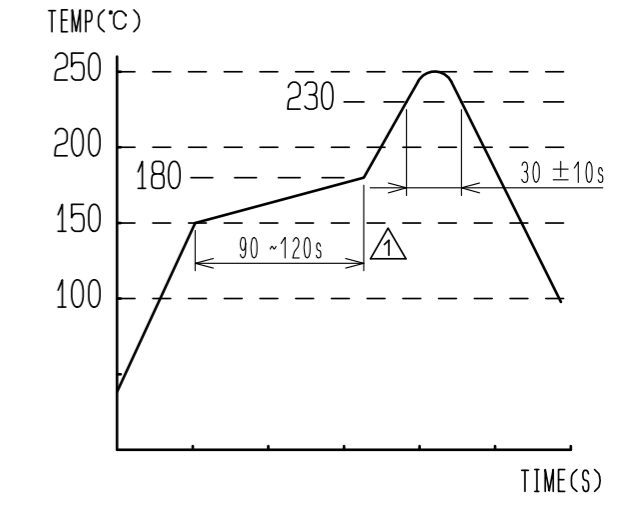



2	BRASS	SURFACE PLATING : TIN PLATING 1μm min	5	POLYESTER	
		UNDER PLATING : NICKEL 1μm min	4	POLYSTYRENE	
1	PA	BLACK UL94V-0	3	BRASS	SURFACE PLATING : TIN PLATING 1μm min
					UNDER PLATING : NICKEL 1μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	\odot \triangle	SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1	4	DIS-T-00003979	
APPROVED : HK. UMEHARA		20180906	DRAWING NO. EDC-383982-00-00		
CHECKED : HH. TSUKUMO		20180906	PART NO. ZE05H-5P-2H		
DESIGNED : YH. MAMADA		20180905	CODE NO. CL752-2120-0-00		
DRAWN : MN. SATOH		20180905			
			Δ 1/2		

Oct.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE


REEL DIMENSION (FREE)

PACKING STYLE DRAWING

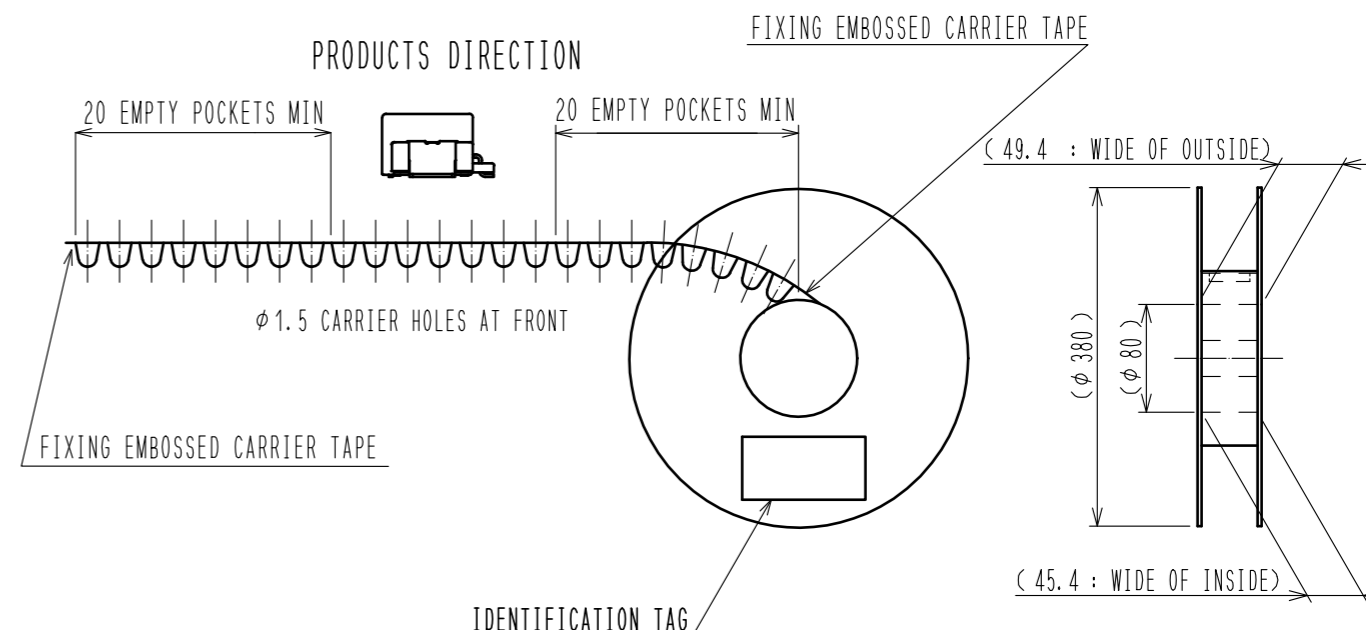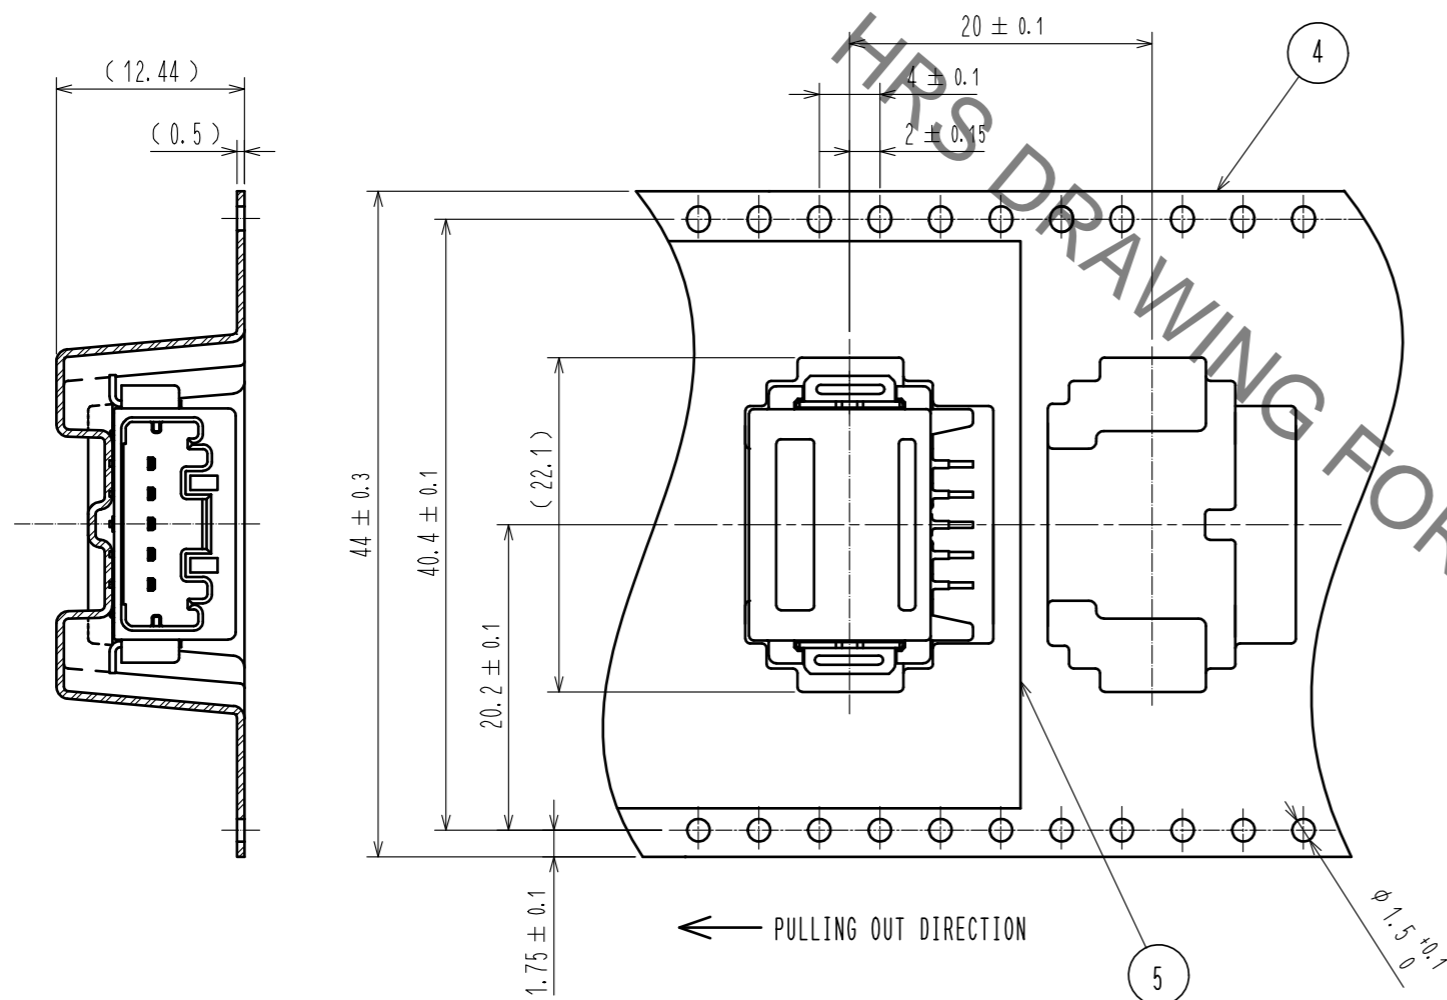

CARDBOARD DIMENSION (FREE)

W=(405) (mm)
 D=(405) (mm)
 H=(51) (mm)

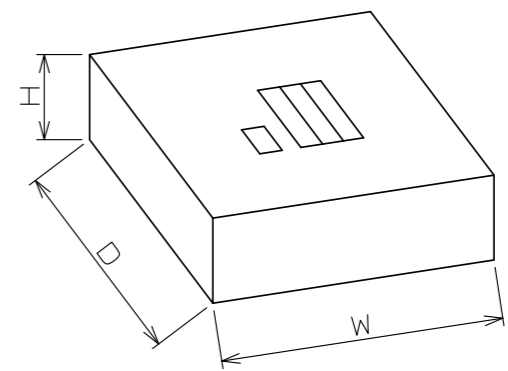

HRS DRAWING FOR REFERENCE

ASSEMBLY DRAWING	HRS	DRAWING NO.	EDC-383982-00-00
		PART NO.	ZE05H-5P-2H
		CODE NO.	CL752-2120-0-00
			2/2