
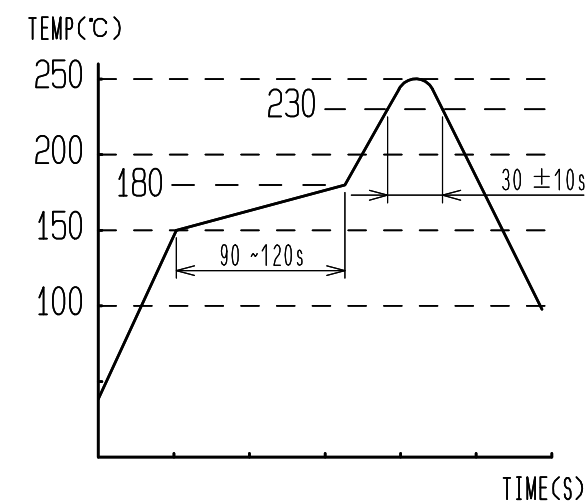
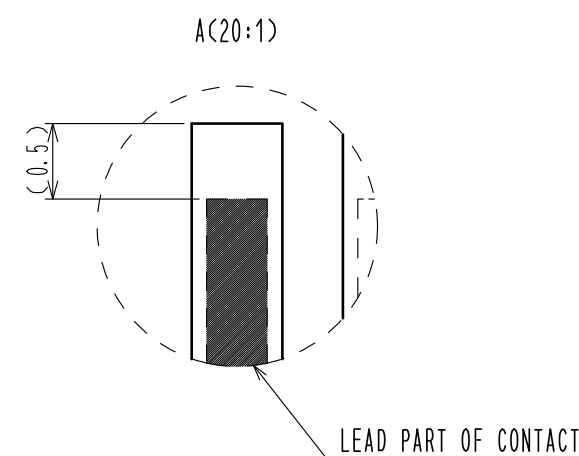
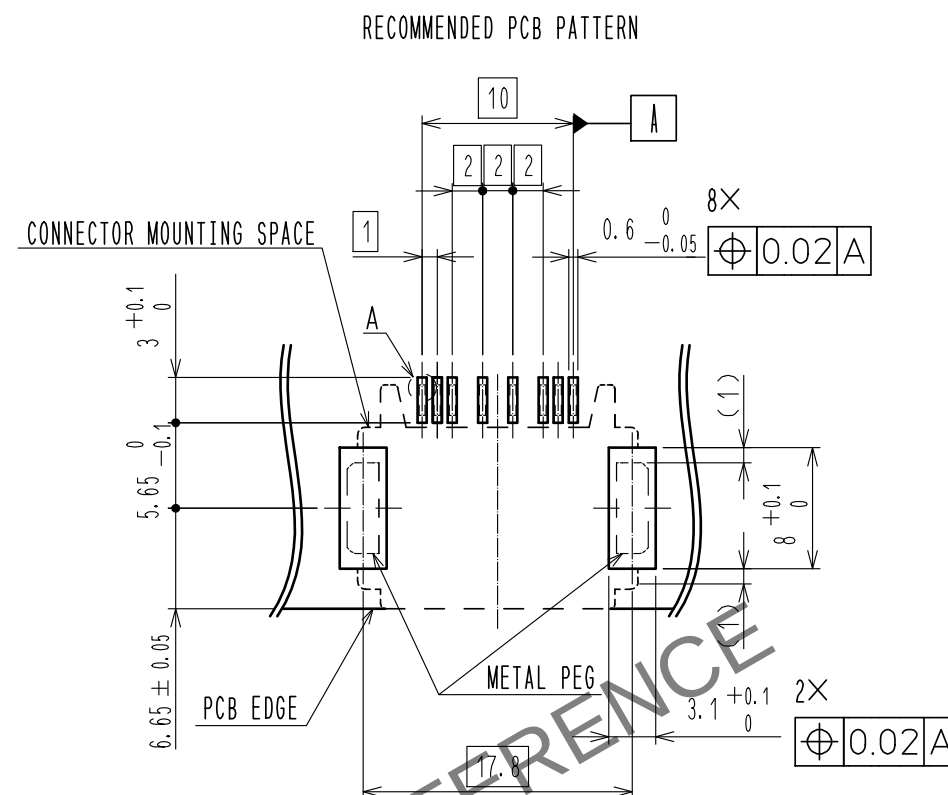
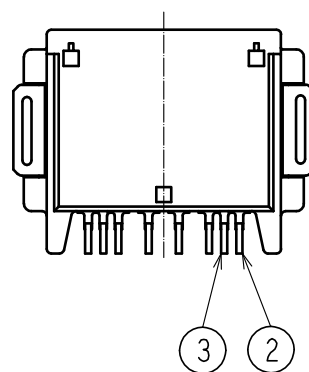


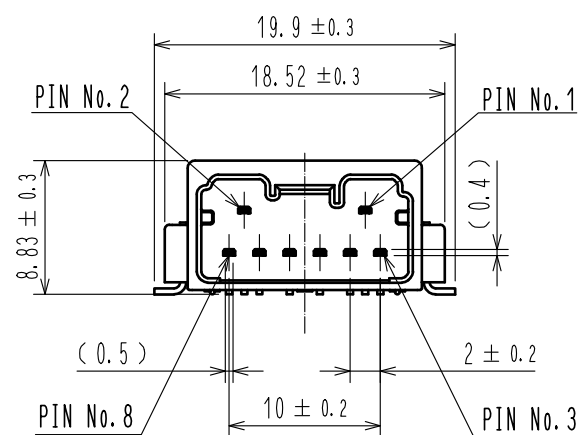

NO. OF CYCLES : 2 MAX
PEAK : 250℃
OVER 230℃ : 20~40s
PREHEAT : 150~180℃
90~120s


2. TEMPERATURE FOR SOLDERING IRON
:280~300°C WITHIN 2s

3. CO-PLANARITY SHALL BE 0.1mm MAX.


4. RECOMMENDED PCB THICKNESS IS 1.6mm.

5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

MATED CONNECTORS

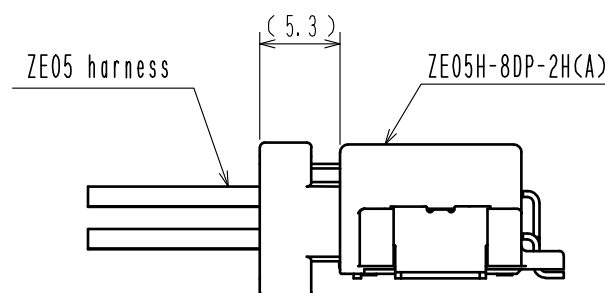

3	BRASS	SURFACE PLATING : TIN PLATING 1μm min					
		UNDER PLATING : NICKEL 1μm min	6	POLYESTER			
2	BRASS	SURFACE PLATING : TIN PLATING 1μm min	5	POLYSTYRENE			
		UNDER PLATING : NICKEL 1μm min	4	BRASS	SURFACE PLATING : TIN PLATING 1μm min		
1	PA	GRAY UL94V-0			UNDER PLATING : NICKEL 1μm min		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	


UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HK. UMEHARA		20190511	DRAWING NO.	EDC-384606-00-00		
		CHECKED : HK. UMEHARA		20190511	PART NO.	ZE05H-8DP-2H(A)		
		DESIGNED : YH. MAMADA		20190511	CODE NO.	CL752-2122-0-00		
		DRAWN : MINTAE KANG		20190511				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


PACKING STYLE

REEL DIMENSION (FREE)

PACKING STYLE DRAWING

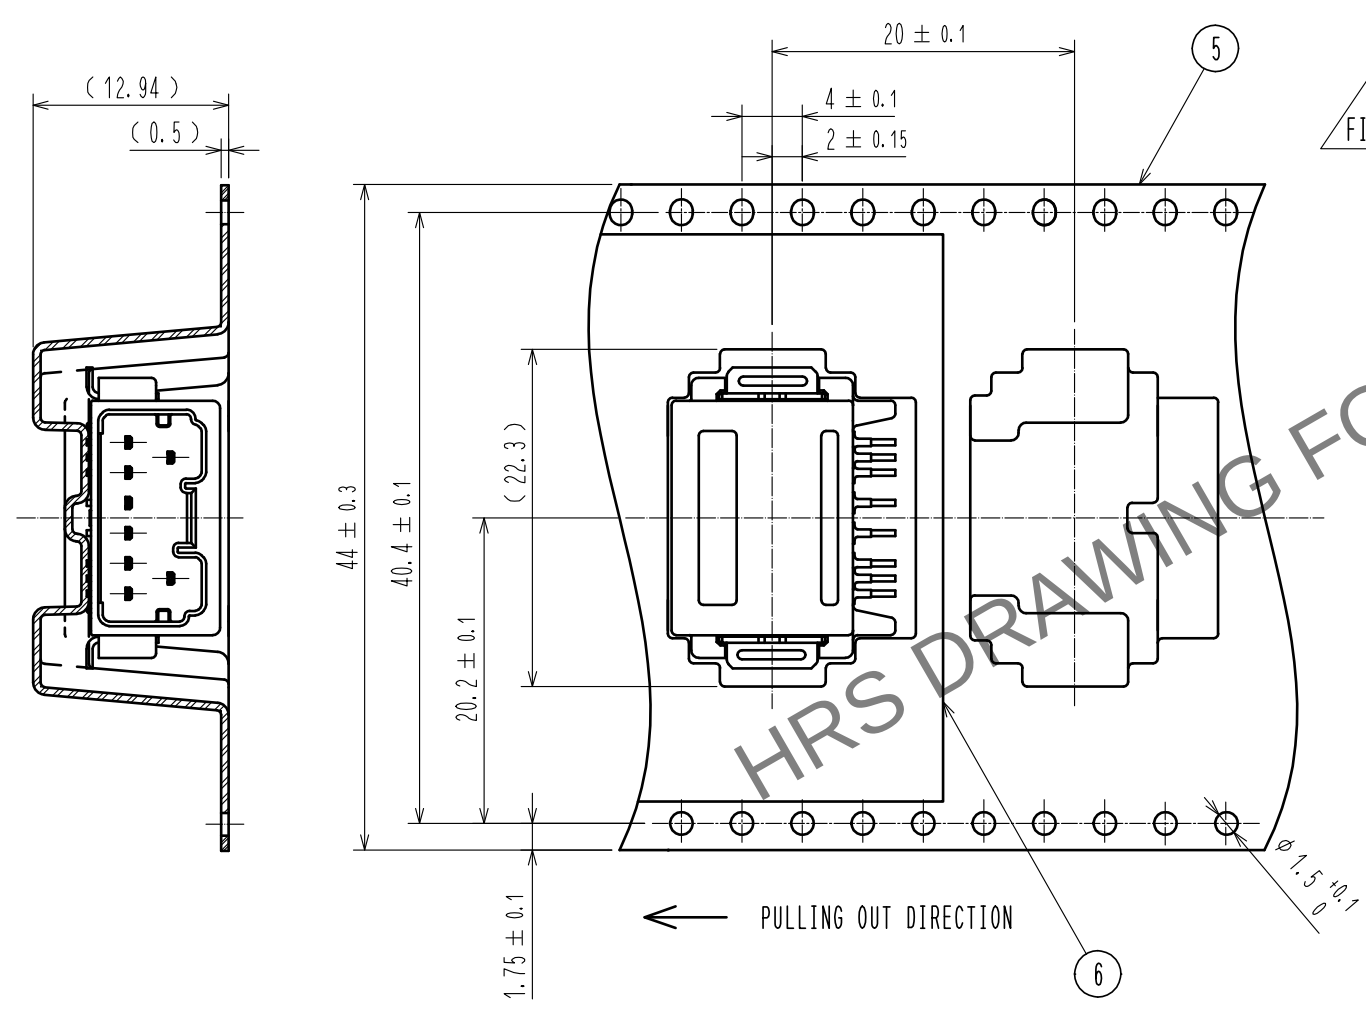


PRODUCTS DIRECTION

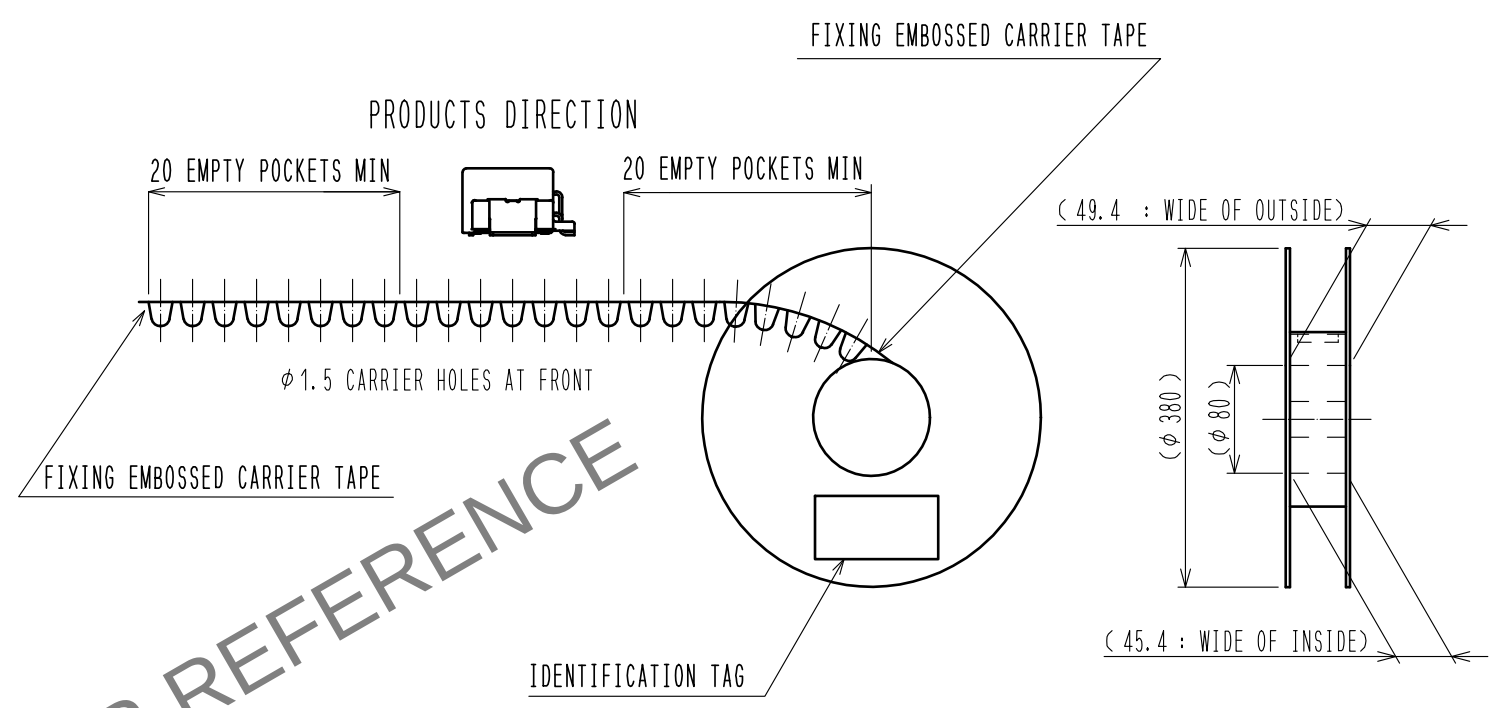

CARDBOARD DIMENSION (FREE)

W=(405) (mm)
D=(405) (mm)
H= (51) (mm)

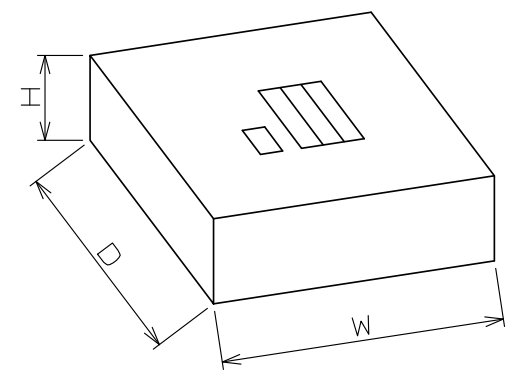

HRS	DRAWING NO.	EDC-384606-00-00		2/2
	PART NO.	ZE05H-8DP-2H(A)		
	CODE NO.	CL752-2122-0-00		