
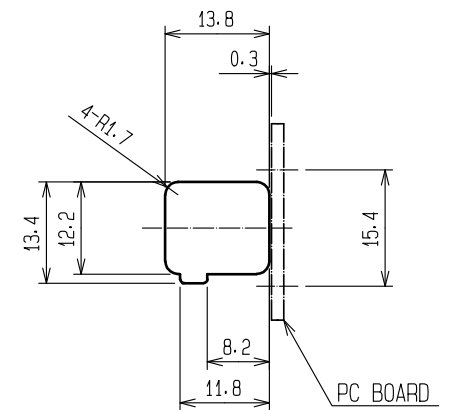
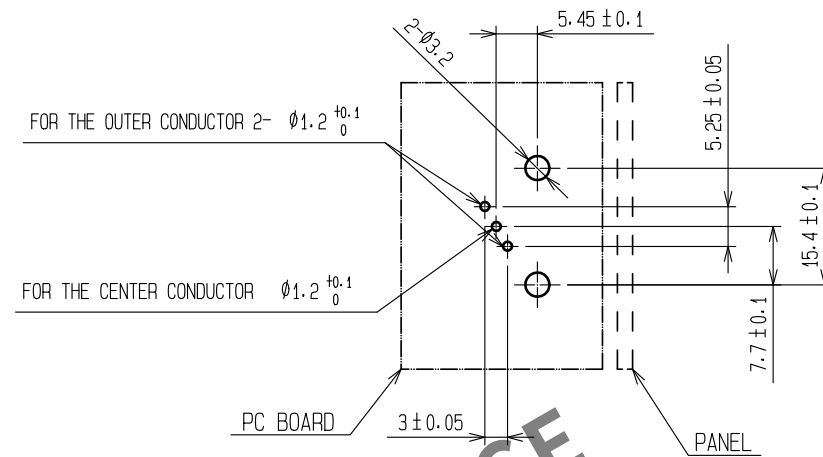






May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

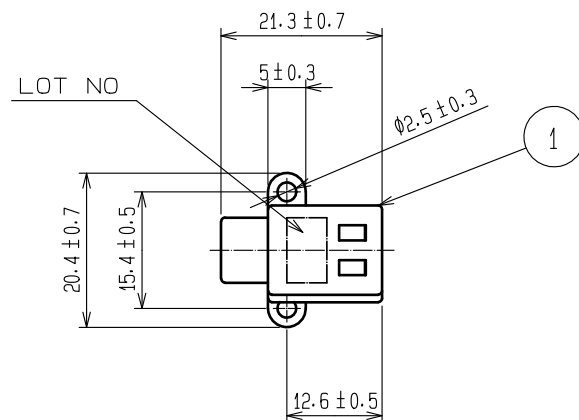

RECOMMENDED PC BOARD HOLE PATTERN

RECOMMENDED PANEL CUTOUT

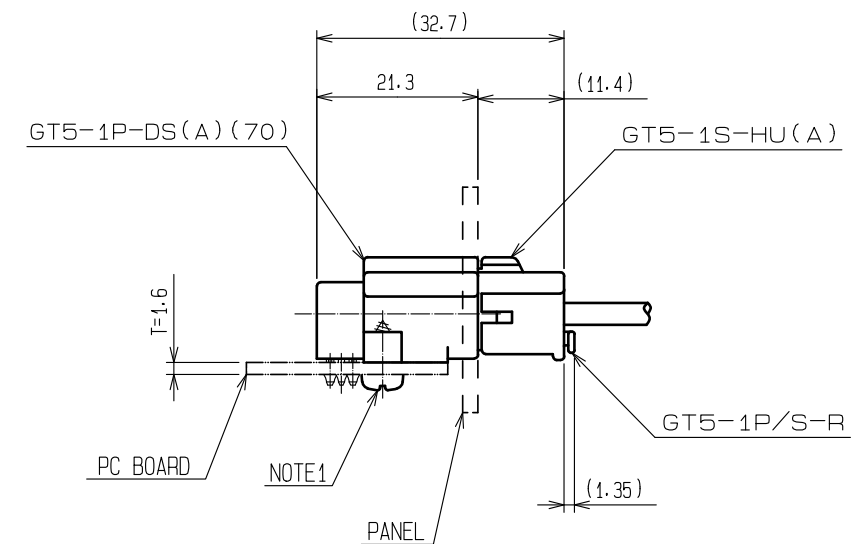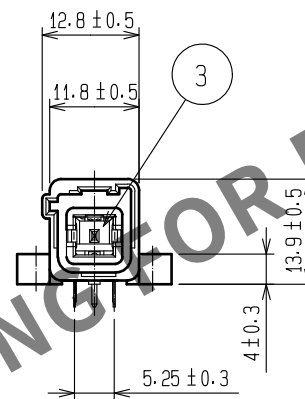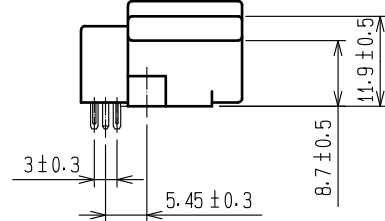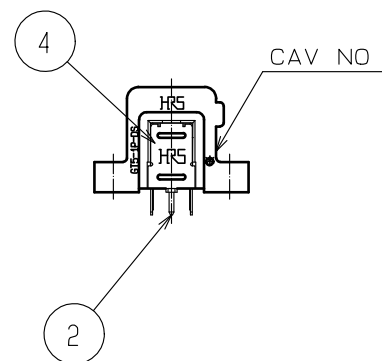

MATED CONNECTORS

NOTE

1. FIXING SCREW SHALL BE NOMINAL DIAMETER 3mm, LENGTH 6mm IN ACCORDANCE WITH CLASS 1 OR 4 OF JIS B1115, 1112. DO NOT USE ANY SCREWS OTHER THAN THE RECOMMENDED ONES.
2. APPLICABLE CONNECTOR: GT5-1S-HU(A) (CL755-0037-6)
3. INSTALL THE SCREWS PERPENDICULARLY TO THE BOARD.

2	BRASS	TIN PLATED, T=0.64	4	PHOSPHOR BRONZE	TIN PLATED, T=0.25
1	PBT	BROWN	3	PBT	DARK GRAY
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 1 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-T-00008754	DESIGNED KN. MIKAMI
HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA	20150903	DRAWING NO.	EDC-165310-70-01
		CHECKED : KI. HIROKAWA	20150903	PART NO.	GT5-1P-DS(A)(70)
		DESIGNED : TS. KUBOTA	20150819	CODE NO.	CL0755-0041-3-70
		DRAWN : TS. KUBOTA	20150819		
					DATE 20210326