

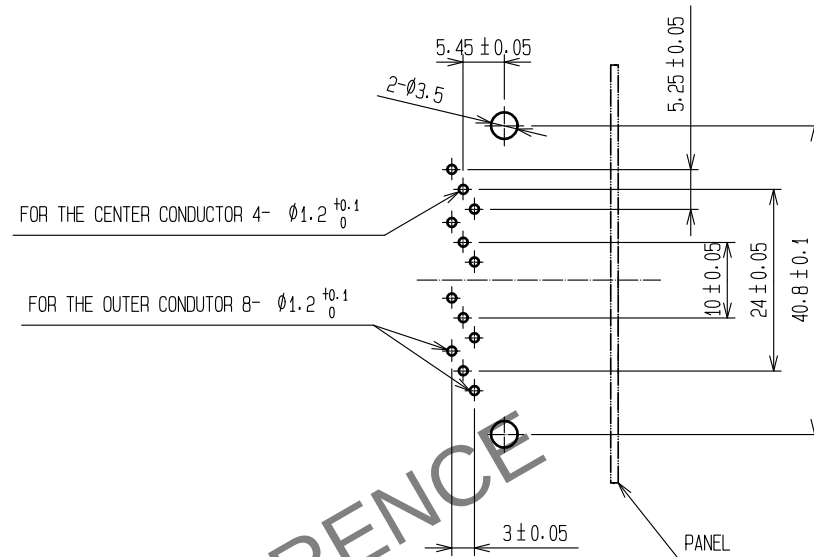
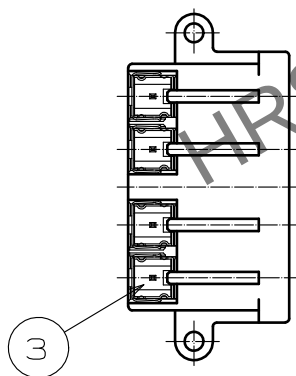
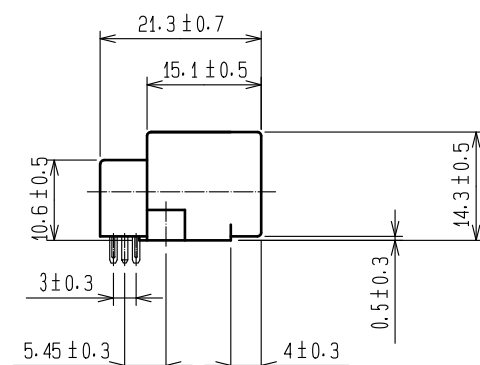
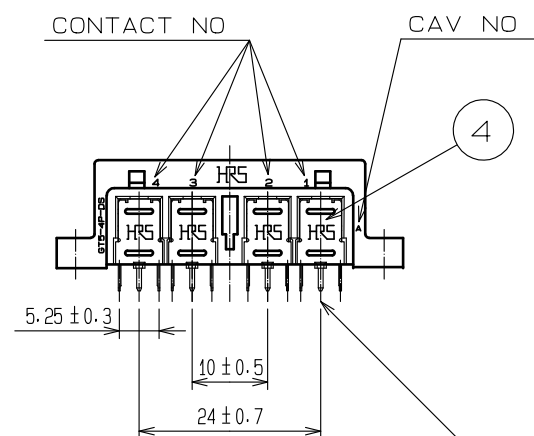


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


ELV. RoHS COMPLIANT

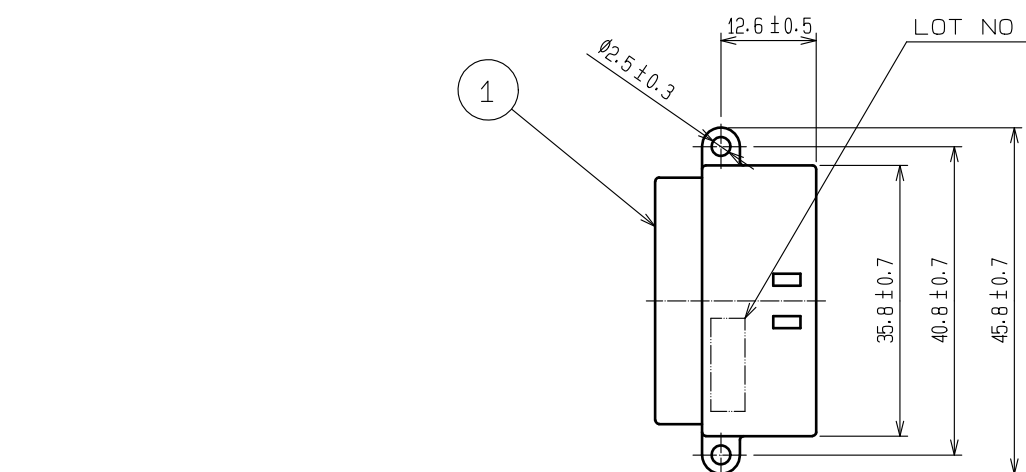

RECOMMENDED PC BOARD HOLE PATTERN

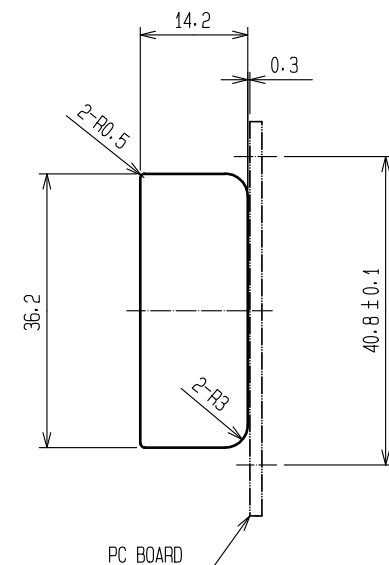

RECOMMENDED PANEL CUTOUT

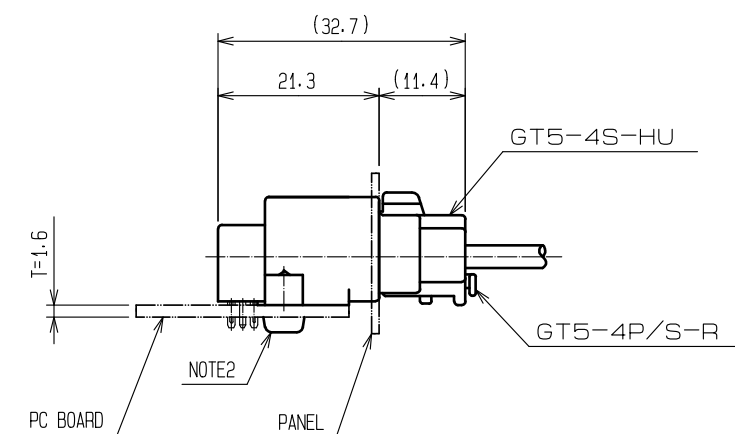

MATED CONNECTORS

- NOTE1. DEPENDING ON THE CIRCUMSTANCES RECESS OF WELDING SHALL BE ADDED TO MOLD TO PREVENT SINKAGE.
- ⚠ 2. FIXING SCREW SHALL BE NOMINAL DIAMETER 3mm IN ACCORDANCE WITH CLASS 1 OR 4 OF JISB1115, 1122. DO NOT USE ANY SCREWS OTHER THAN THE RECOMMENDED ONES.
3. APPLICABLE CONNECTOR: GT5-4S-HU (CL755-0056-0)
- ⚠ 4. INSTALL THE SCREWS PERPENDICULARLY TO THE BOARD.

2	BRASS	TIN PLATED	4	PHOSPHOR BRONZE	TIN PLATED
1	PBT	UL94HB, LIGHT GRAY	3	PBT	UL94V-0, DARK GRAY
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 1:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-T-00008754	DESIGNED KN. MIKAMI
HIROSE ELECTRIC CO., LTD.		APPROVED : KS. SATOH	20080611	DRAWING NO.	EDC3-165614-01
		CHECKED : NH. NAKATA	20080610	PART NO.	GT5-4P-DS(70)
		DESIGNED : MO. OKADA	20080609	CODE NO.	CL0755-0087-4-70
		DRAWN : MH. SHOUJI	20080522		
					DATE 20210326