



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT


MATED CONDITION (2:1)

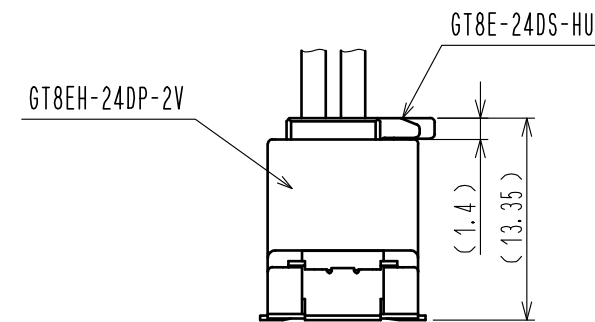

CONNECTOR WITH PICK & PLACE COVER (2:1)

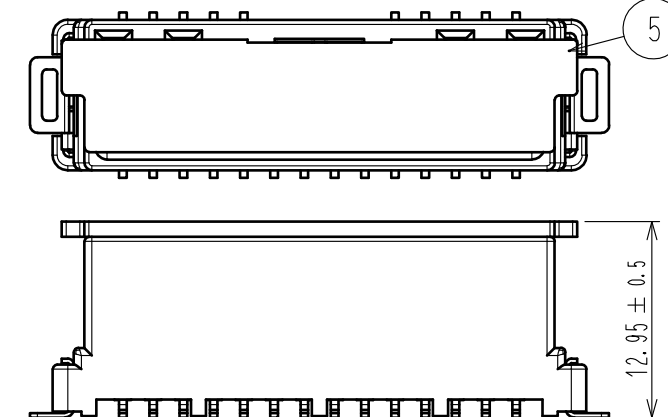

RECOMMENDED PCB PATTERN (2:1)

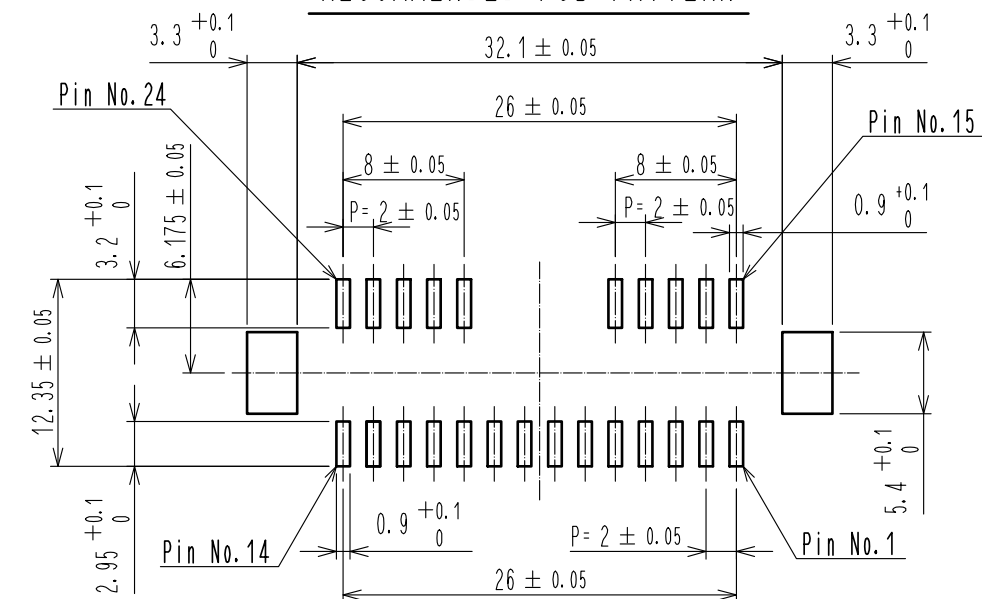

NOTE

1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW(REFER TO RIGHT FIG.)


REFLOW HEATING:FAR-INFLARED, IN THE AIR OR NITROGEN
REFLOW No.:MAX 2 TIMES
PEAK TEMPERATURE:250℃
ABOVE 230℃:20~40s
PREHEAT:150~180℃ (60~120s)

2. SOLDERING TEMPERATURE:280~300℃(MAX 2s)

3. COPLANARITY OF LEADS SHALL BE UNDER 0.1mm.

4. RECOMMENDED THICKNESS FOR PC BOARD IS 1.6mm.

5. RECOMMENDED THICKNESS FOR SOLDER PASTE IS 0.15mm.


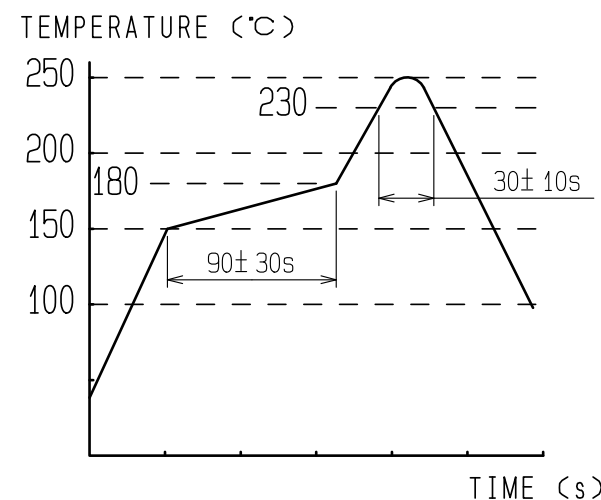


4	BRASS	TIN PLATING	8	PS	REEL
3	BRASS	CONTACT : GOLD PLATING LEAD : TIN PLATING	7	PET	COVER TAPE
2	BRASS	CONTACT : GOLD PLATING LEAD : TIN PLATING	6	PS	EMBOSSED CARRIER TAPE
1	PPS	BLACK UL94V-0	5	PA	MILKEY WHITE
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : HH. TSUKUMO	20200321	DRAWING NO.	EDC-169119-57-00
		CHECKED : HH. TSUKUMO	20200321	PART NO.	GT8EH-24DP-2V(57)
		DESIGNED : DONGCHAN KIM	20200221	CODE NO.	CL758-1020-8-57
		DRAWN : YK. MITSUISHI	20200220		


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKAGING SPECIFICATION


EMBOSED CARRIER TAPE DIMENSION (2:1)

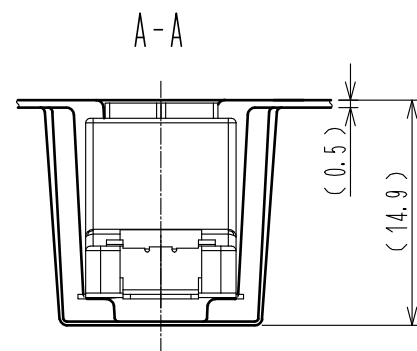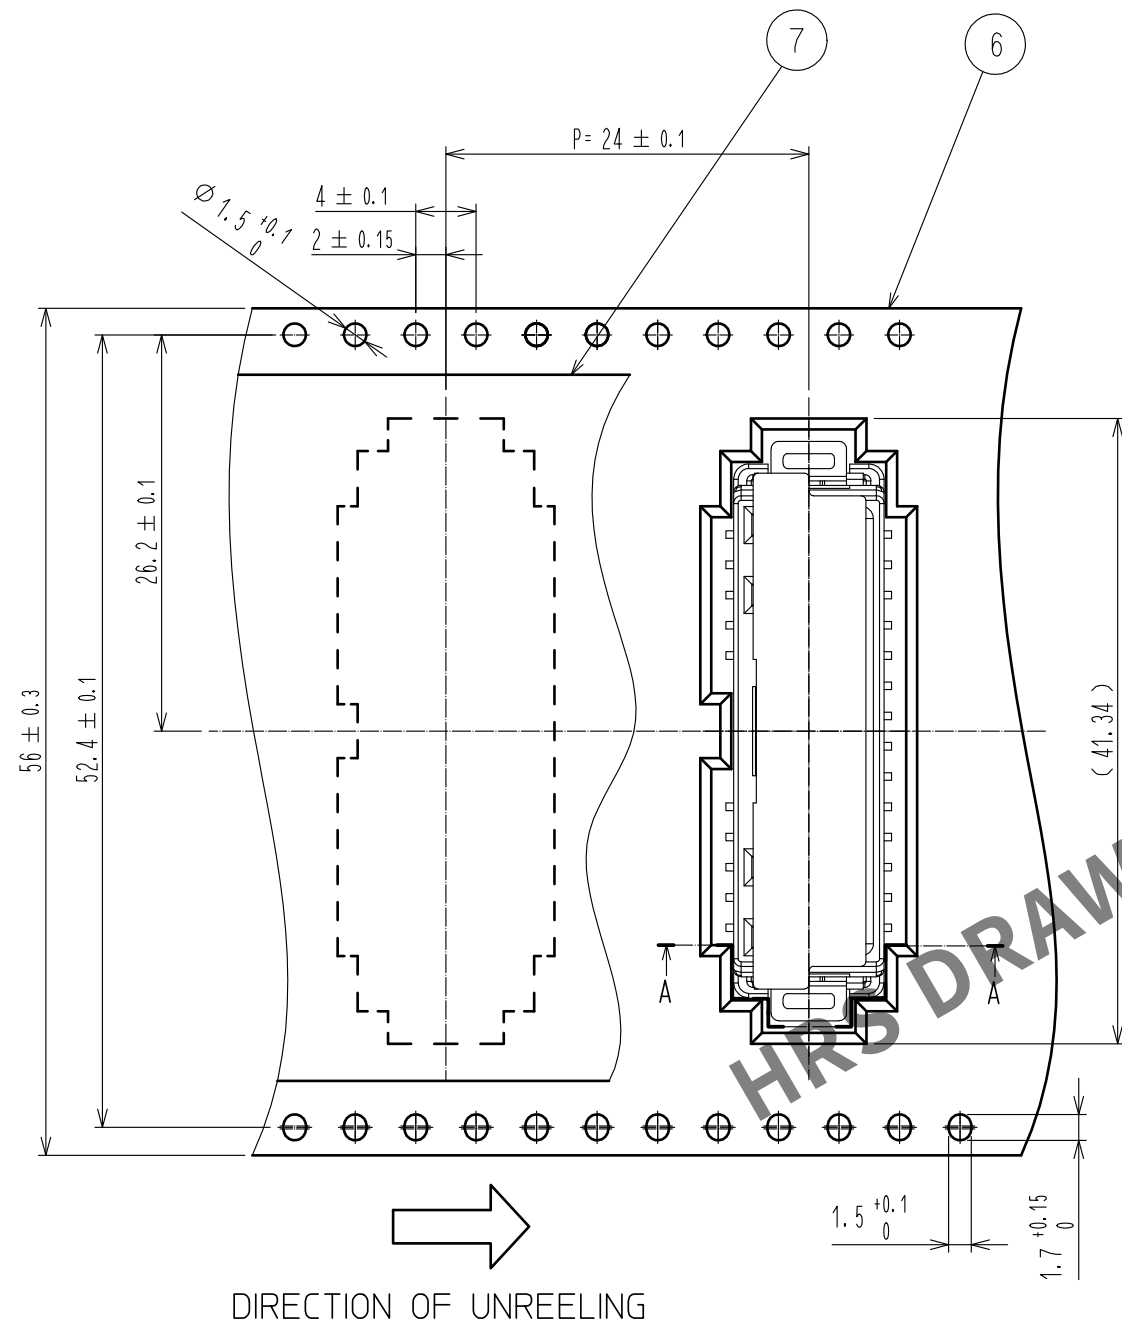

REEL, LEADER AND TRAILER DIMENSION (FREE)

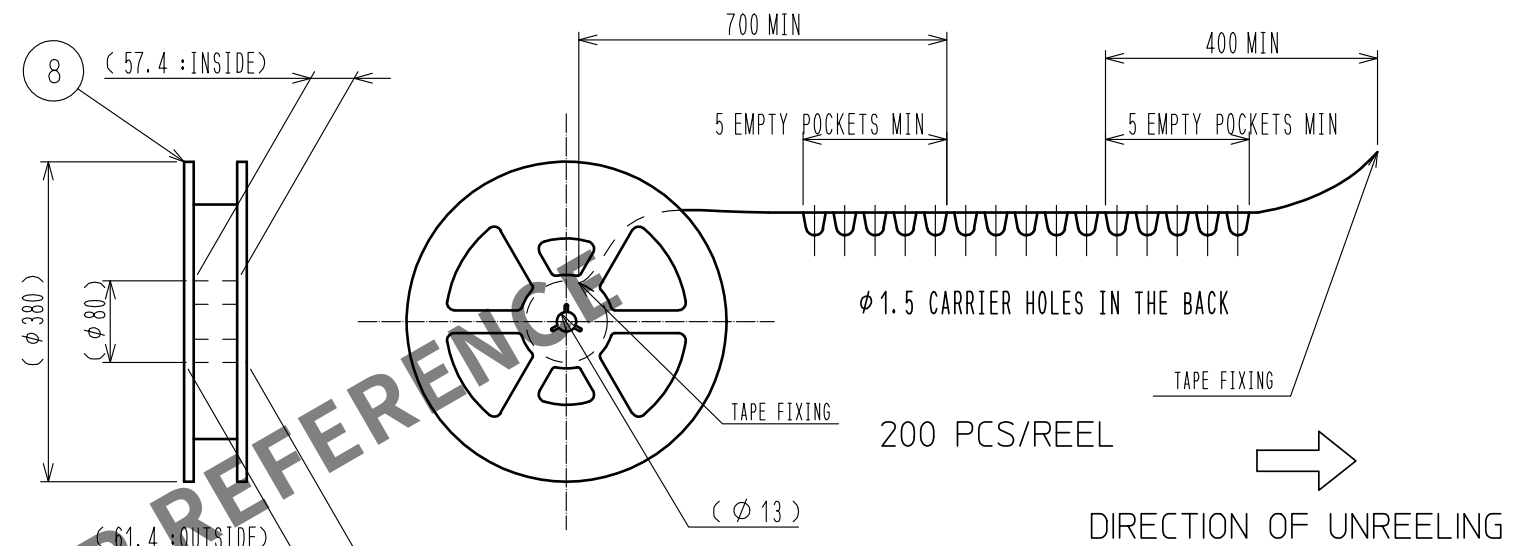

CARDBOARD BOX SIZE (FREE)

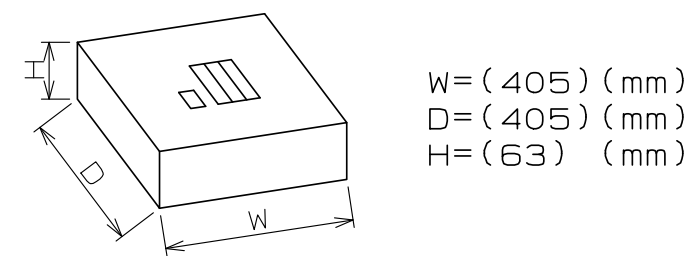

HRS

DRAWING NO.	EDC-169119-57-00
PART NO.	GT8EH-24DP-2V(57)
CODE NO.	CL758-1020-8-57

2/2