
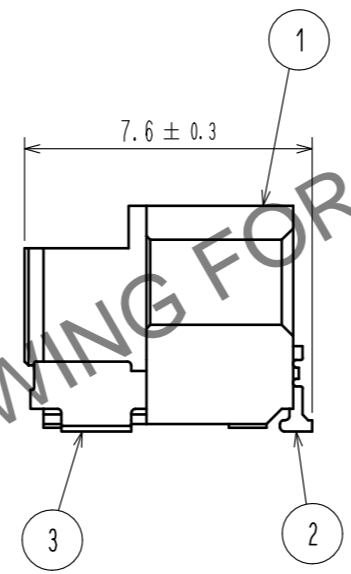
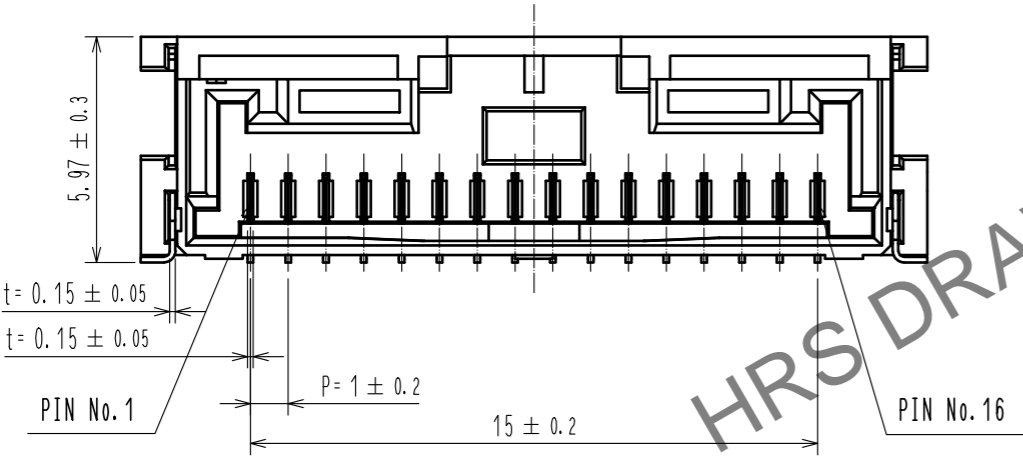
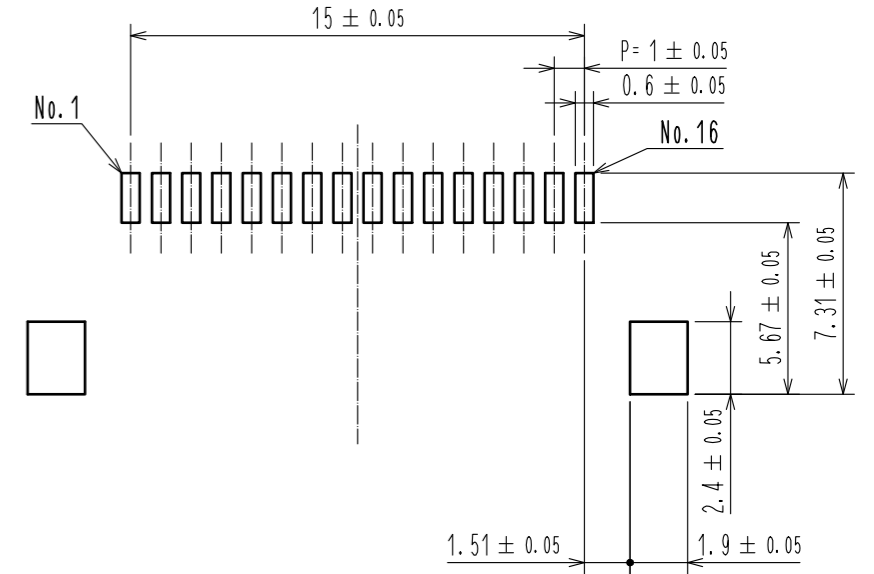
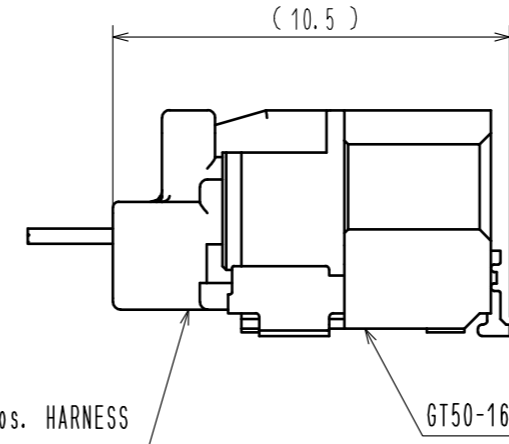


Sep.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT


MATED CONNECTORS (FREE)

RECOMMENDED PCB PATTERN (FREE)
OPEN AREA RATIO : 100%

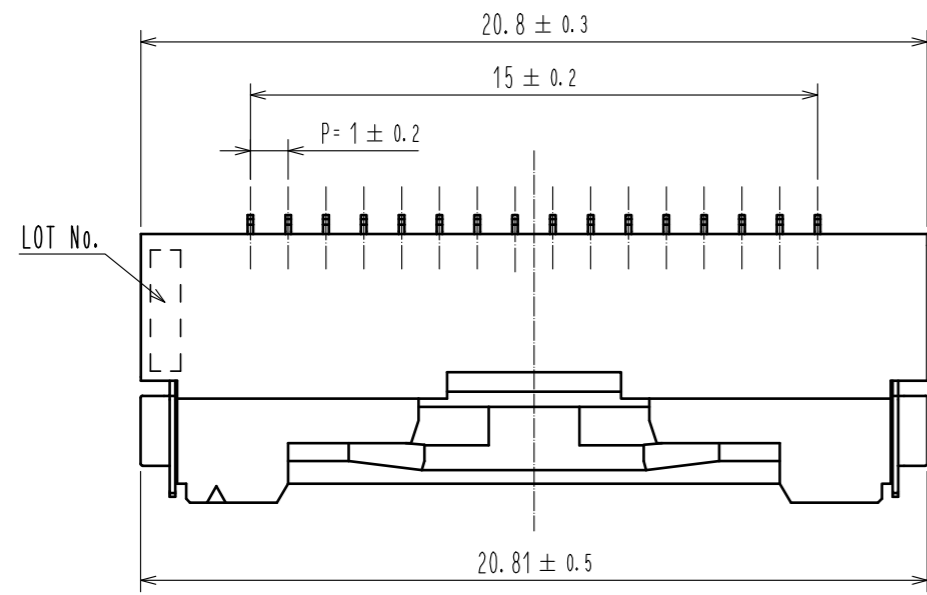

HRS DRAWING FOR REFERENCE

- NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.)
USED REFLOW SYSTEM : IR IN THE AIR OR NITROGEN
NO. OF CYCLES : 2 MAX
PEAK : 250°C
OVER 230°C : 20~40s
PREHEAT : 150~180°C
90~120s
2. TEMPERATURE FOR SOLDERING IRON : 280~300°C WITHIN 2s
3. CO-PLANARITY : 0.1mm MAX
4. RECOMMENDED SOLDER THICKNESS : 0.10mm

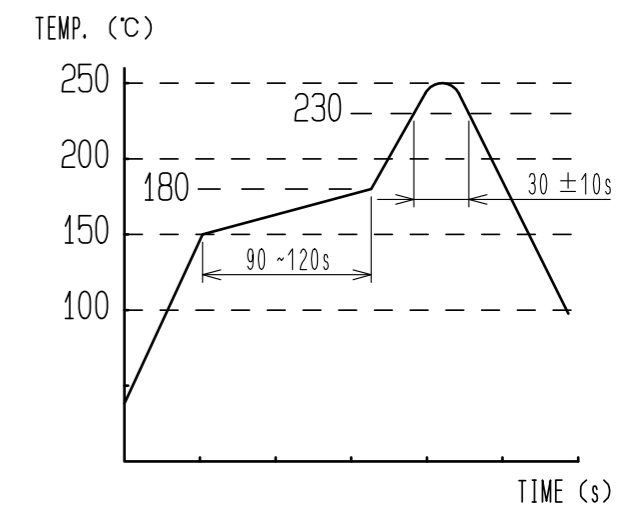

3	BRASS	TIN PLATING	6	PS	
2	BRASS	Au PLATING	5	POLYESTER	
1	LCP	BLACK	4	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	5 : 1	COUNT	1
DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
DIS-T-00010987			YT. TAKANASHI	OM. MIYAMOTO	20210903
APPROVED : HK. UMEHARA 20201224			DRAWING NO. EDC-392595-00-00		
CHECKED : OM. MIYAMOTO 20201224			PART NO. GT50-16P-1H		
DESIGNED : YT. TAKANASHI 20201222			CODE NO. CL0760-1012-0-00		
DRAWN : YT. TAKANASHI 20201222			1/2		

Sep.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE (FREE)

△ REEL DIMENSION

IDENTIFICATION TAG

φ1.5 送り穴奥

PACKING STYLE DRAWING

PULLING OUT DIRECTION

PRODUCTS DIRECTION

FIXING EMBOSSED CARRIER TAPE

400mm MIN
EMPTY POCKETS

160mm MIN
EMPTY POCKETS

(50.4 : WIDE OF OUTSIDE)

φ1.5 CARRIER HOLES AT FRONT




FIXING EMBOSSED CARRIER TAPE

(44.4 : WIDE OF INSIDE)

1000 PCS/REEL

CARDBOARD DIMENSION

W=(405) (mm)
D=(405) (mm)
H=(51) (mm)

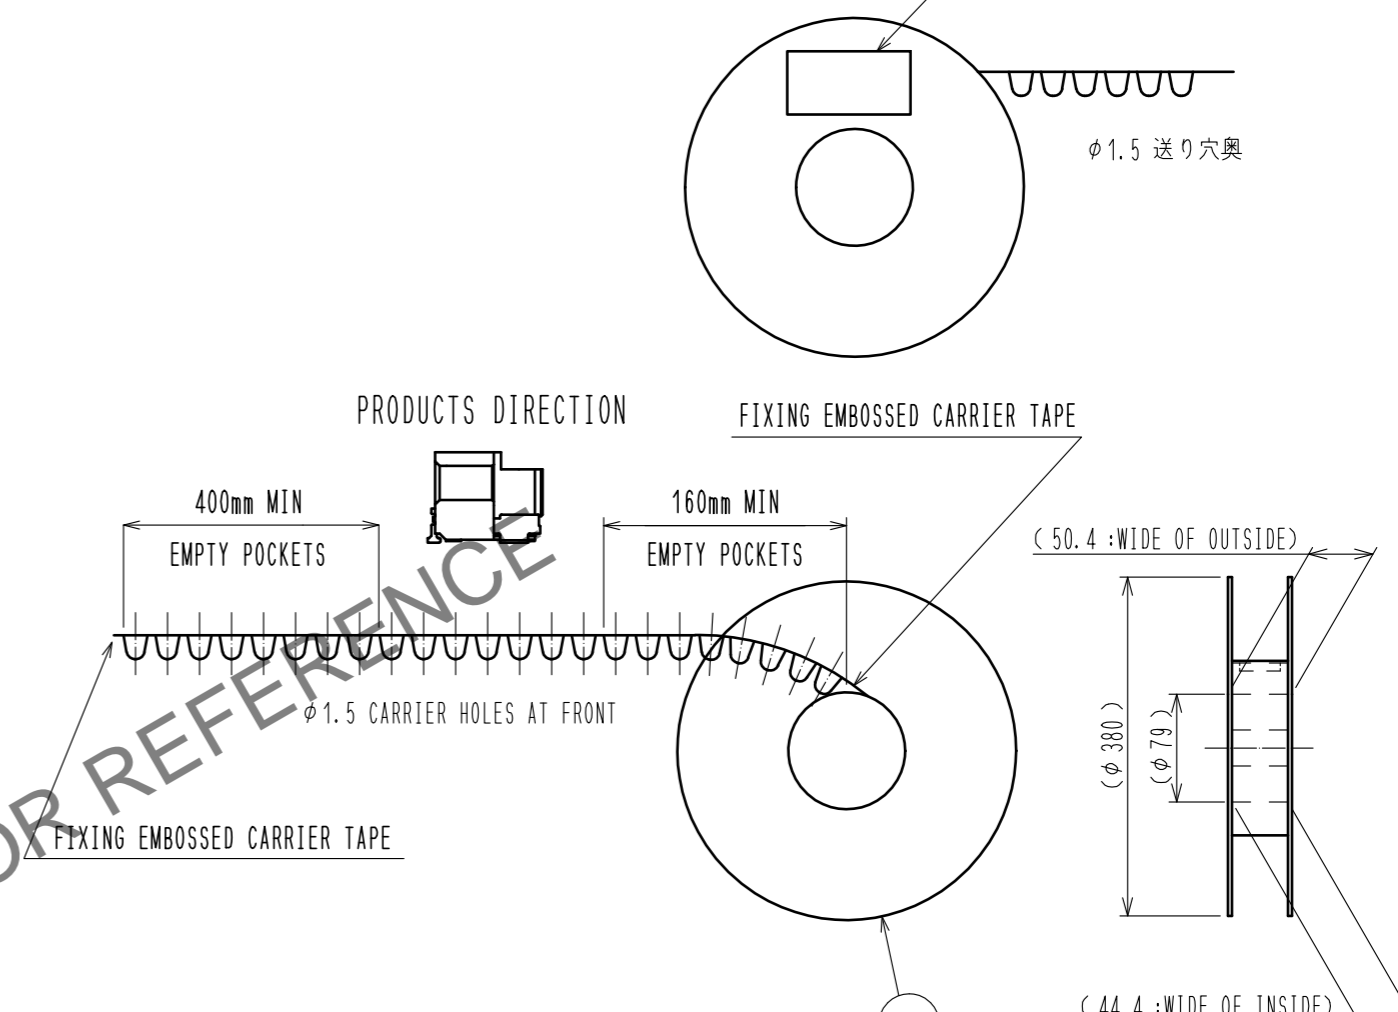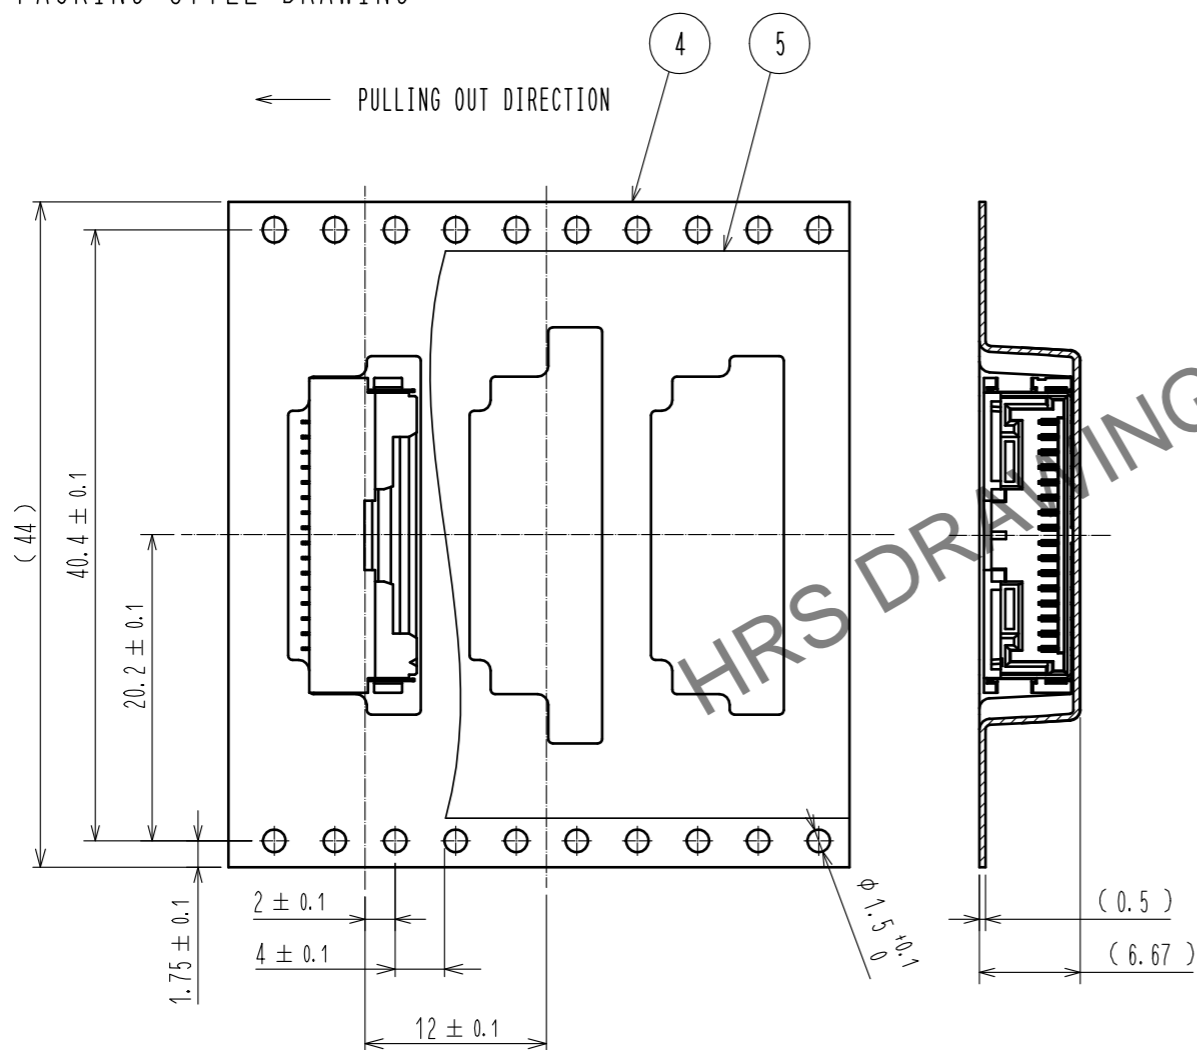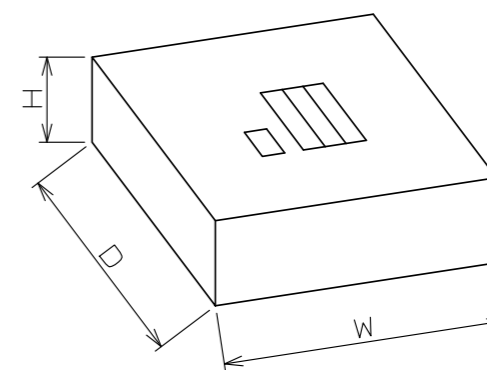

HRS	DRAWING NO.	EDC-392595-00-00	△ 2/2
	PART NO.	GT50-16P-1H	
	CODE NO.	CL0760-1012-0-00	