

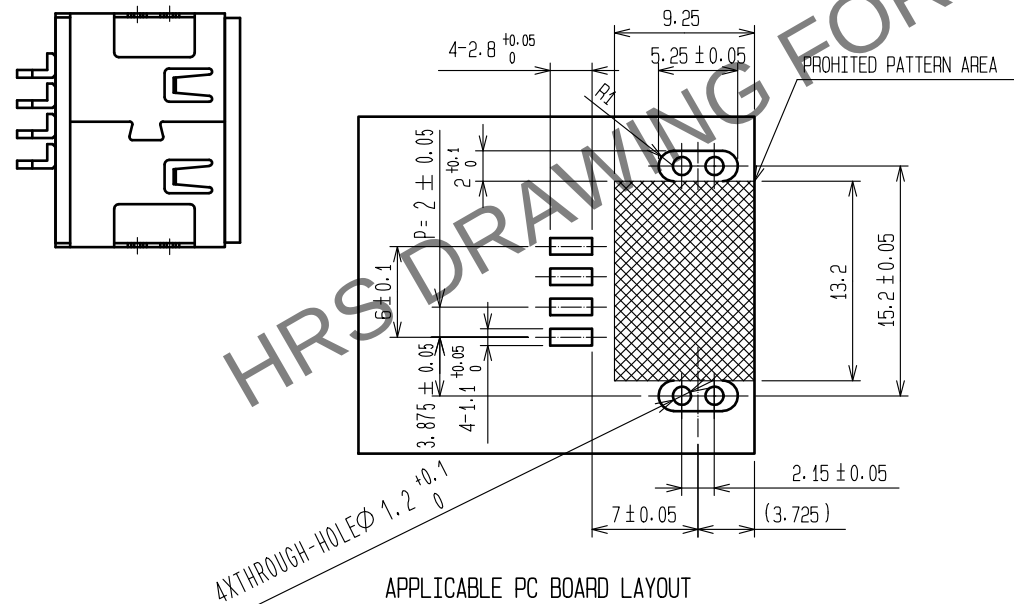
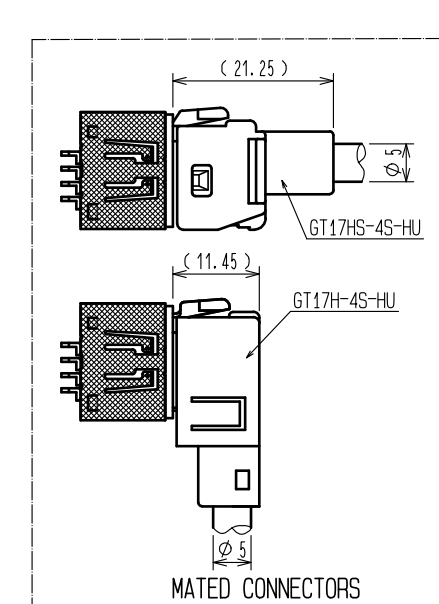


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RoHS, ELV COMPLIANT

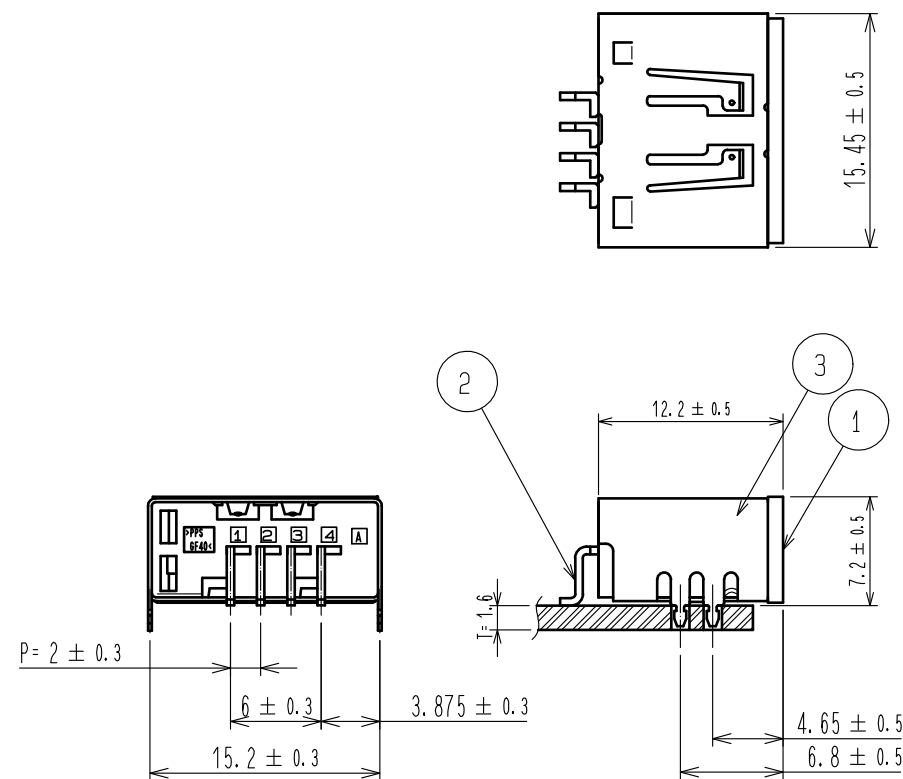


RECOMMENDED REFLOW PROFILE

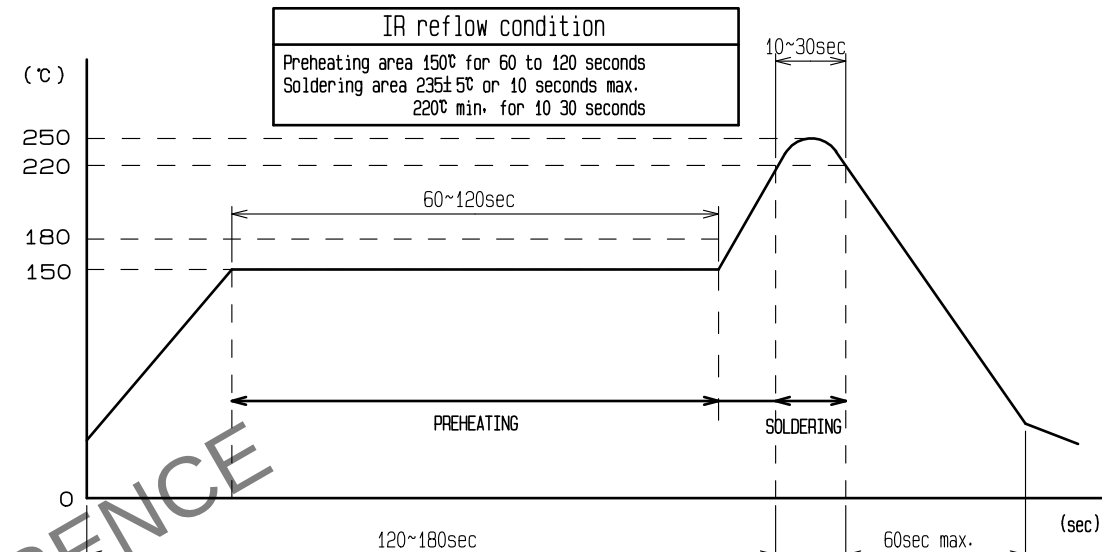

Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.
Note2. The temperature indicates the board surface temperature on the connector lead area.

PACKAGEING STYLE

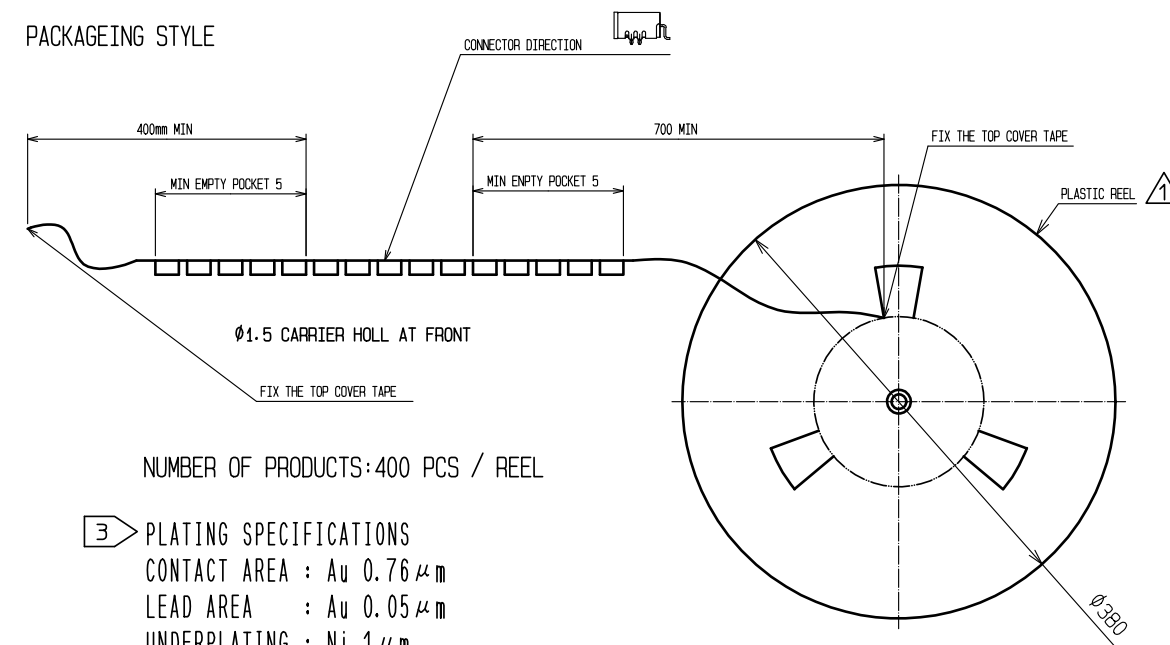

NUMBER OF PRODUCTS: 400 PCS / REEL

3 PLATING SPECIFICATIONS
CONTACT AREA : Au $0.76 \mu\text{m}$
LEAD AREA : Au $0.05 \mu\text{m}$
UNDERPLATING : Ni $1 \mu\text{m}$

CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY	CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN	CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN	CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE
MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE

2	BRASS	3		4			
1	PPS		LIGHT GRAY	3	COPPER ALLOY		Sn $1.0 \mu\text{m}$
NO.	MATERIAL		FINISH . REMARKS	NO.	MATERIAL		FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006444	DESIGNED KK. FURUKAWA	CHECKED EJ. WAKATSUKI	DATE 20200910
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA 20151007		DRAWING NO. EDC-166354-01-00			
		CHECKED : KI. HIROKAWA 20151007		PART NO. GT17H-4P-2H(C01)			
		DESIGNED : TK. SUZUKI 20151007		CODE NO. CL767-0083-3-01			
		DRAWN : TK. SUZUKI 20151007		1/1			