

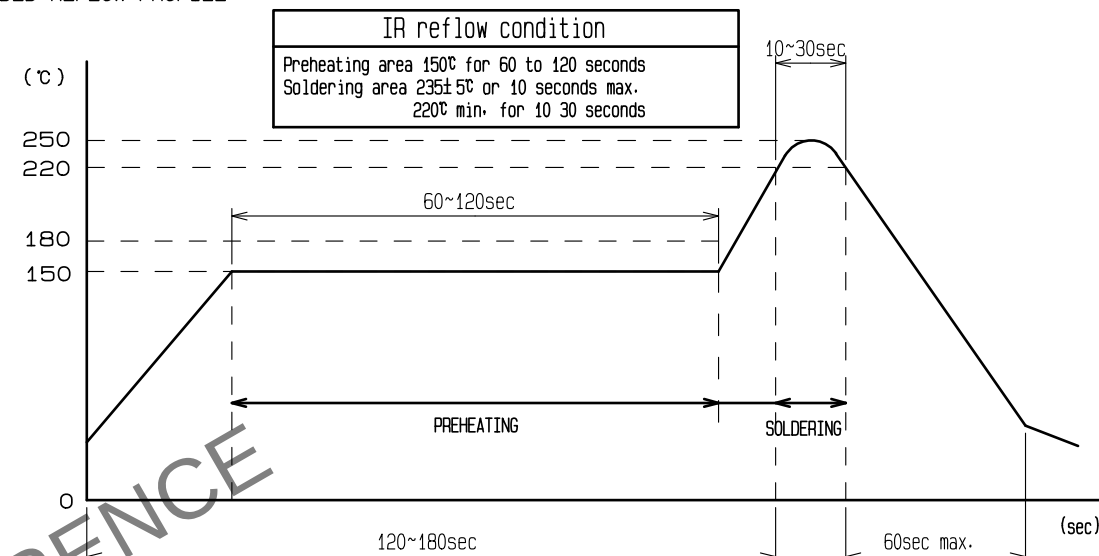
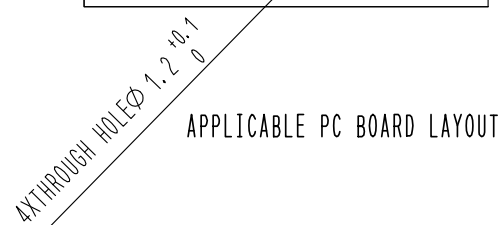

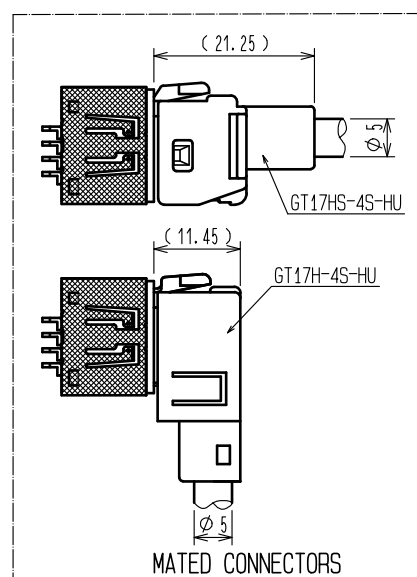
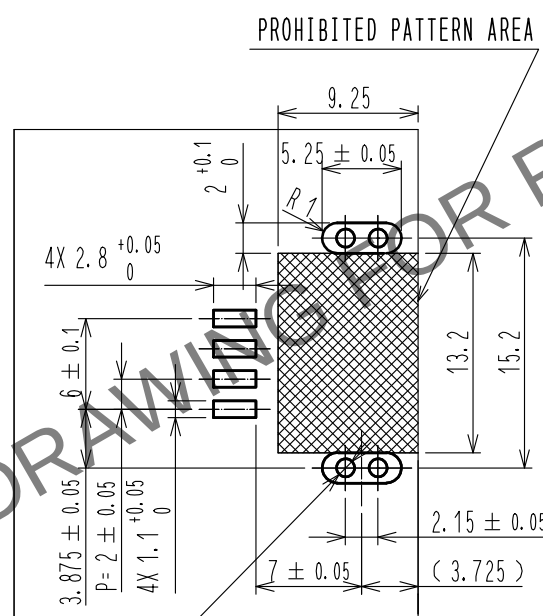
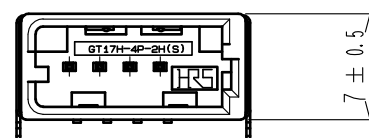
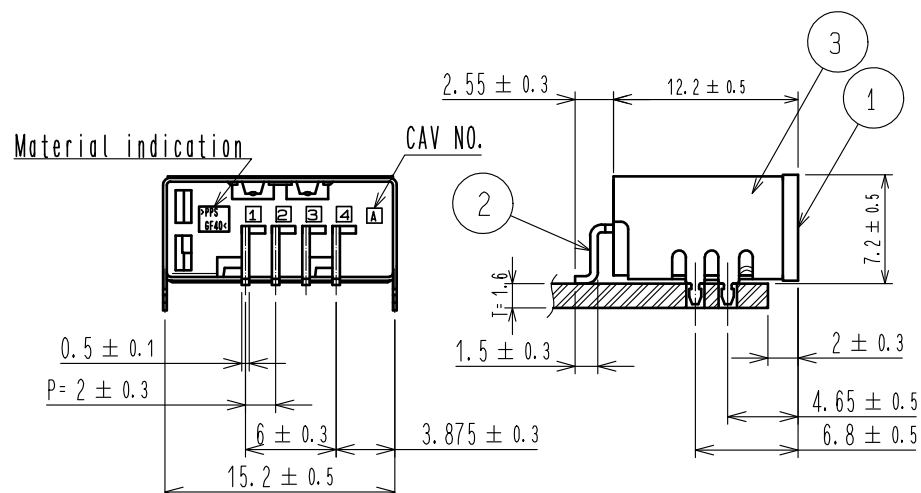





Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.
Note2. The temperature indicates the board surface temperature on the connector lead area.

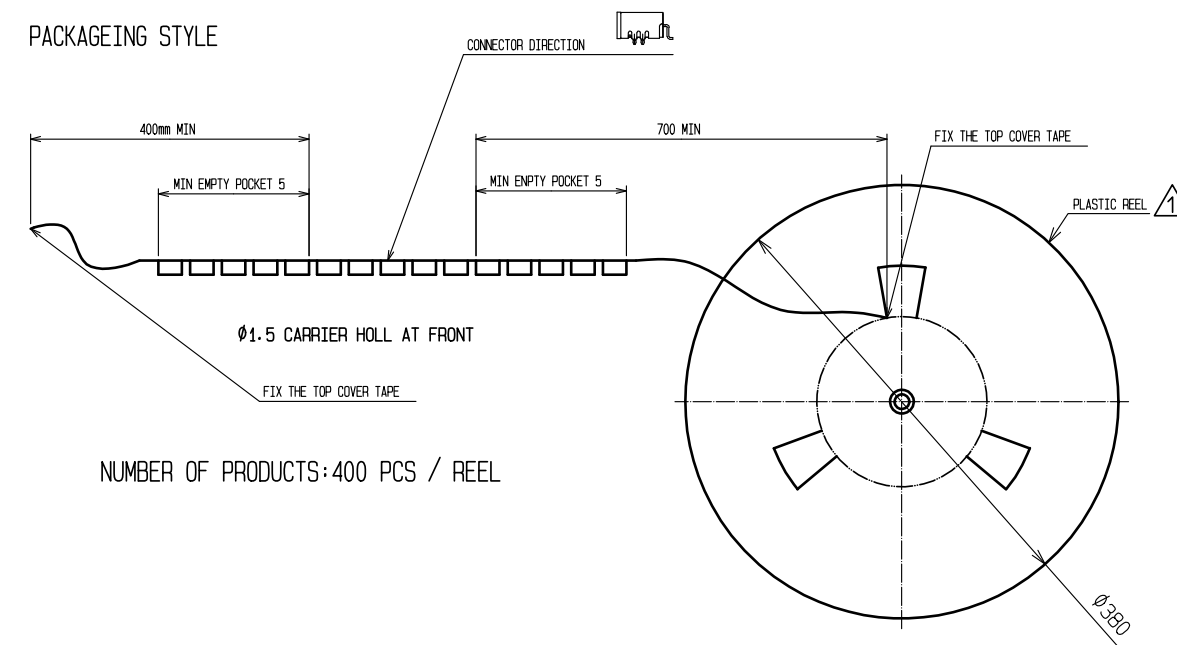

			
CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY	CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN	CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN	CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE
MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE

2	BRASS	TIN PLATING		4		
1	PPS	LIGHT GRAY		3	COPPER ALLOY	Sn PLATING 1#m
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
		2 : 1		1	DIS-T-00006678	TS. KUBOTA	EJ. WAKATSUKI	20200901	
		APPROVED : KI. HIROKAWA 20200326					DRAWING NO. EDC-166354-55-00		
		CHECKED : EJ. WAKATSUKI 20200325					PART NO. GT17H-4P-2H(55)		
		DESIGNED : TS. KUBOTA 20200325					CODE NO. CL767-0083-3-55		
HRSHIROSE ELECTRIC CO., LTD.		DRAWN : YK. MITSUISHI 20200219					 		