

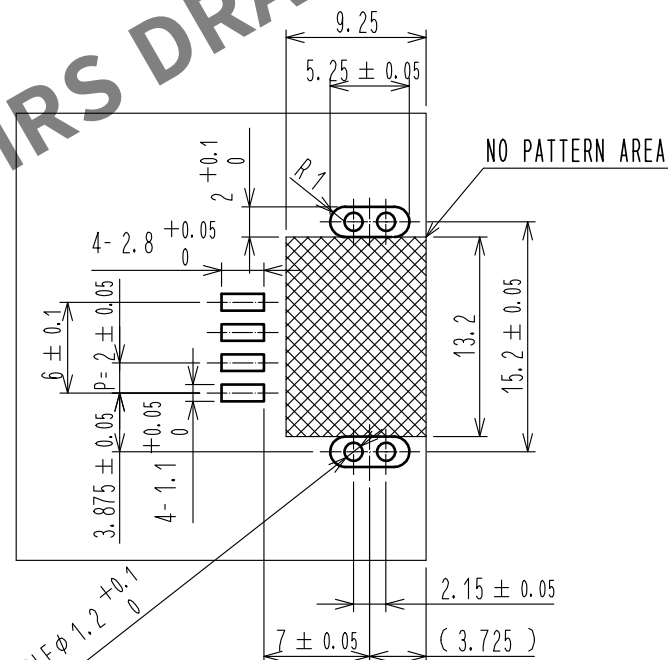
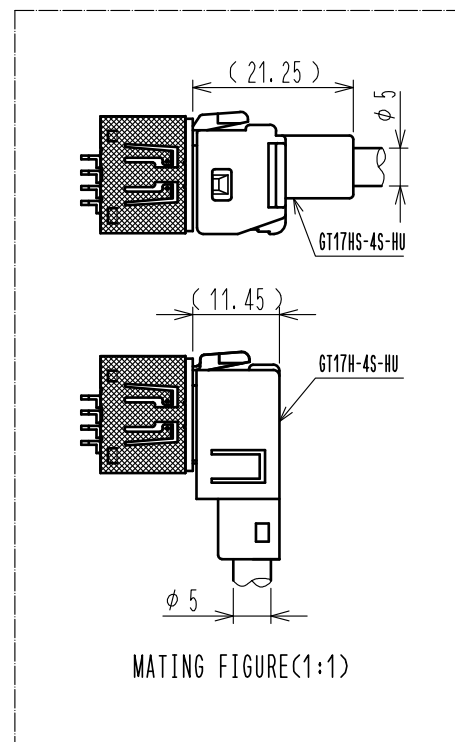


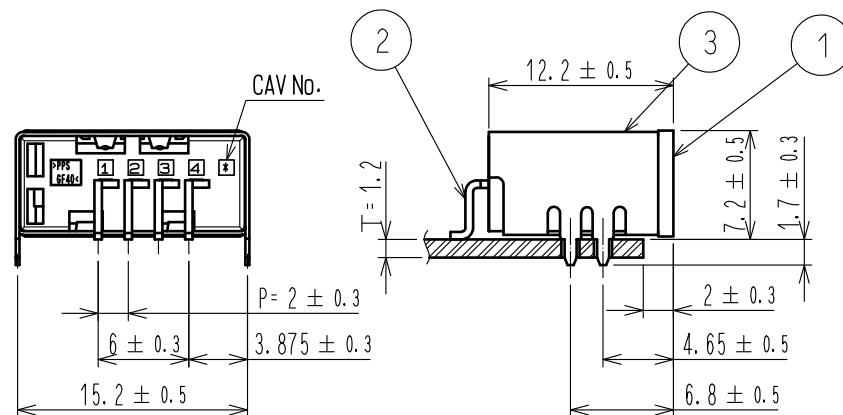
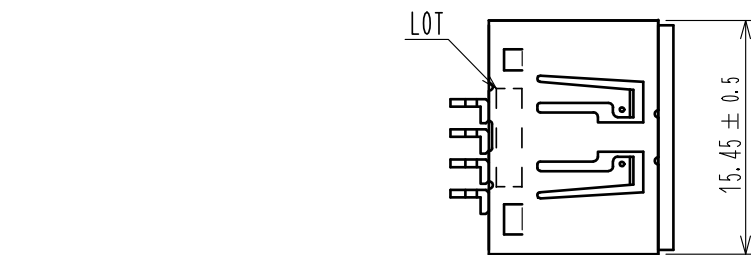


ELV. RoHS COMPLIANT

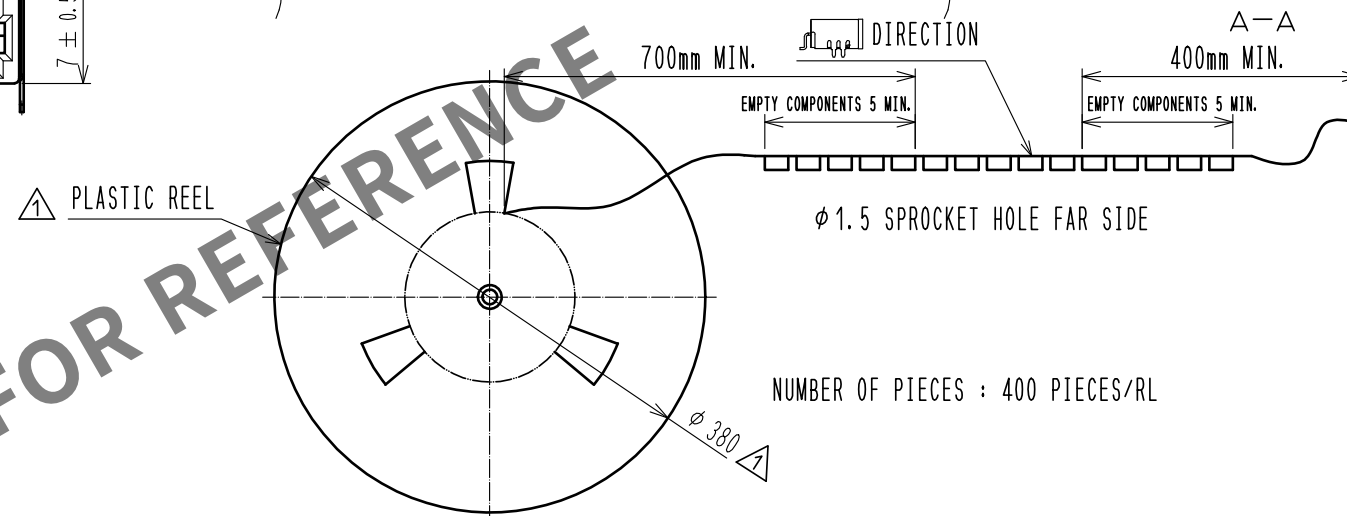


RECOMMENDED PATTERN
RECOMMENDED BOARD THICKNESS T=1.2mm

EMBOSSED CARRIER TAPE PACKAGING

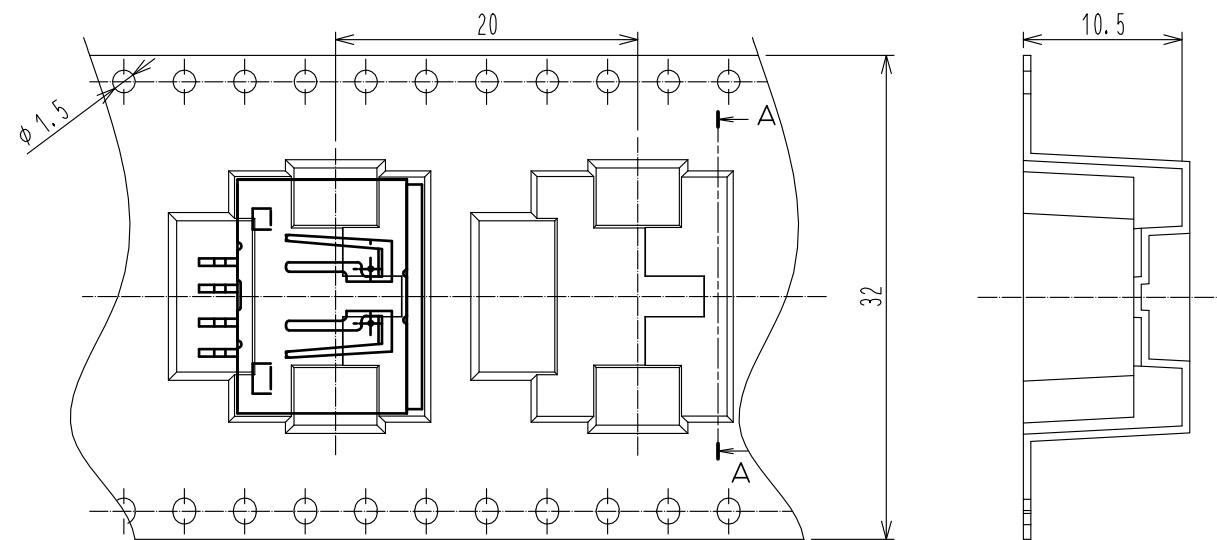

REFERENCE REFLOW PROFILE

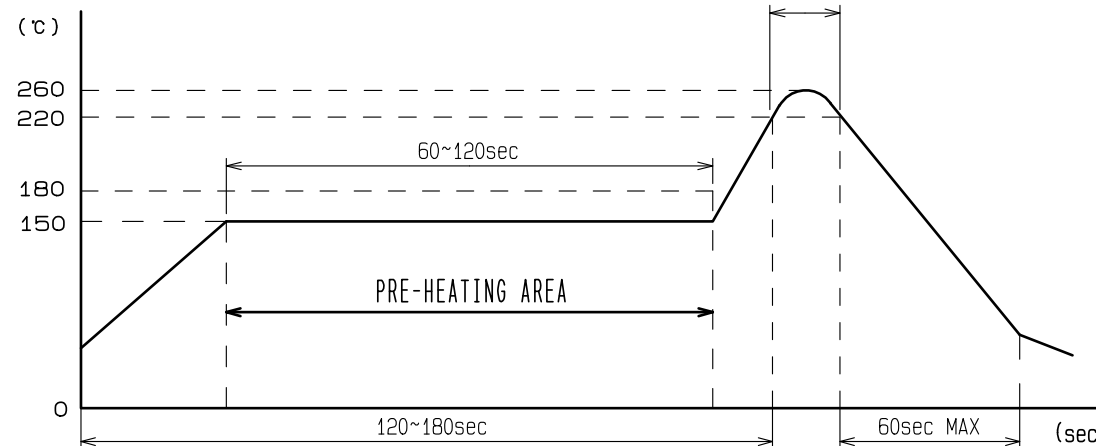

NOTE 1 REFLOW IS POSSIBLE TO 2 TIMES
2 TEMPERATURE NEAR CONNECTOR LEAD

2	BRASS	TIN PLATING			
1	PPS	LIGHT GRAY	3	COPPER ALLOY	TIN PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-T-00006678	DESIGNED TS. KUBOTA
		APPROVED : KI. HIROKAWA	20200326	DRAWING NO.	EDC-166354-56-00
		CHECKED : EJ. WAKATSUKI	20200325	PART NO.	GT17H-4P-2H(56)
		DESIGNED : TS. KUBOTA	20200325	CODE NO.	CL767-0083-3-56
		DRAWN : YK. MITSUISHI	20200219		
		DATE	20200909		