

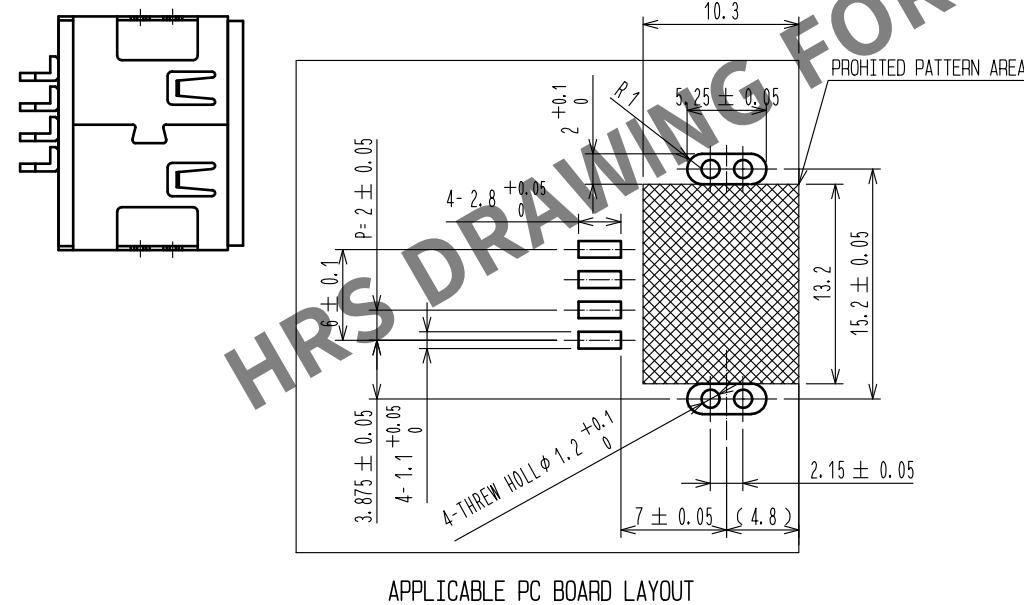
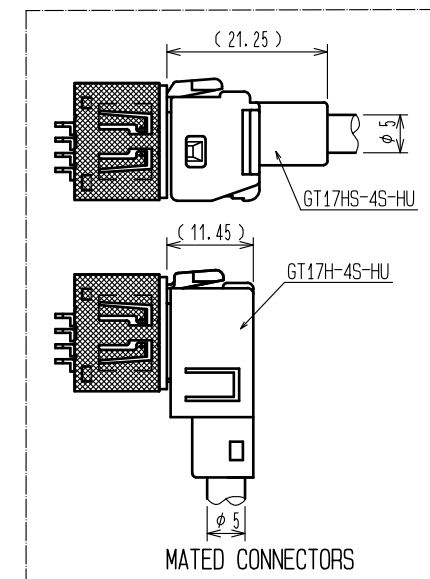


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RoHS, ELV COMPLIANT

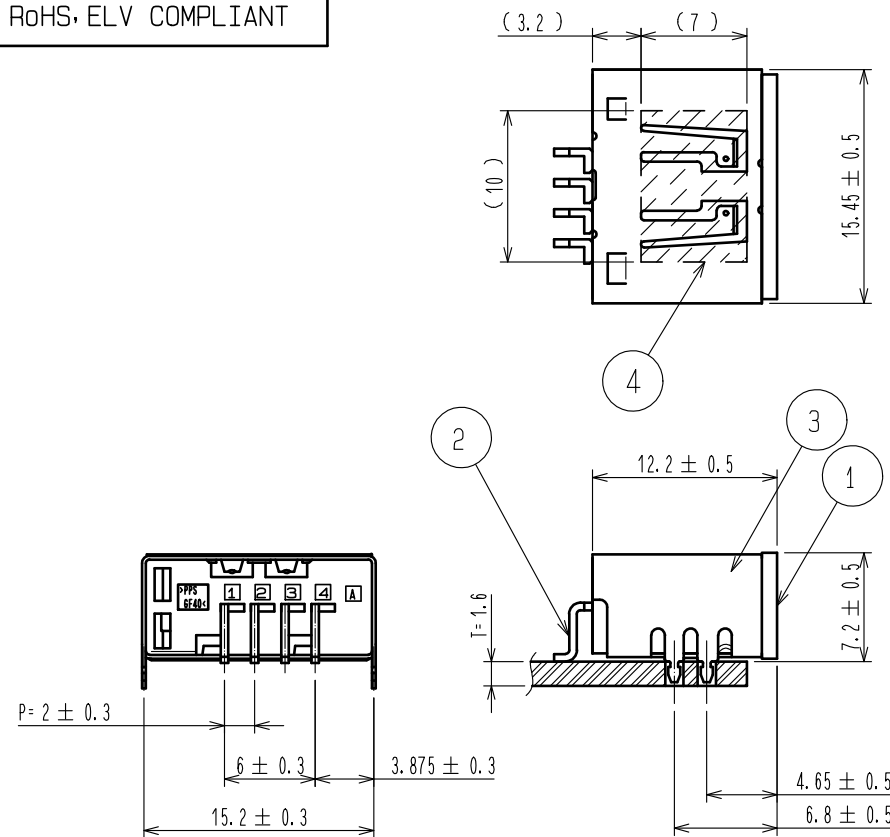






RECOMMENDED REFLOW PROFILE

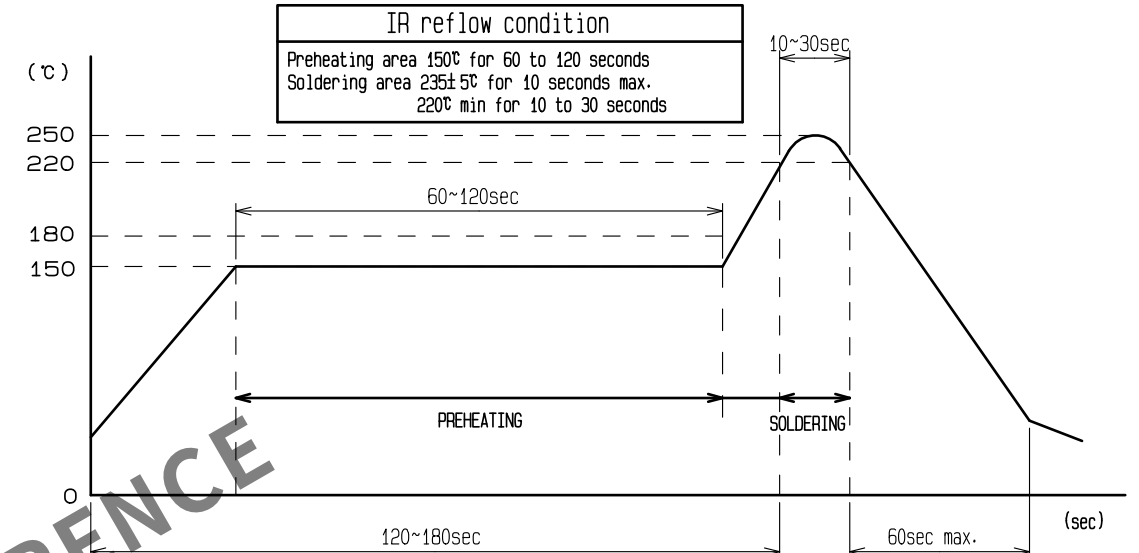


Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.
Note2. The temperature indicates the board surface temperature on the connector lead area.

PACKAGEING STYLE

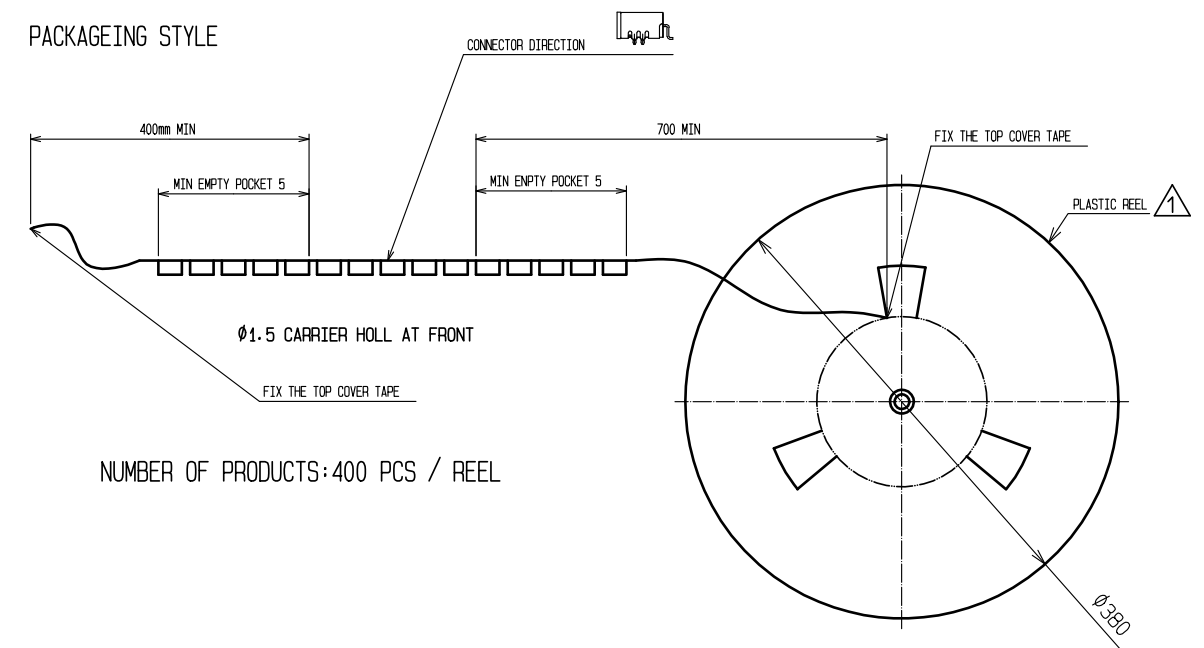

 CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	 CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	 CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	 CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE
--	--	---	--

2	BRASS	Ni 1μm + Sn PLATING 2μm		4	POLYIMIDE	PICK & PLACE TAPE				
1	PPS	LIGHT GRAY		3	COPPER ALLOY	Sn PLATING 1μm				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS				
UNITS mm				SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006678	DESIGNED TS. KUBOTA	CHECKED EJ. WAKATSUKI	DATE 20200909
 HIROSE ELECTRIC CO., LTD.		APPROVED : KI. HIROKAWA		20200331		DRAWING NO. EDC-166354-75-00				
		CHECKED : EJ. WAKATSUKI		20200327		PART NO. GT17H-4P-2H(75)				
		DESIGNED : TS. KUBOTA		20200325		CODE NO. CL767-0083-3-75				
		DRAWN : YK. MITSUISHI		20200311		 				