



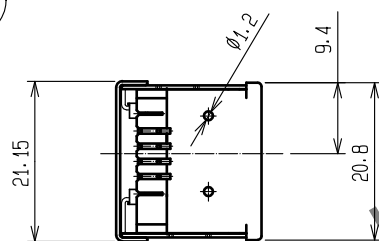
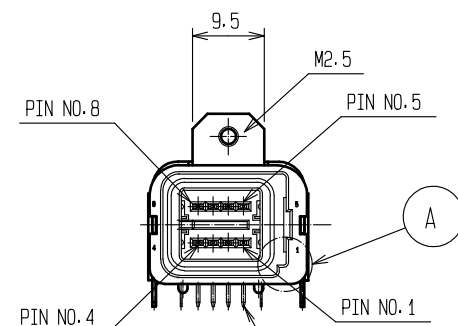


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



ELV. RoHS COMPLIANT

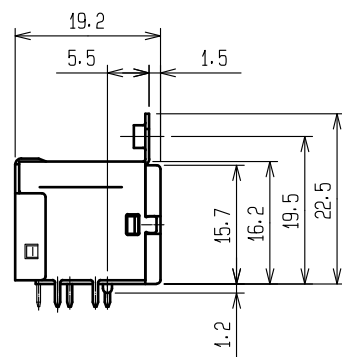

A (4 : 1)

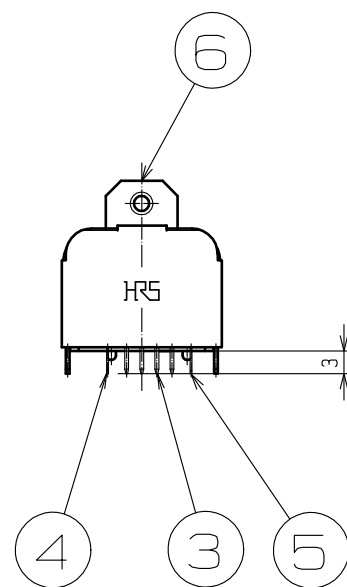


PC BOARD
(VIEW FROM CONNECTOR HEAD)

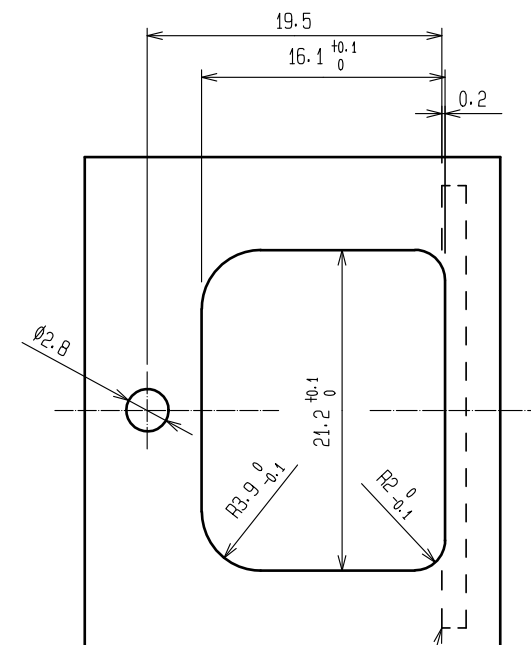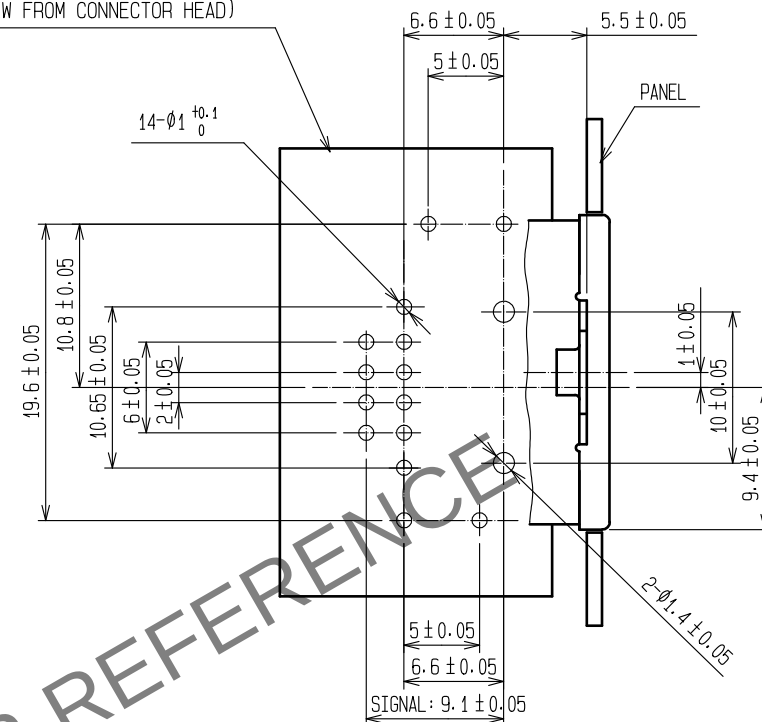


RECOMMENDED PANEL CUTOUT (2:1)

GROUND X 2 PIN

GROUND X 4 PIN

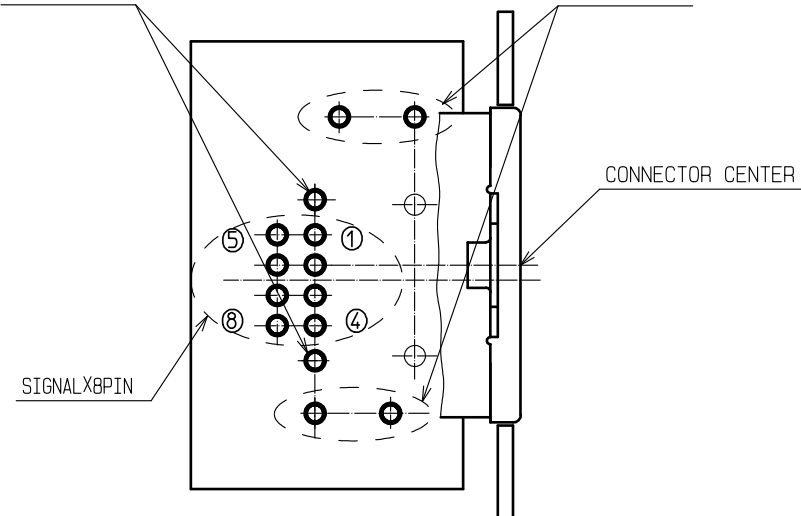

RECOMMENDED PC BOARD HOLE PATTERN (2:1)
VIEW FROM CONNECTOR HEAD

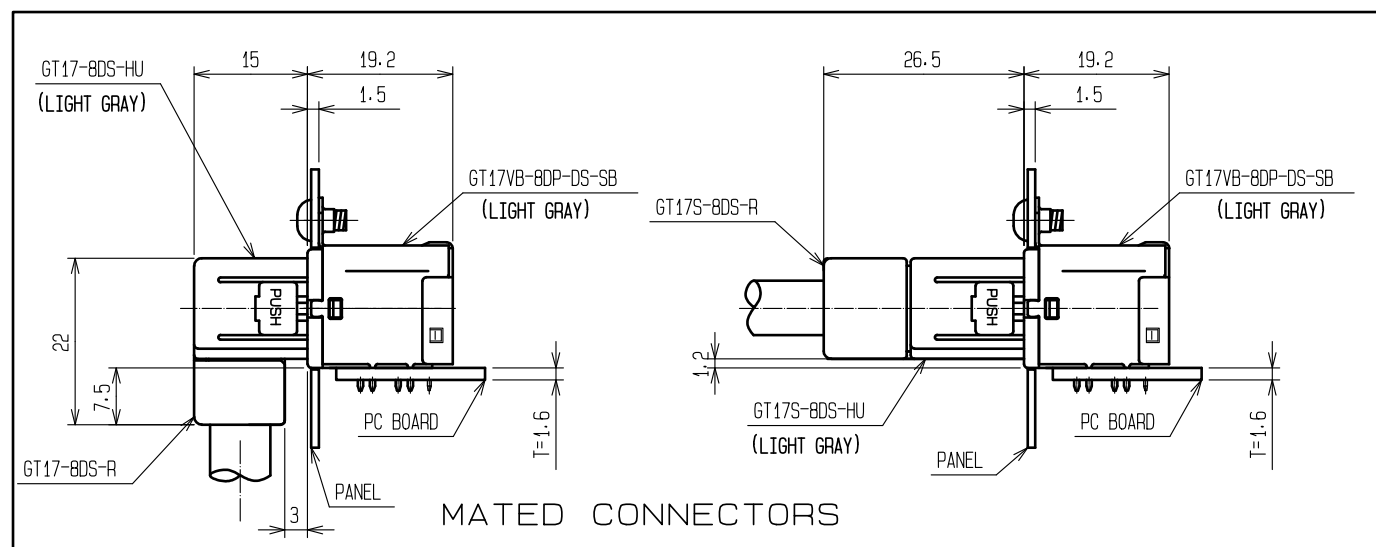

MATED CONNECTORS

3	BRASS	TIN PLATING . T=0.64	6	BRASS	TIN PLATING . T=0.5
2	BRASS	TIN PLATING . T=0.64	5	COPPER ALLOY	TIN PLATING . T=0.25
1	PBT	LIGHT GRAY	4	COPPER ALLOY	TIN PLATING . T=0.25
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 1 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : KI. HIROKAWA	20200326	DRAWING NO.	EDC-166544-55-00
		CHECKED : E.J. WAKATSUKI	20200325	PART NO.	GT17VB-8DP-DS-SB(55)
		DESIGNED : TS. KUBOTA	20200325	CODE NO.	CL767-0123-6-55
		DRAWN : YK. MITSUISHI	20200221		