

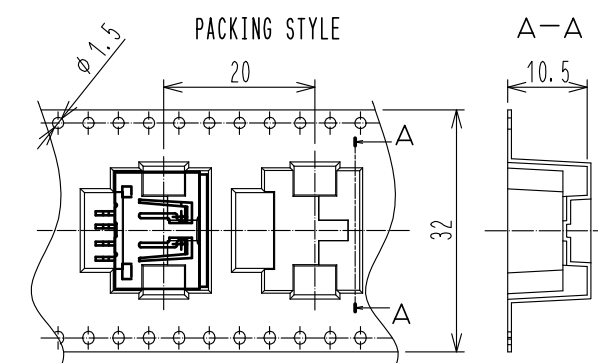
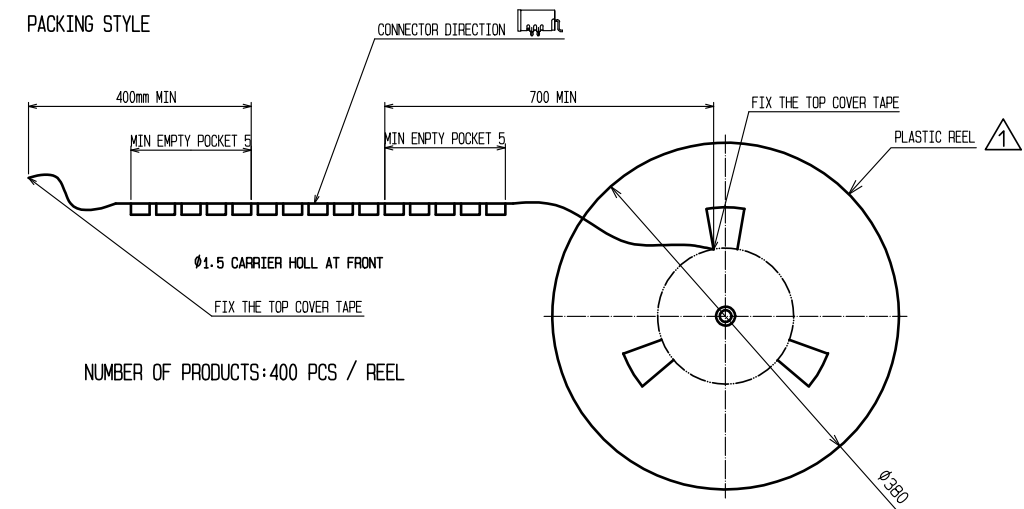


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RoHS, ELV COMPLIANT

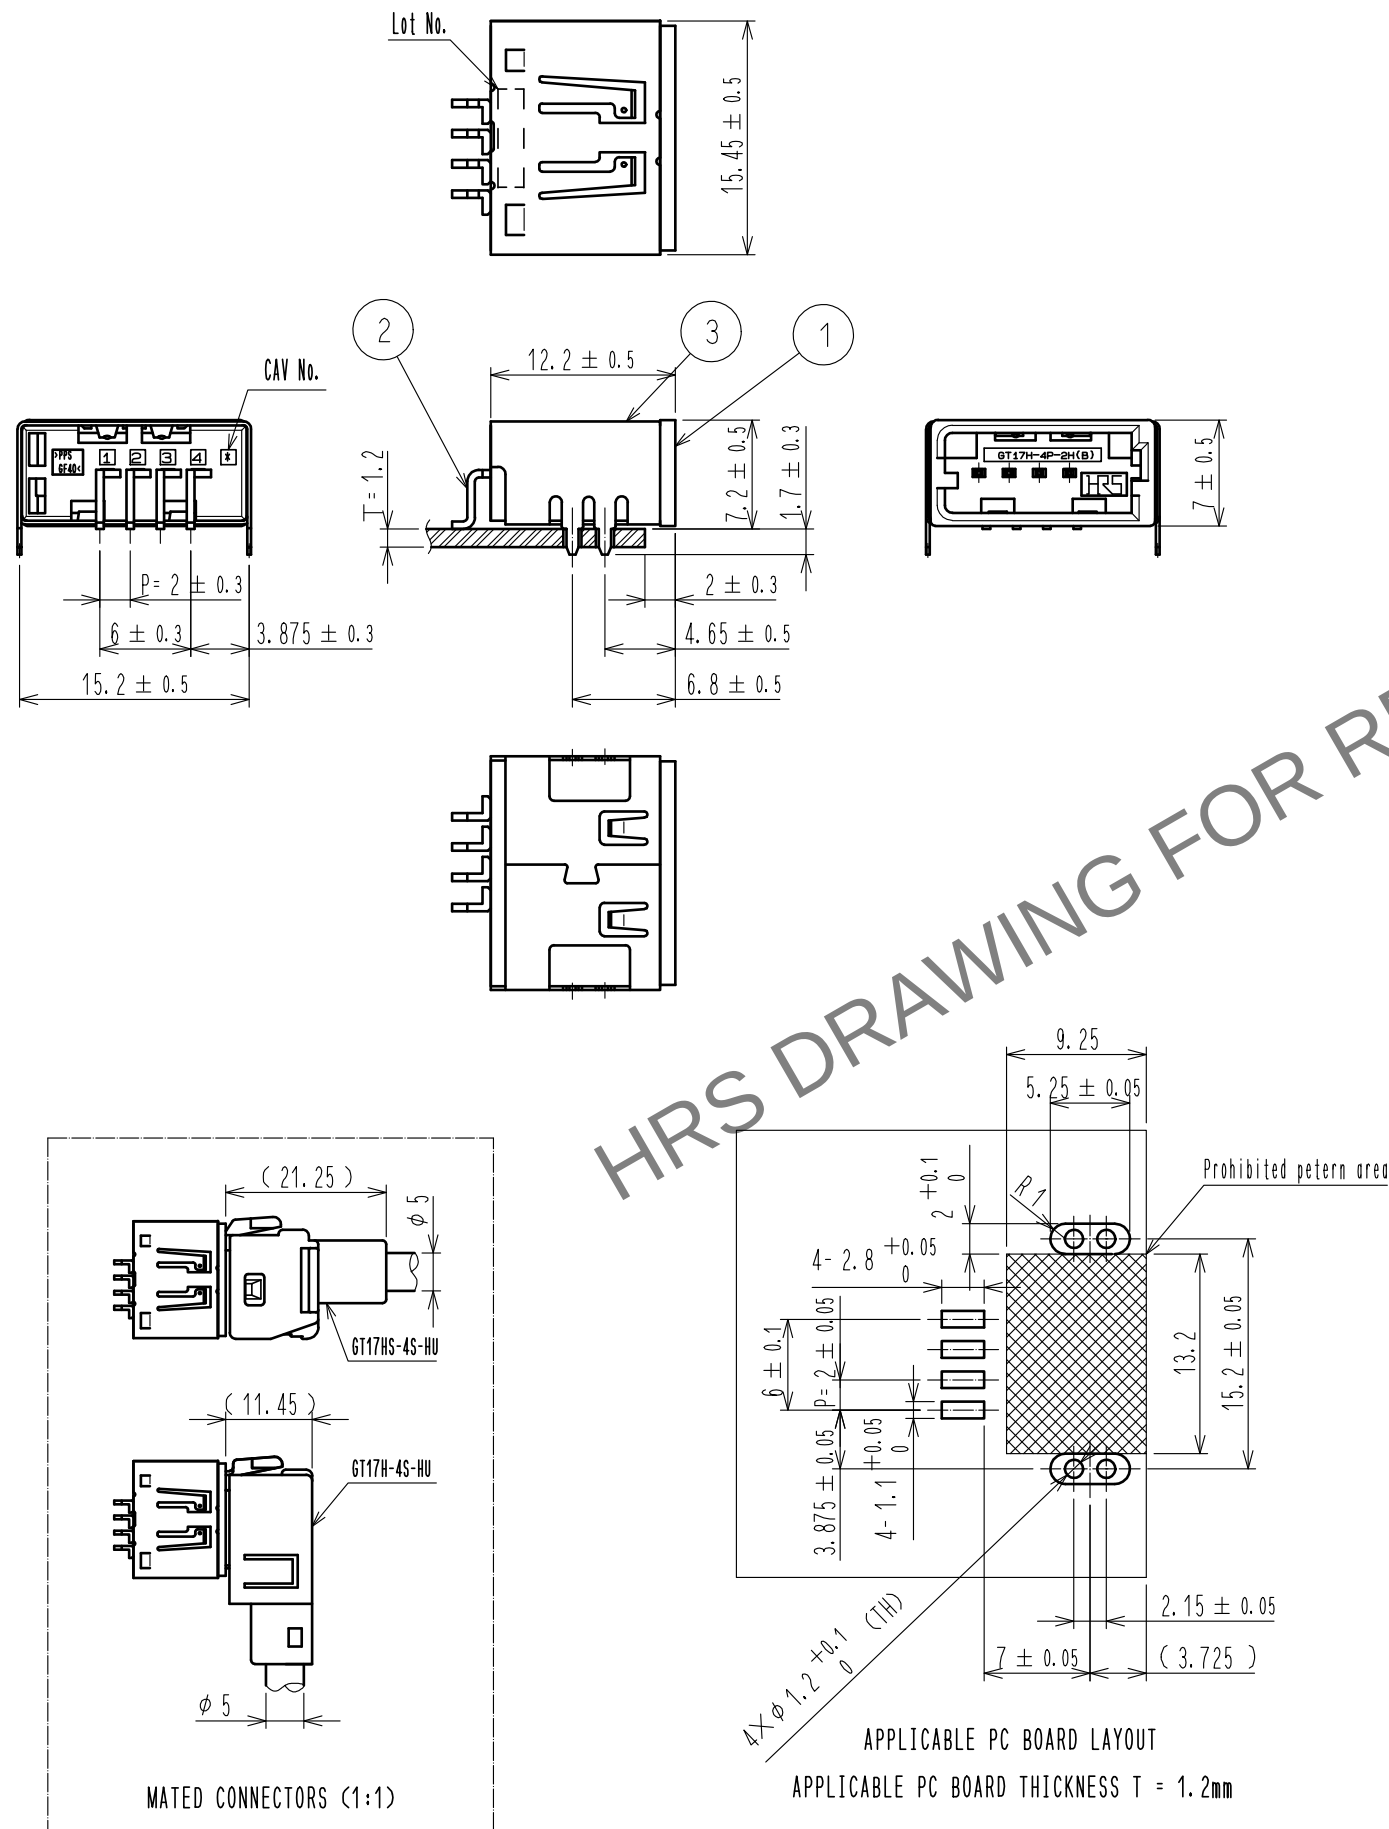


RECOMMENDED REFLOW PROFILE

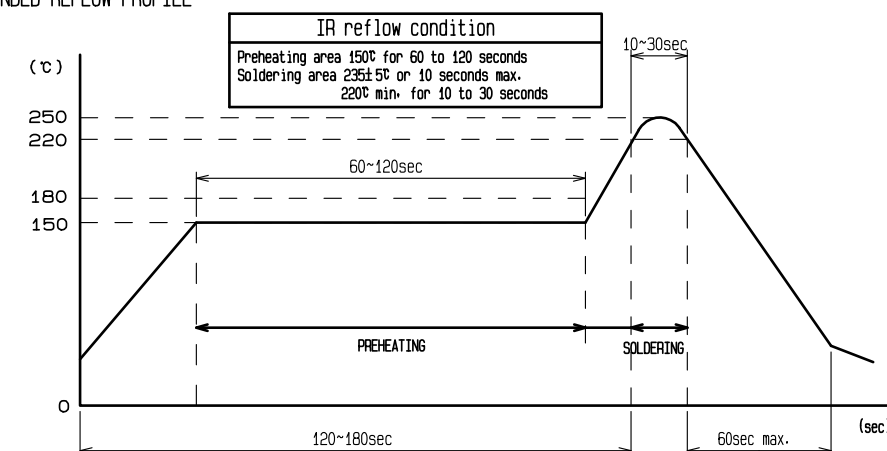

Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.

Note2. The temperature indicates the board surface temperature on the connector lead area.

2	BRASS	TIN PLATING						
1	PPS	GREEN		3	COPPER ALLOY	TIN PLATING		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm  HIROSE ELECTRIC CO., LTD.	 SCALE 2 : 1	 COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE	
		1	DIS-T-00006678		TS. KUBOTA	EJ. WAKATSUKI	20200909	
		APPROVED	: KI. HIROKAWA	20200326	DRAWING NO. EDC-166943-56-00			
		CHECKED	: EJ. WAKATSUKI	20200325	PART NO. GT17H-4P-2H(B)(56)			
		DESIGNED	: TS. KUBOTA	20200325	CODE NO. CL767-0171-9-56			
DRAWN	: YK. MITSUISHI	20200219	 					