
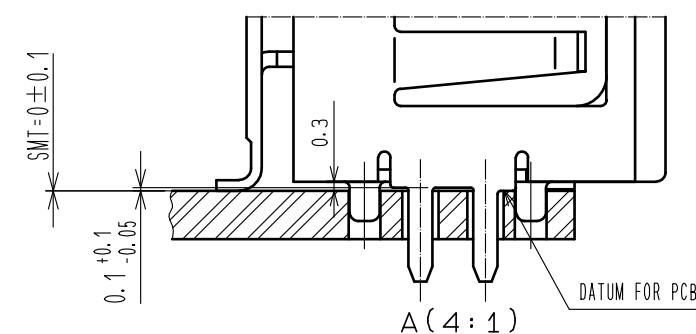
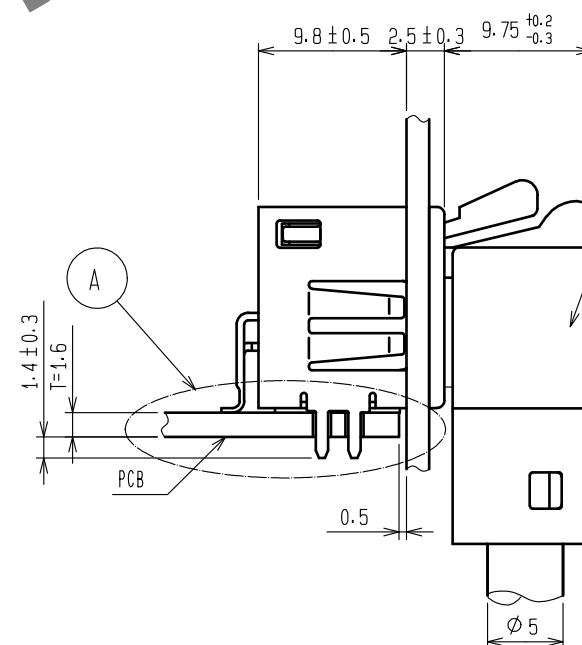
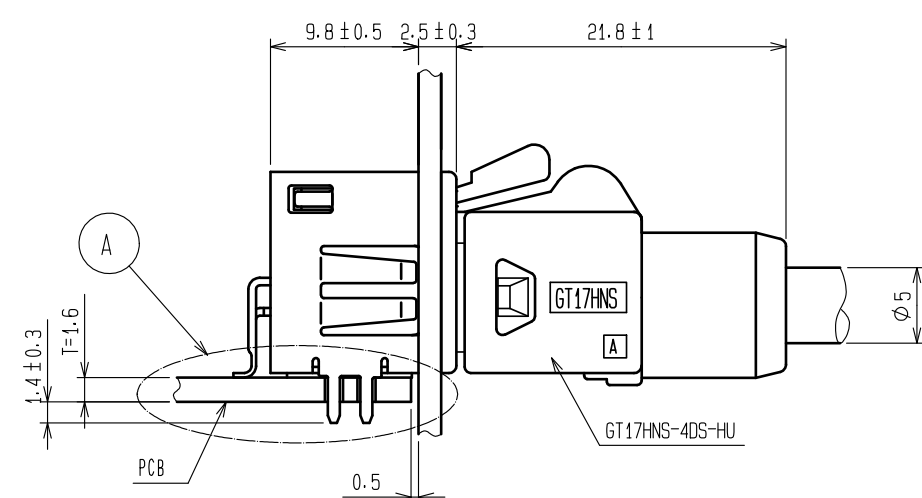
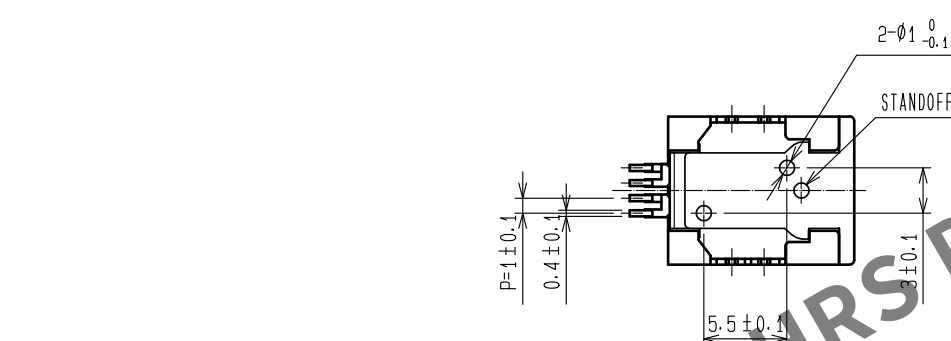
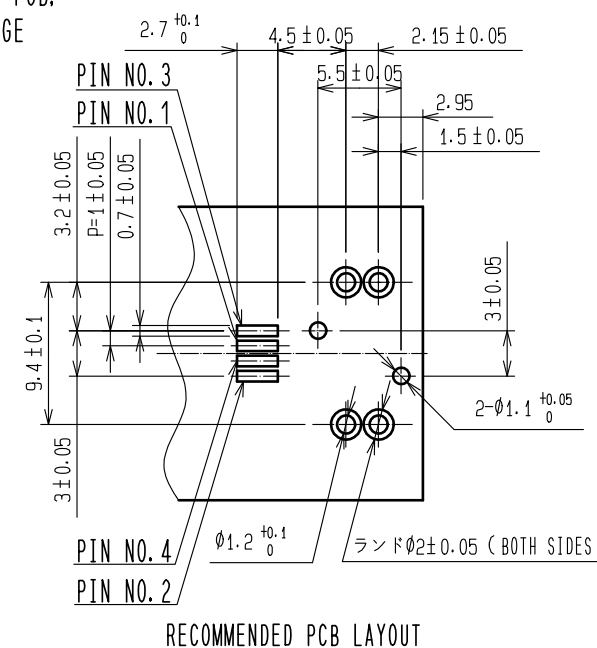
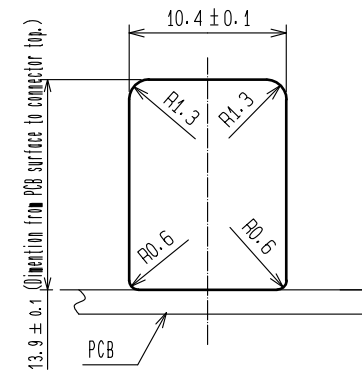
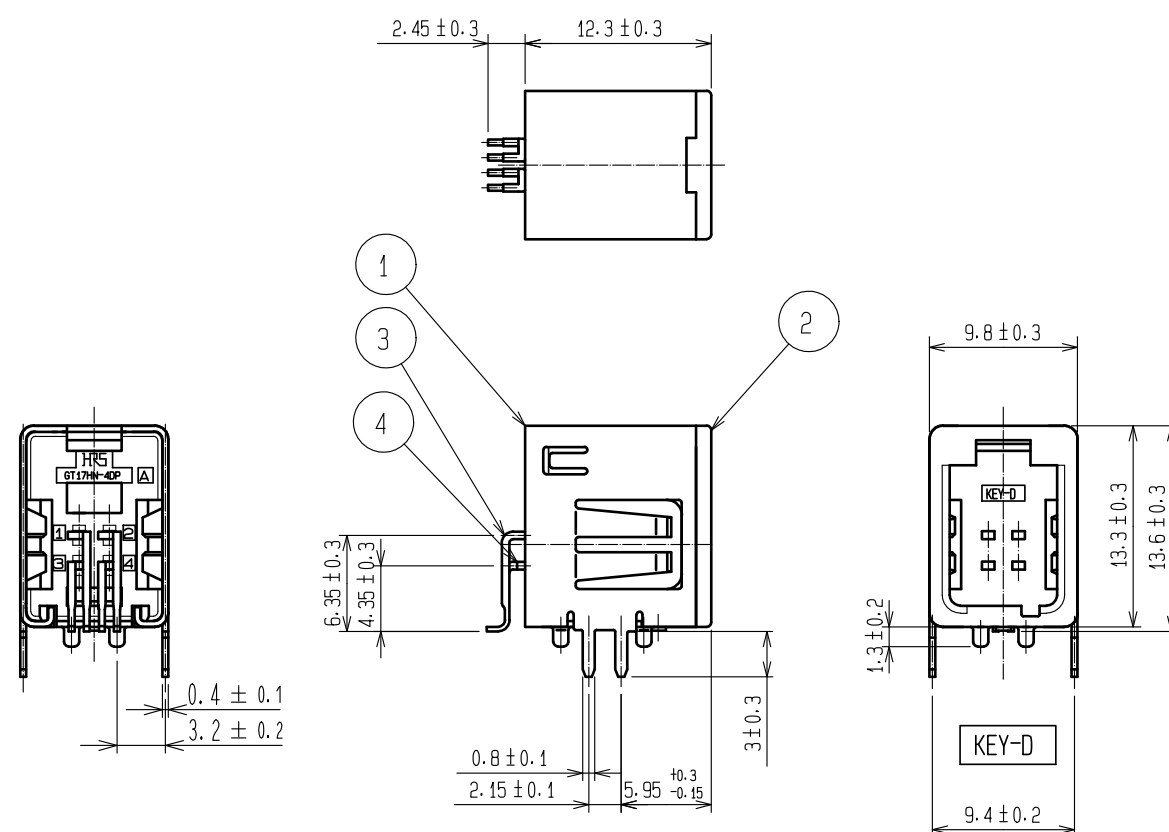


6) FOR THE PREVENTION EXCESSIVE STRESS FOR CONNECTOR AND PCB, WE RECOMMEND ADDITIONAL SUPPORT MECHANISM IF THE FLANGE WAS ELIMINATED.

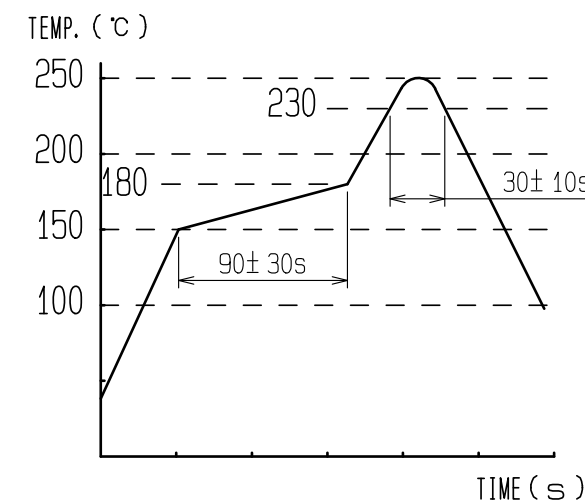

IN COMBINATION WITH STRAIGHT CONNECTOR

IN COMBINATION WITH RIGHT-ANGLE CONNECTOR

2	PPS	BLACK	5	PS	NATURAL
1	COPPER ALLOY	TIN PLATING	4	BRASS	TIN PLATING
			3	BRASS	TIN PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006678	DESIGNED TS. KUBOTA	CHECKED EJ. WAKATSUKI	DATE 2020090
 HIROSE ELECTRIC CO., LTD.	APPROVED : KI. HIROKAWA 20200409				DRAWING NO. EDC-168956-58-00			
	CHECKED : EJ. WAKATSUKI 20200408				PART NO. GT17HN-4DP-2H(D)(58)			
	DESIGNED : TS. KUBOTA 20200325				CODE NO. CL767-0276-7-58			
	DRAWN : YK. MITSUISHI 20200319							

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

