





May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

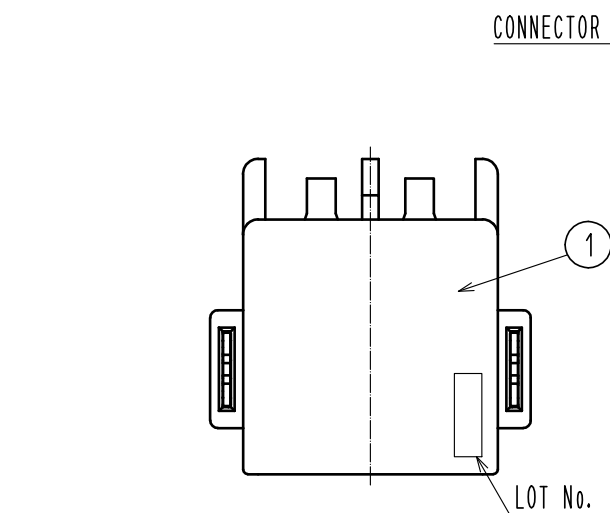


CONNECTOR MOUNTING SPACE

RECOMMENDED PCB PATTERN(T=1.6)

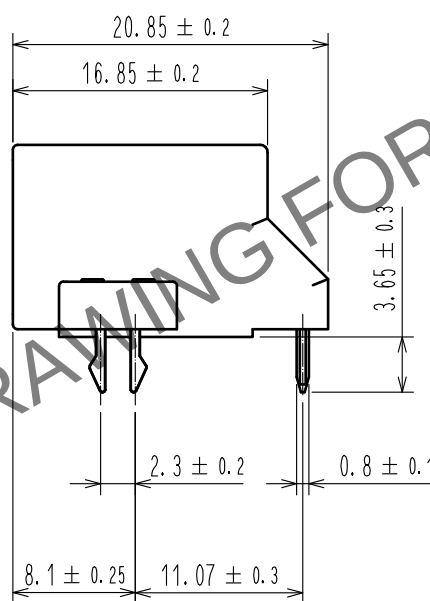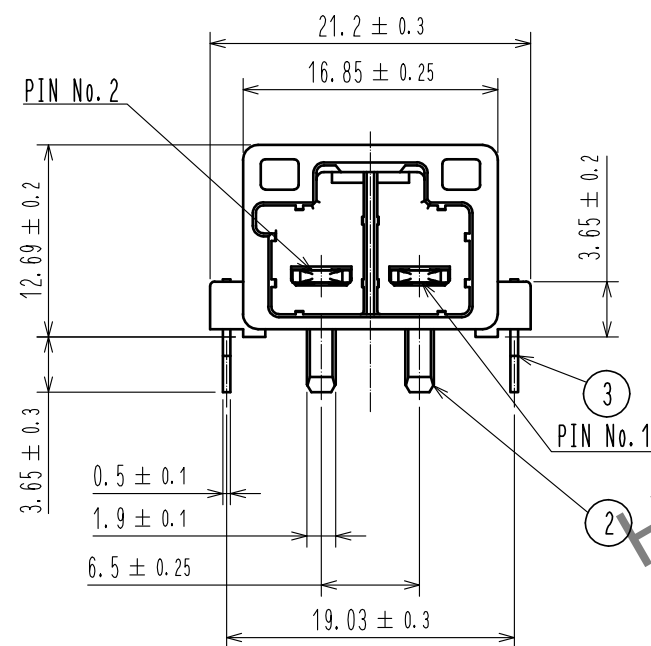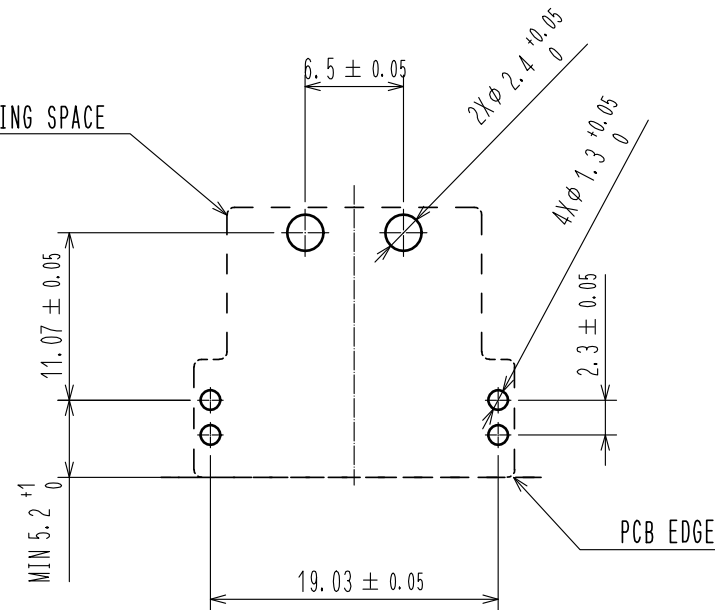


MATED CONNECTORS(1:1)

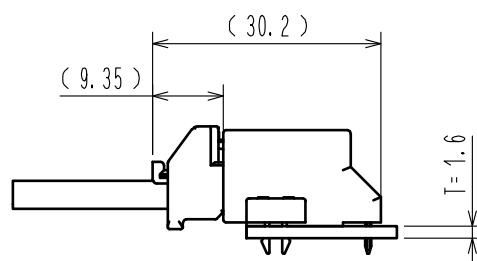


Packing specification


(1)After placing parts in trays, stack in six layers. (Top layer will be empty.)

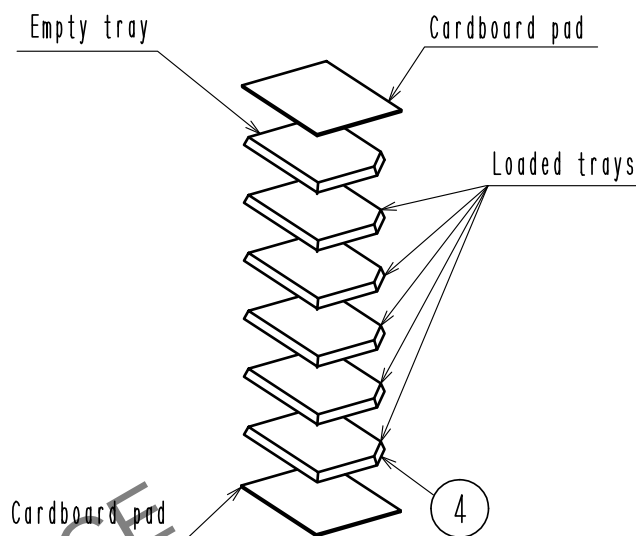

(2)Put the bound tray ×2 to cardboard box.

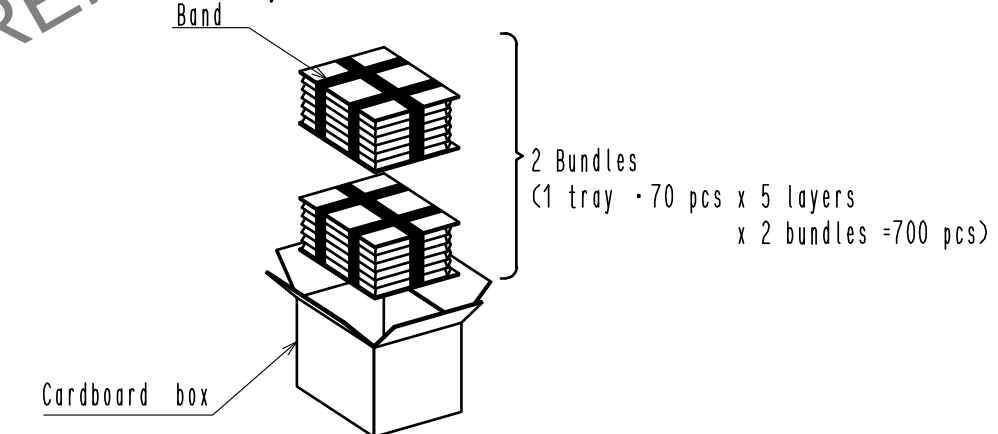

(3)Place lid on box and seal with packing tape.

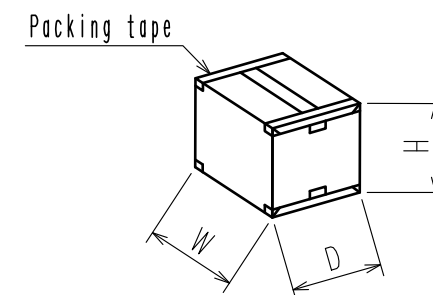

W=(368)mm
D=(278)mm
H=(261)mm

△ Drawing dimensions added.

2	COPPER ALLOY	UNDER PLATING:NICKEL PLATING 0.5μm min. SURFACE :TIN PLATING 1μm min.	4	POLYSTYRENE	
1	PA	BLACK, UL94V-0	3	PHOSPHOR BRONZE	UNDER PLATING:NICKEL PLATING 0.5μm min. SURFACE :TIN PLATING 1μm min.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00005960	DESIGNED TS. SHIMIZU
				CHECKED OM. MIYAMOTO	DATE 20200319
APPROVED : HK. UMEHARA 20190531				DRAWING NO. EDC-382040-00-00	
CHECKED : YH. MAMADA 20190531				PART NO. HVH-280-2P-6.5DS	
DESIGNED : TS. SHIMIZU 20190530				CODE NO. CL778-0703-0-00	
DRAWN : DS. HIROWATARI 20190528					

HRS HIROSE ELECTRIC CO., LTD.