

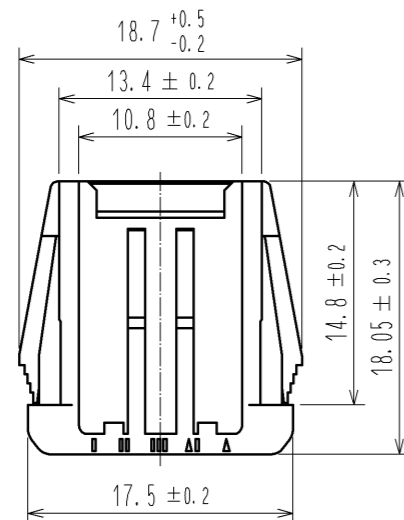
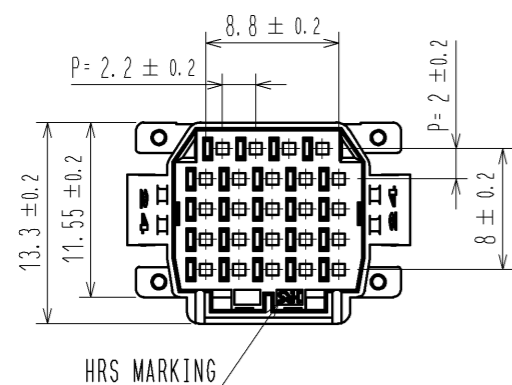



Mar.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





NUMBER OF POS.

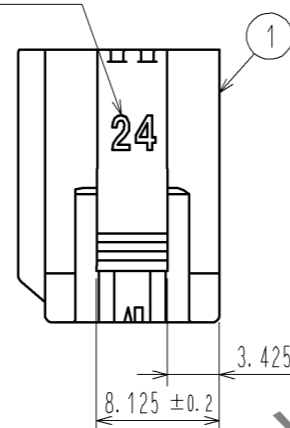


7 MATING FIGURE (PANEL MOUNTED)

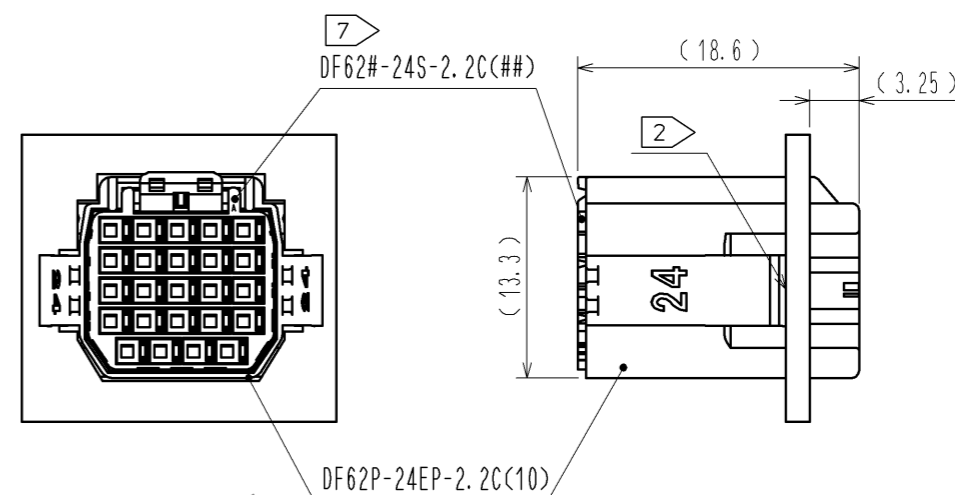

3 RECOMMENDED PANEL CUTOUT DIMENSION

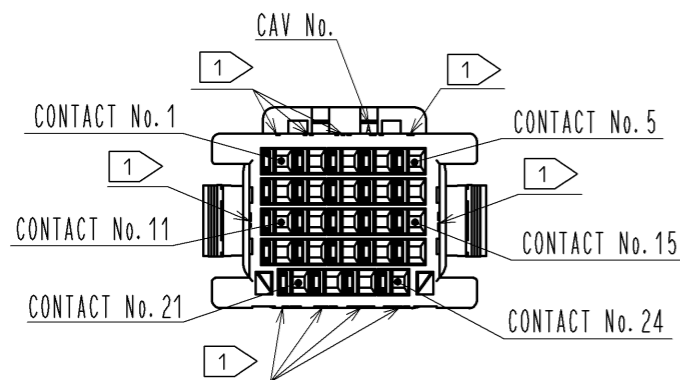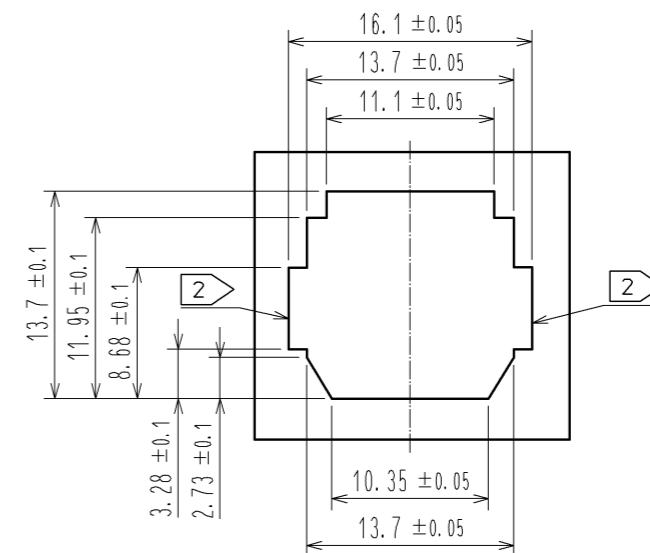

1 FIGURE-1 CONTACT No. MARKING (10:1)

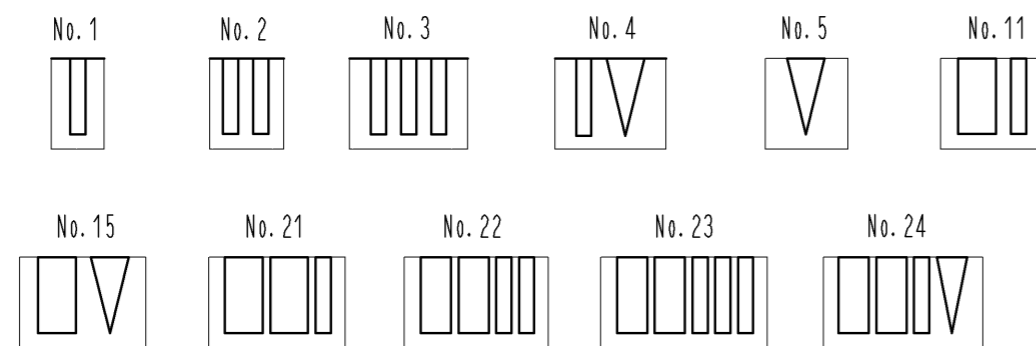

- NOTE. 1 MARKINGS AT THE INDICATED POSITIONS ARE CONTACT NO. MARKING. AND SHAPES ARE SHOWN IN FIGURE-1.
- 2 PLEASE USE THE NON-RADIUS SIDE FOR THE PANEL HOOKING AREA.
- 3 APPLICABLE PANEL THICKENING IS 2.3 TO 0.5mm.
- 4 CONSULT HIROSE FOR THE OTHER PANEL CUTOUT DESIGNS THAN THE RECOMMENDED ONE.
- 5. PER PACK : 100 PIECES.
- 6. THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
- 7 THIS FIGURE SHOWS THE MATED CONDITION WITH DF62B-24S-2.2C.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
				1	PBT		UL94V-0<WHITE>	
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	14. 03. 10	DRAWING NO. EDC3-349142-01		
				CHECED : HK. UMEHARA	14. 03. 10	PART NO. DF62P-24EP-2.2C(10)		
				DESIGNED : TS. KUMAZAWA	14. 03. 07	CODE NO. CL544-0550-7-10		
				DRAWN : TS. KUMAZAWA	14. 03. 07			1/1