


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

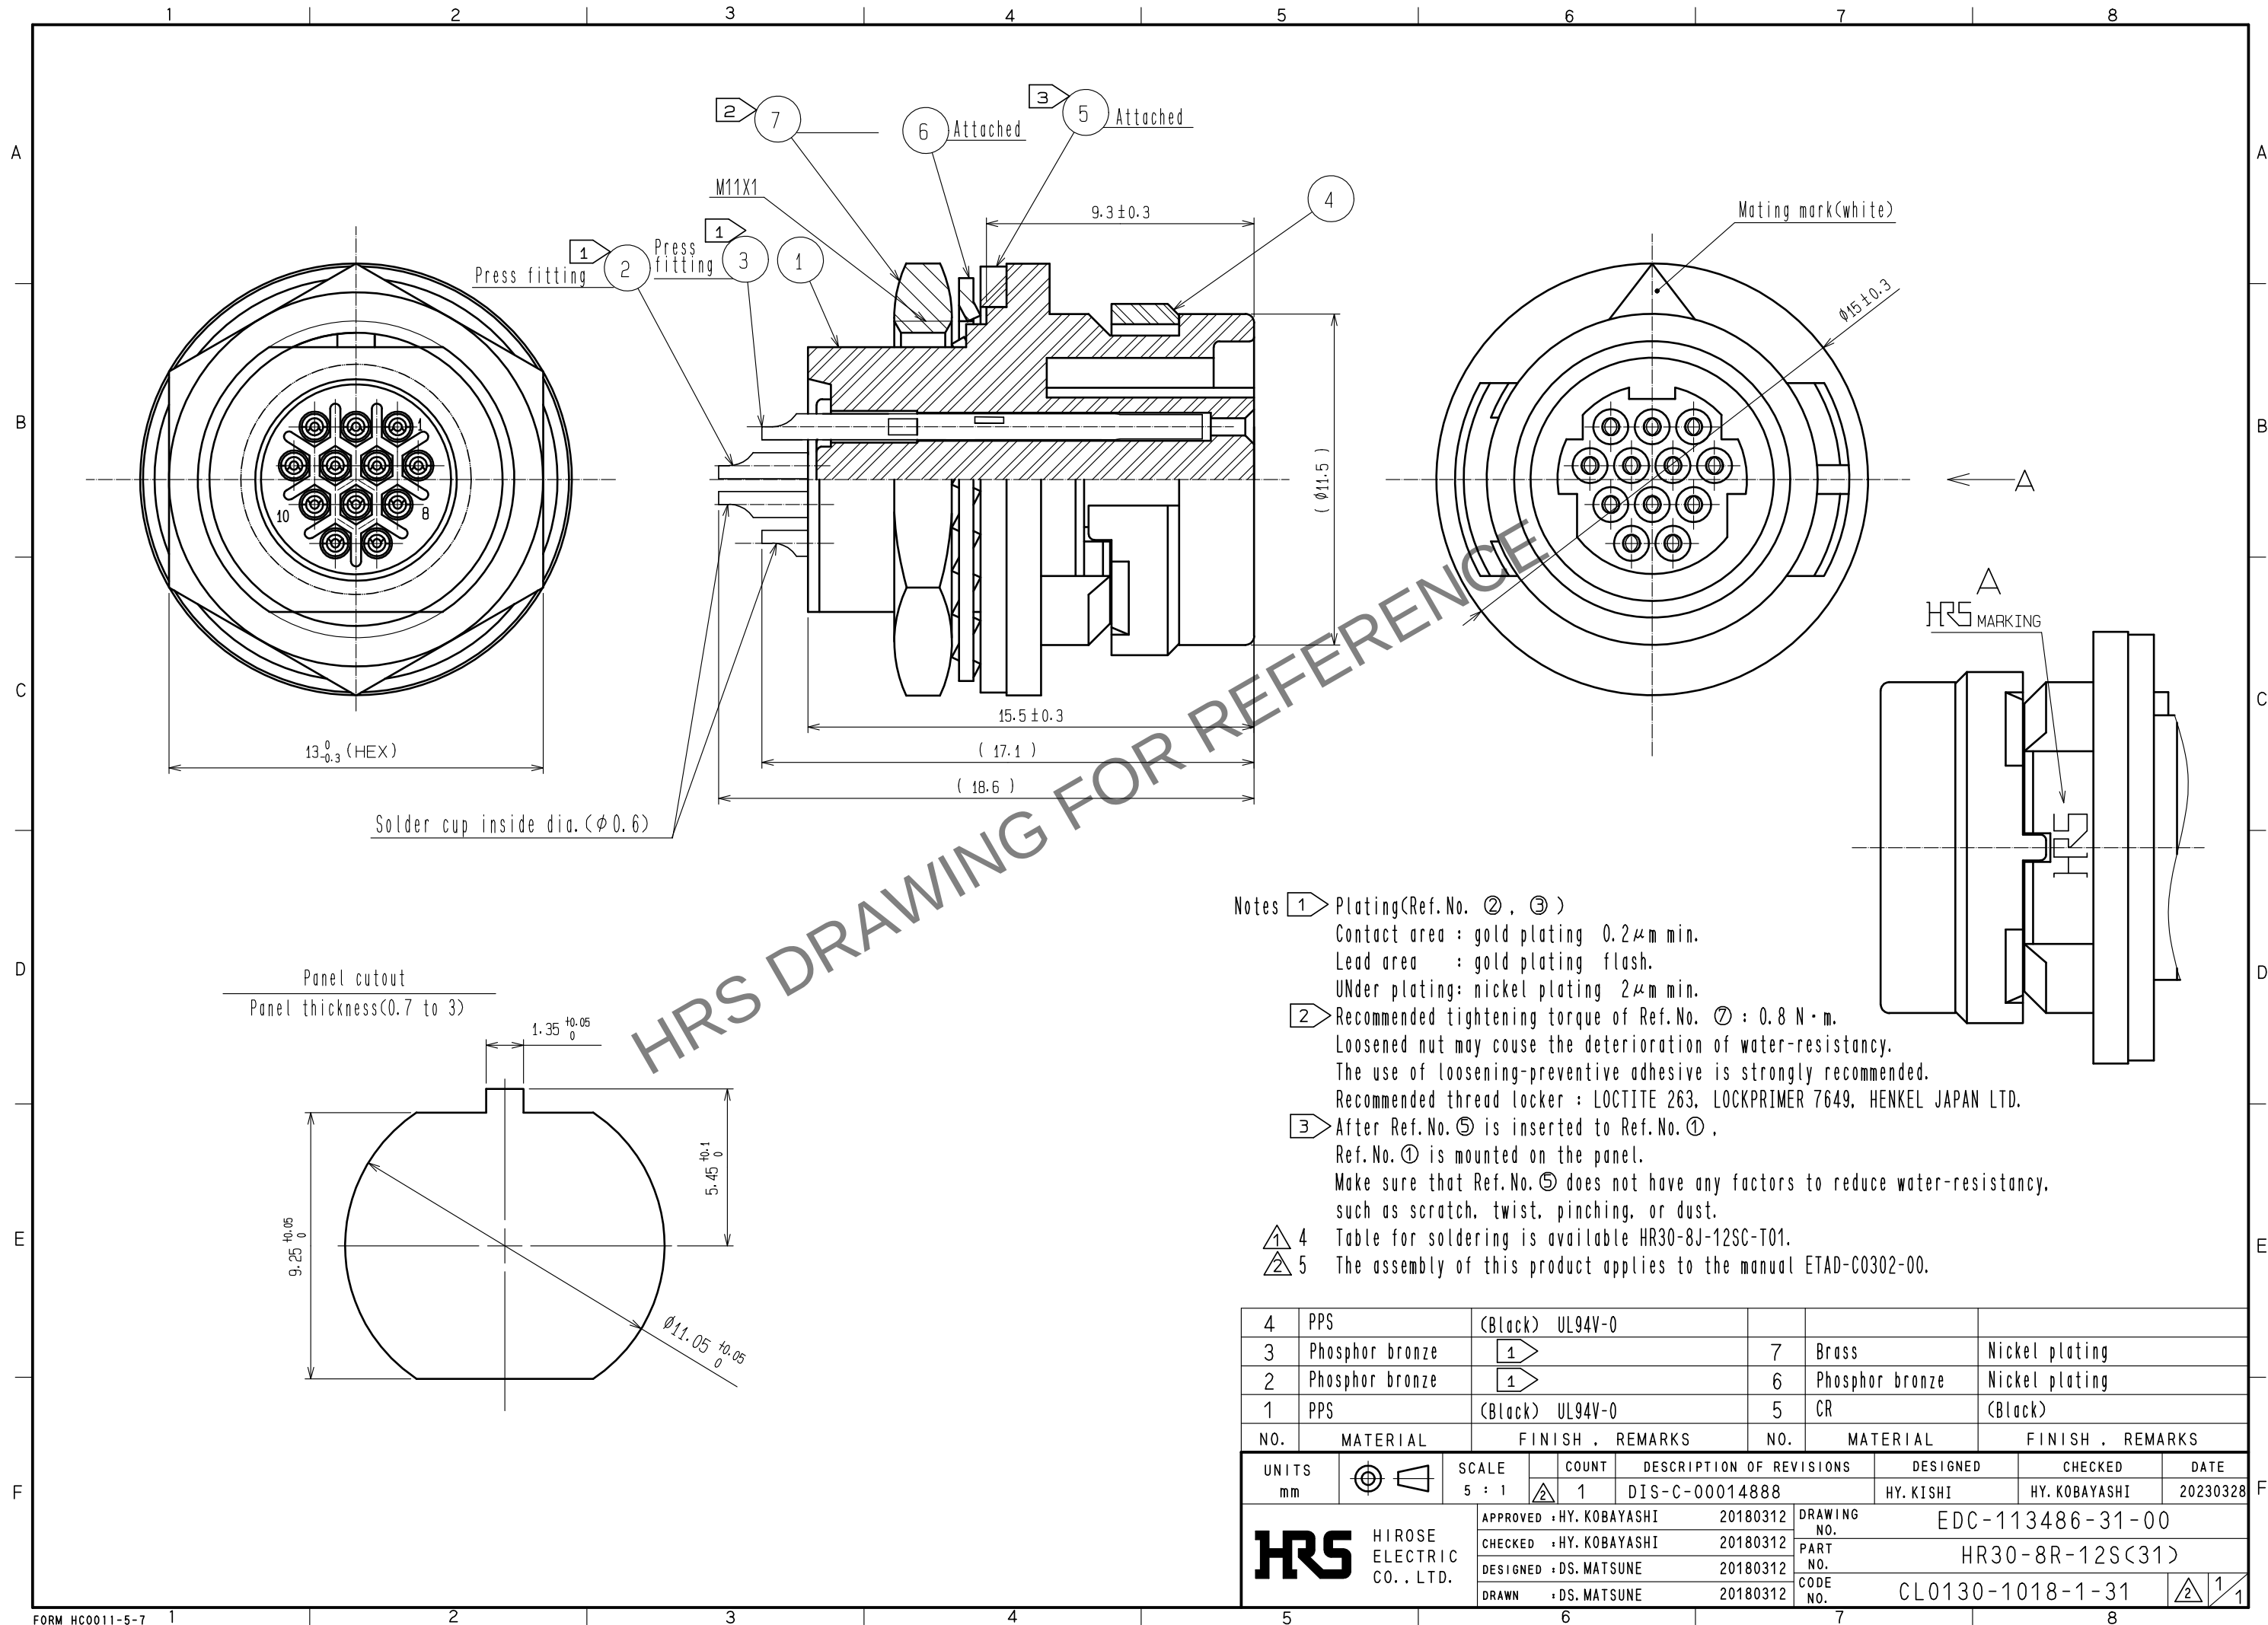

- Notes
- ① Plating(Ref. No. ②, ③)
Contact area : gold plating 0.2μm min.
Lead area : gold plating flash.
Under plating: nickel plating 2μm min.
 - ② Recommended tightening torque of Ref. No. ⑦ : 0.8 N·m.
Loosened nut may cause the deterioration of water-resistance.
The use of loosening-preventive adhesive is strongly recommended.
Recommended thread locker : LOCTITE 263, LOCKPRIMER 7649, HENKEL JAPAN LTD.
 - ③ After Ref. No. ⑤ is inserted to Ref. No. ①,
Ref. No. ① is mounted on the panel.
Make sure that Ref. No. ⑤ does not have any factors to reduce water-resistance,
such as scratch, twist, pinching, or dust.
- ④ 4 Table for soldering is available HR30-8J-12SC-T01.
⑤ 5 The assembly of this product applies to the manual ETAD-C0302-00.

4	PPS	(Black) UL94V-0			
3	Phosphor bronze	①	7	Brass	Nickel plating
2	Phosphor bronze	①	6	Phosphor bronze	Nickel plating
1	PPS	(Black) UL94V-0	5	CR	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00014888	DESIGNED HY. KISHI
HIROSE ELECTRIC CO., LTD.				APPROVED : HY. KOBAYASHI	20180312
				CHECKED : HY. KOBAYASHI	20180312
				DESIGNED : DS. MATSUNE	20180312
				DRAWN : DS. MATSUNE	20180312
				DRAWING NO. EDC-113486-31-00	
				PART NO. HR30-8R-12SC(31)	
				CODE NO. CL0130-1018-1-31	② 1/1