

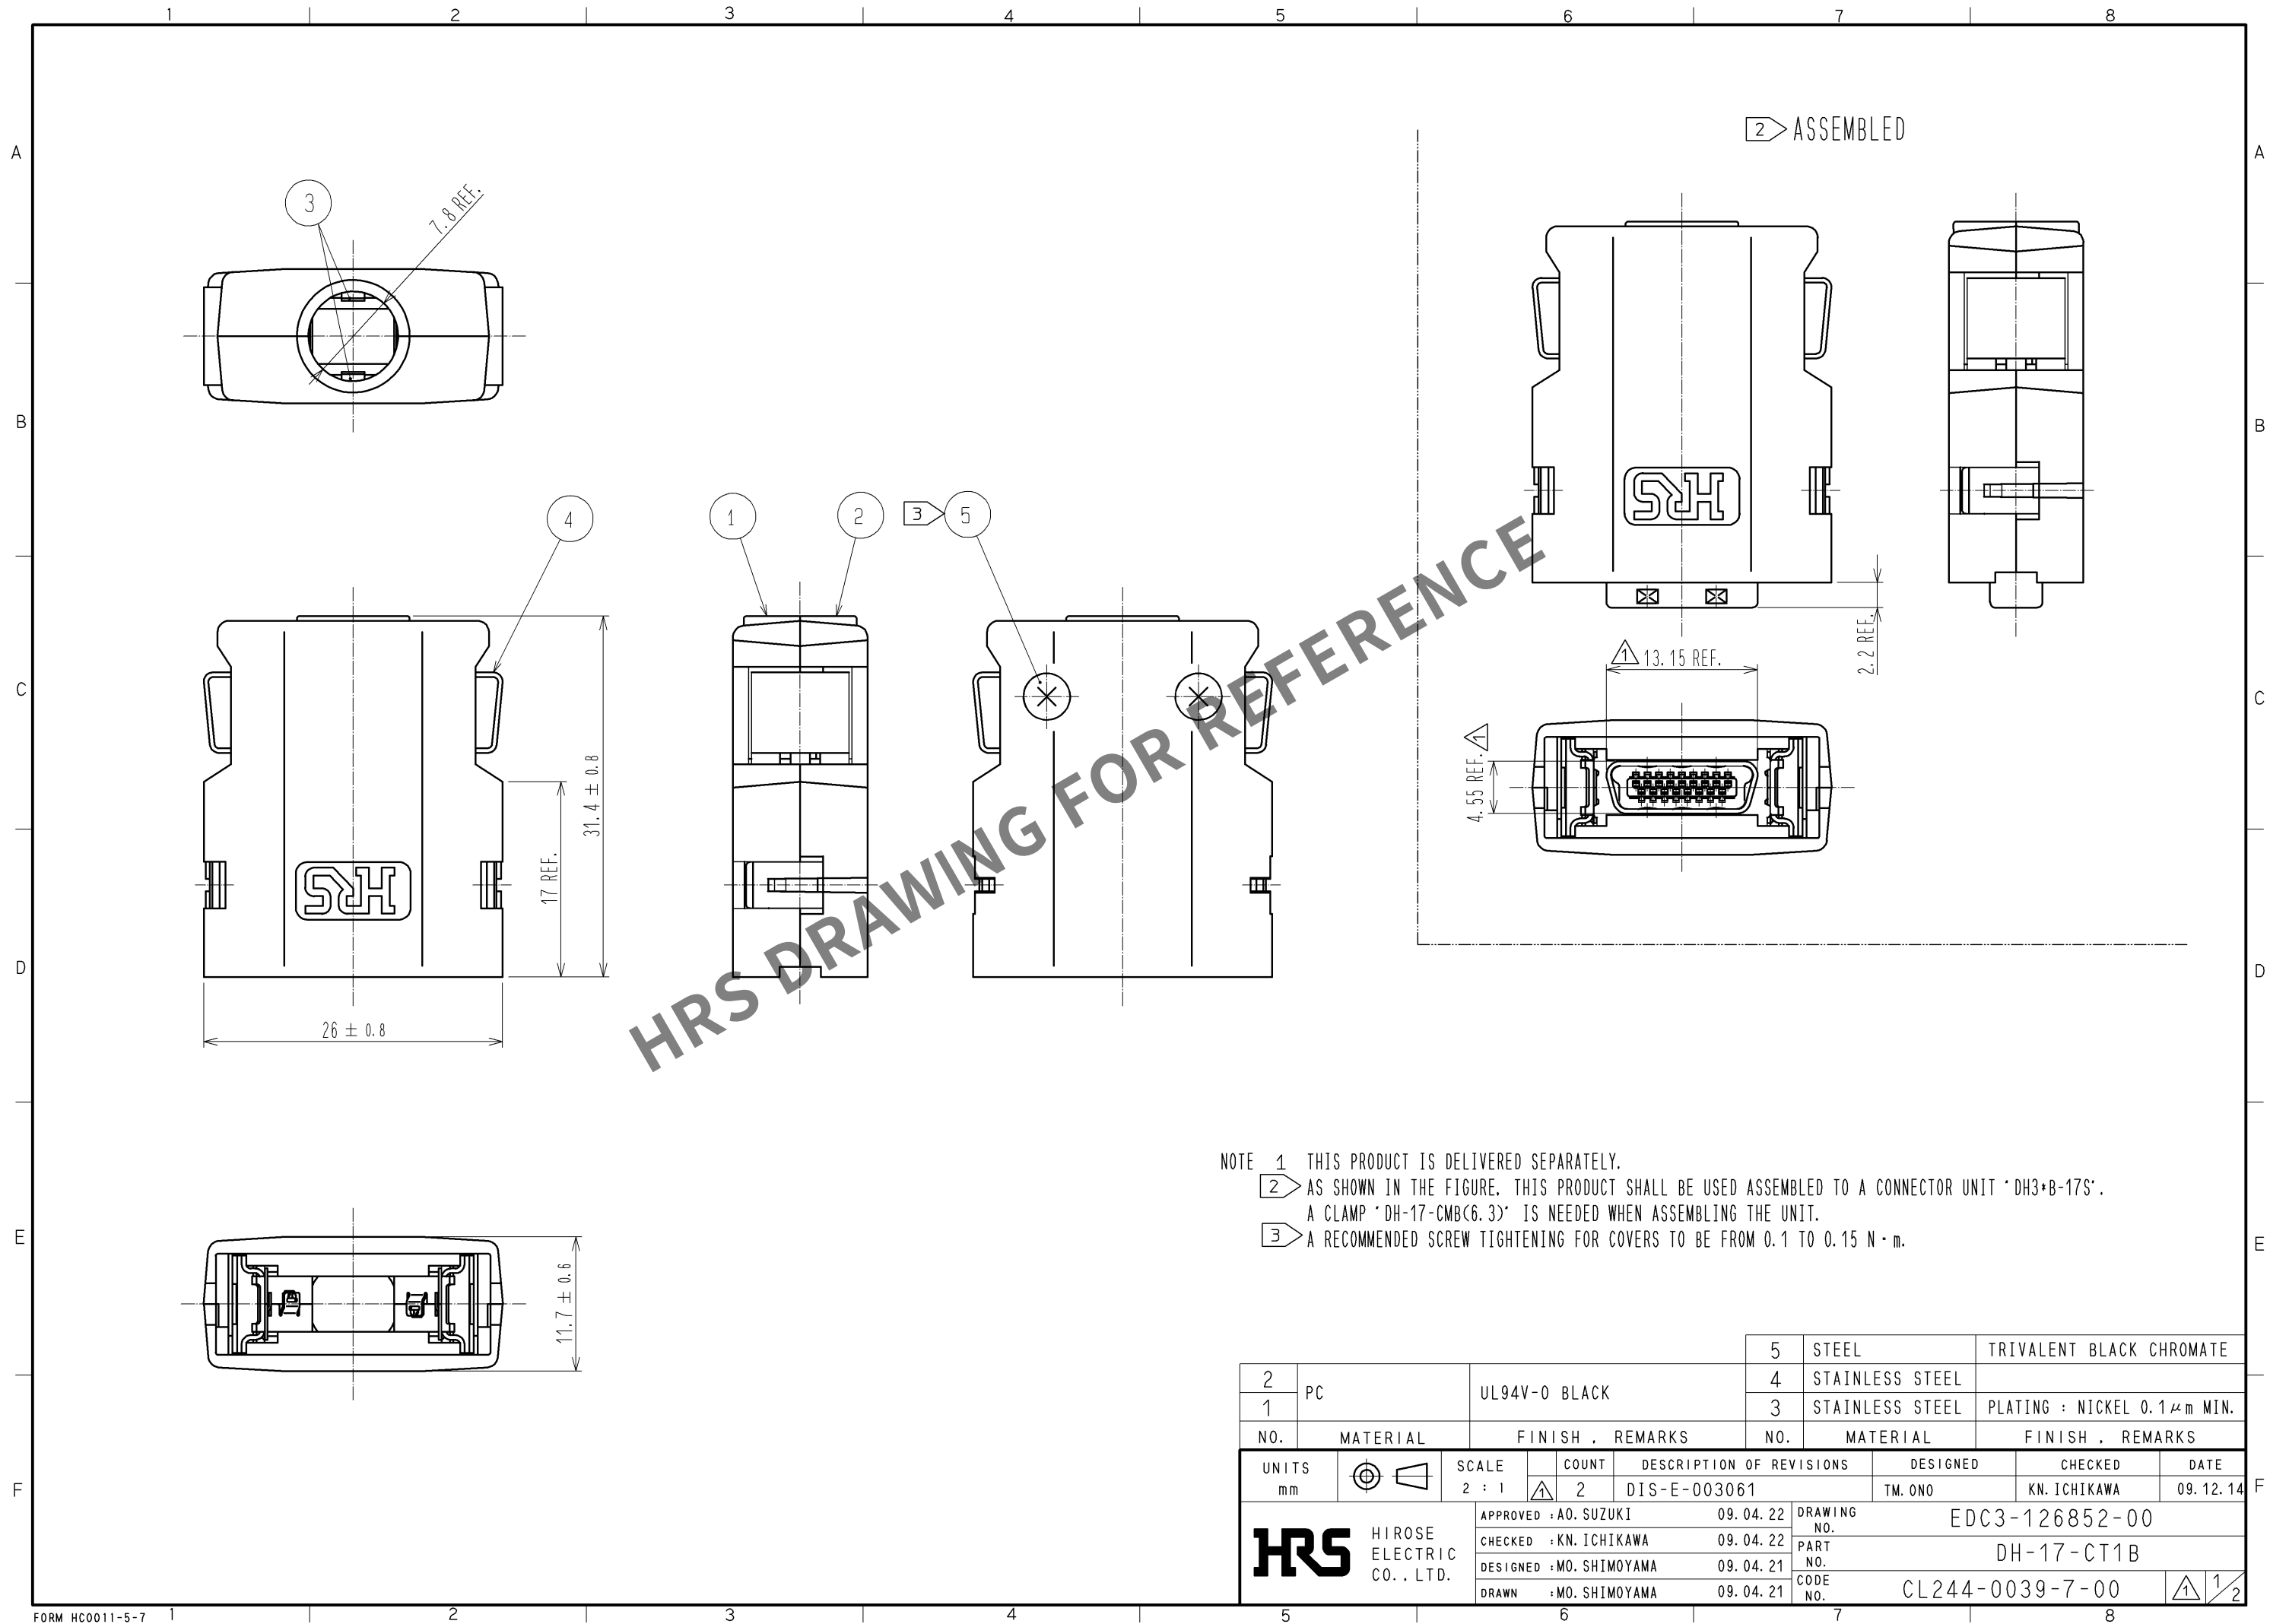




NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3+B-17S'.
A CLAMP 'DH-17-CMB(6.3)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

2		PC		UL94V-0 BLACK		5	STEEL		TRIVALENT BLACK CHROMATE		
1						4	STAINLESS STEEL				
						3	STAINLESS STEEL		PLATING : NICKEL 0.1μm MIN.		
NO.		MATERIAL		FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS		
UNITS mm				SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-E-003061		DESIGNED TM. ONO	CHECKED KN. ICHIKAWA	DATE 09. 12. 14
 HIROSE ELECTRIC CO., LTD.				APPROVED : AO. SUZUKI		09. 04. 22	DRAWING NO.		EDC3-126852-00		
				CHECKED : KN. ICHIKAWA		09. 04. 22	PART NO.		DH-17-CT1B		
				DESIGNED : MO. SHIMOYAMA		09. 04. 21	CODE NO.		CL244-0039-7-00		
				DRAWN : MO. SHIMOYAMA		09. 04. 21					
											

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

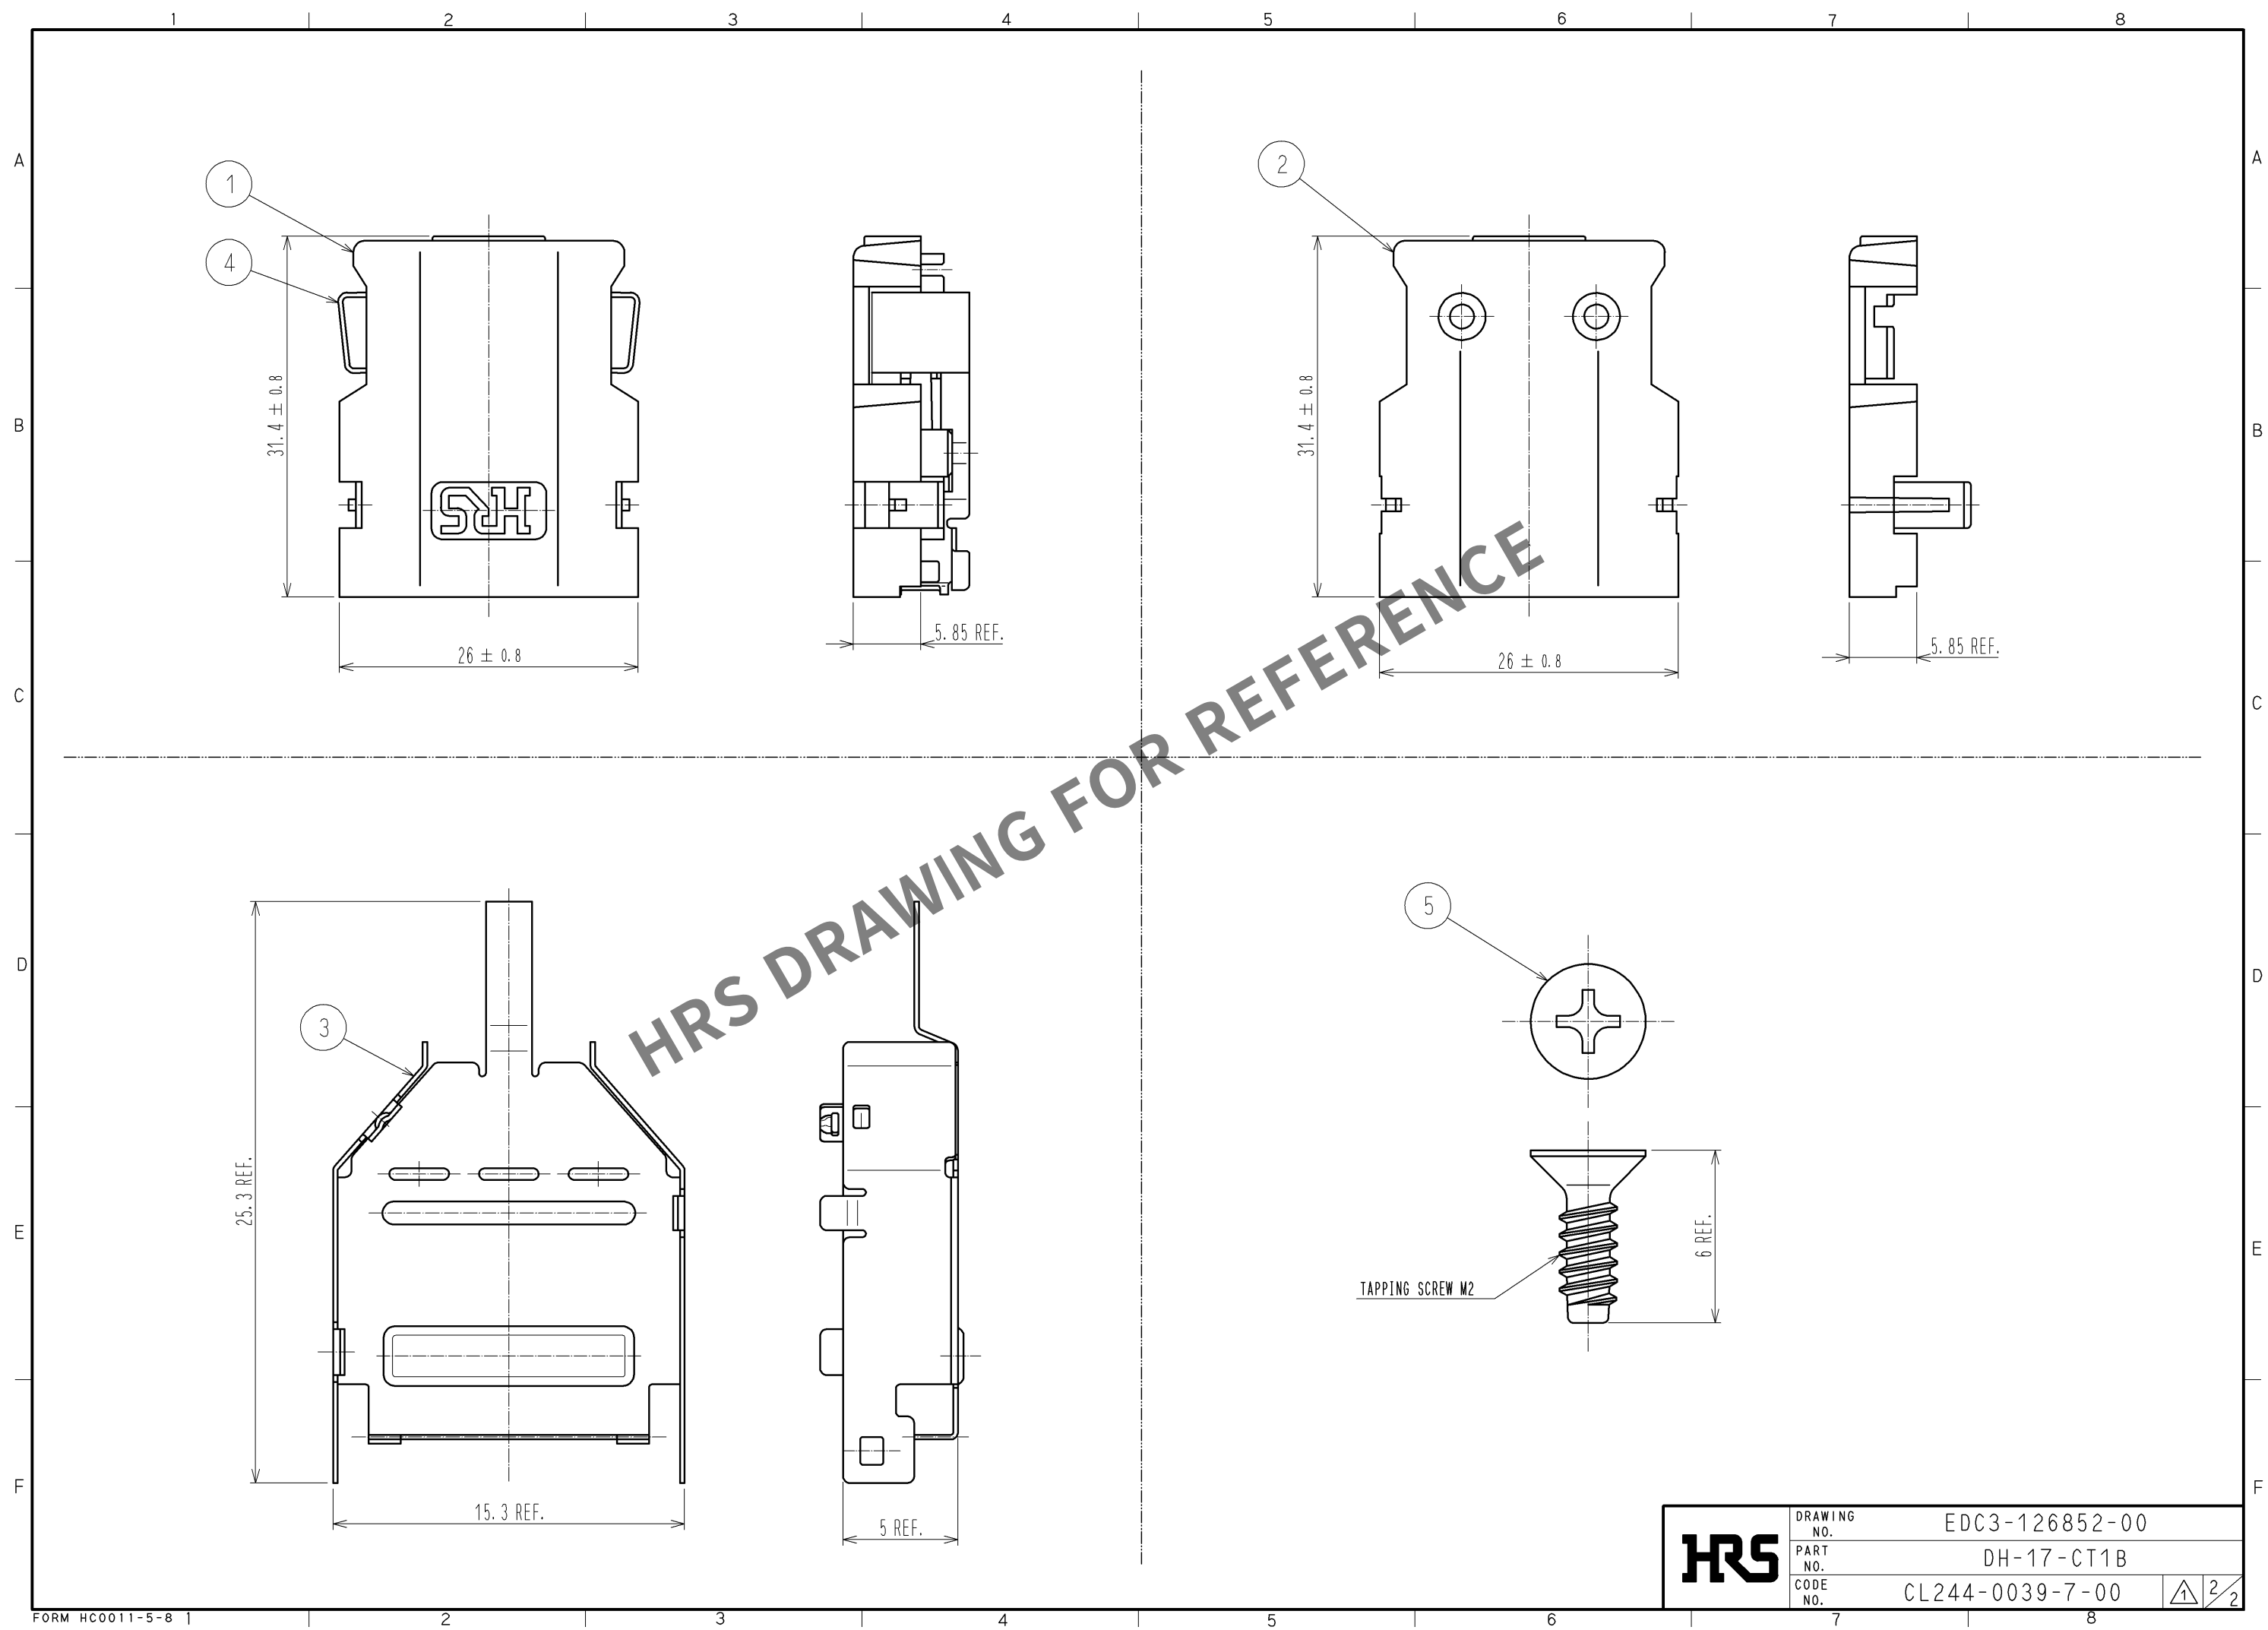

HRS	DRAWING NO.	EDC3-126852-00	
	PART NO.	DH-17-CT1B	
	CODE NO.	CL244-0039-7-00	2/2