
Procedures for using the Crimp Terminal Extracting Tool							
Extracting Tool Name DF-C-PO(A)							
Applicable Crimp Terminals	■DF1B-****SCF(A)	■DF3-***SC(F)(C)					
Applicable Cliffly Terminals	■DF1B-R**PR(F)	■ DF3-EP2428PC(F)(A)					

■ Procedures (e. g.) DF3-*S-2C, DF3-2428SCF

Insert the tip of the extraction tool along the lance groove of the housing until it hits the terminal lance. Hold both the tool and wire and pull them out together.

(Note 1) Please note that forcibly inserting or prying the tool may damage the housing lance or deform the terminals.

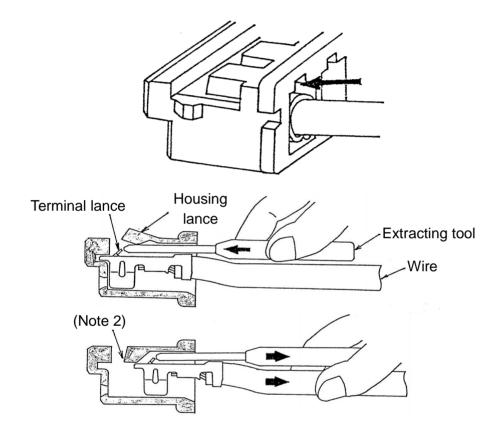

(Note 2) If you notice that the tip of the housing lance has scraped away when you pulled the terminal out, do not reuse the connector.

(Note 3) After you remove the terminal, the housing lance remains lifted and does not go back then, do not reuse the connector.

	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED			DATE		
⚠	0								
TITLE					HIROSE ELECTRIC CO., LTD.				
DF-C-P0 (A)			APPROVED		SJ. OKAMURA		20210413		
Procedures for Using the Crimp Terminal Extracting Tool				CHECKED		SZ. ONO		20210413	
				DESIGNED		SN. MIWA		20210413	
					WRITTEN KT. NUI			20210413	
		TECHICAL SPECIFICATION	_	ETAD-H1019-00			Δ	1/1	