

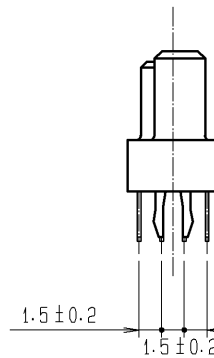
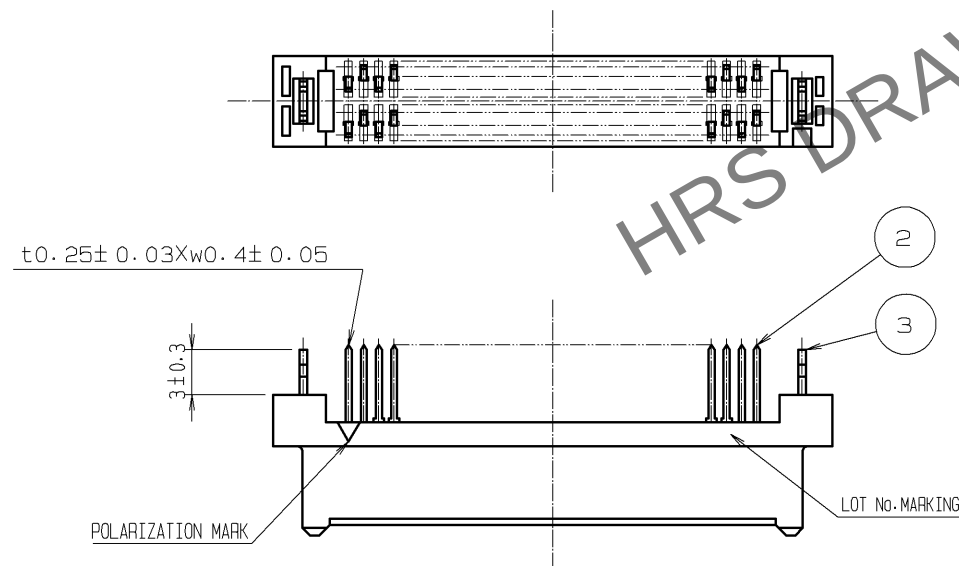
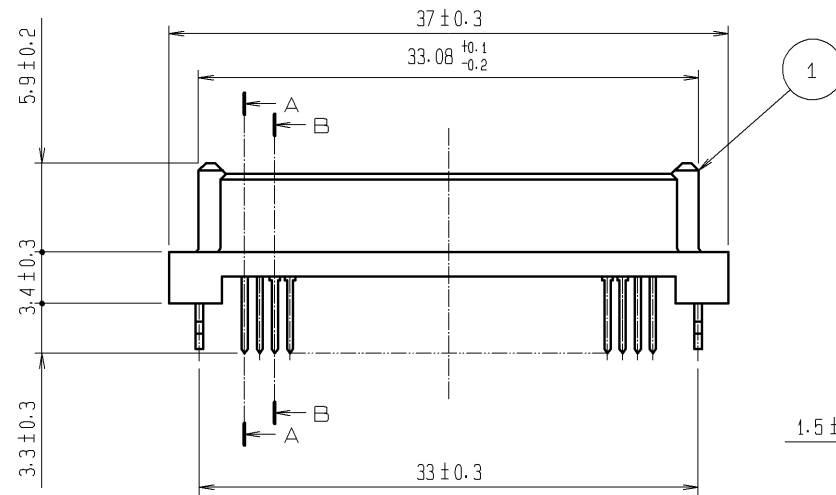


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

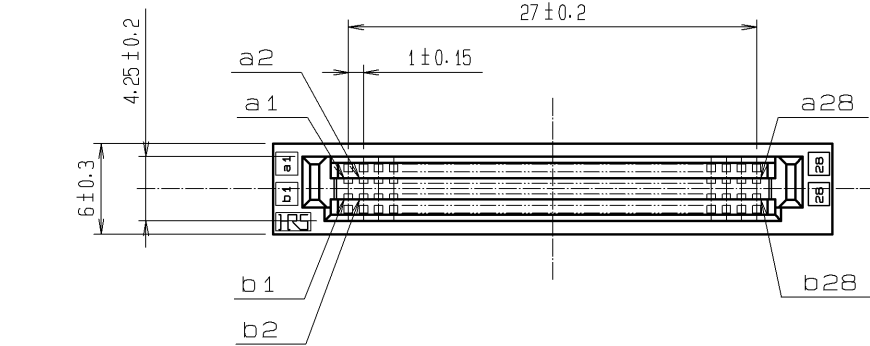

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)
APPLICABLE BOARD THICKNESS: 1.6

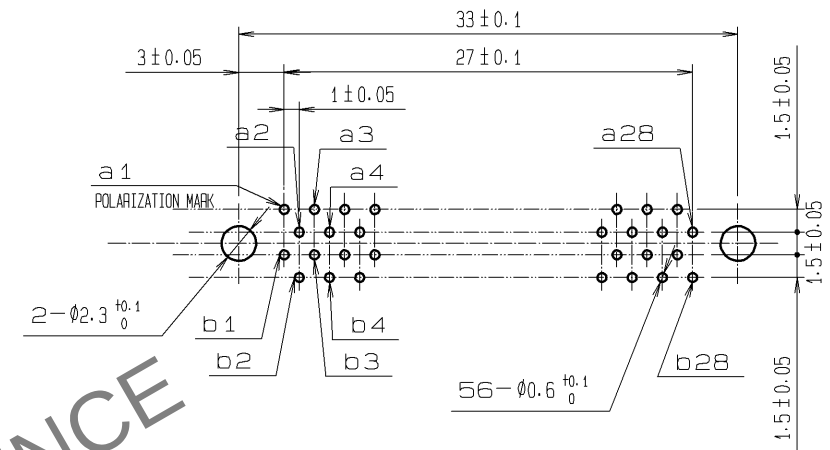



CONTACT SEQUENCE

SEQUENCE	PIN NO.
1	a1, a2, a27, a28 b1, b2, b27, b28
2	a3~a26 b3~b26

A-A (5:1)

B-B (5:1)

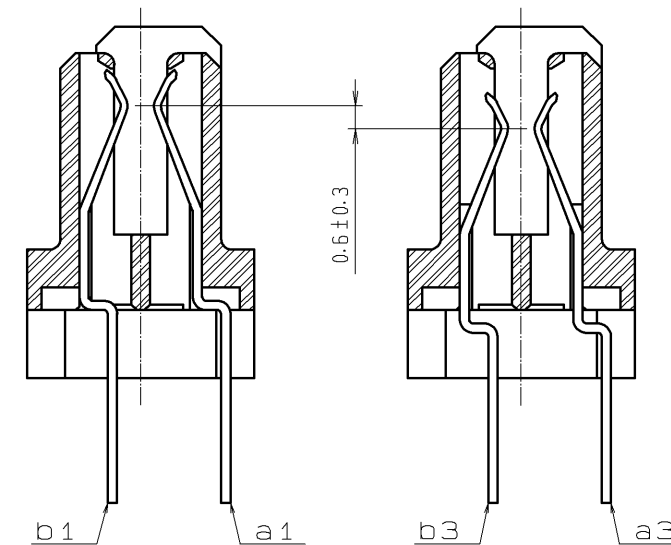

3	PHOSPHOR BRONZE	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.				
1	POLYAMIDE	BEIGE UL94V-0			LEAD AREA : TIN-PLATING 1.2μm min.				
					UNDER PLATING : NICKEL 1μm min.				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		08.07.14	DRAWING NO. EDC3-151420-21				
		CHECKED : HT. YAMAGUCHI		08.07.14	PART NO. FX5-56S2A-DSAL(71)				
		DESIGNED : SY. KAMIGA		08.07.11	CODE NO. CL575-0127-5-71				
		DRAWN : HK. SUNADORI		08.06.19					
									