
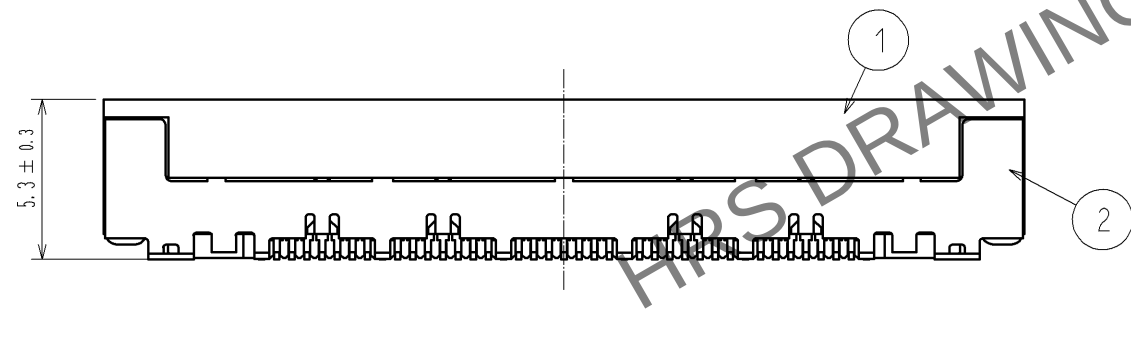
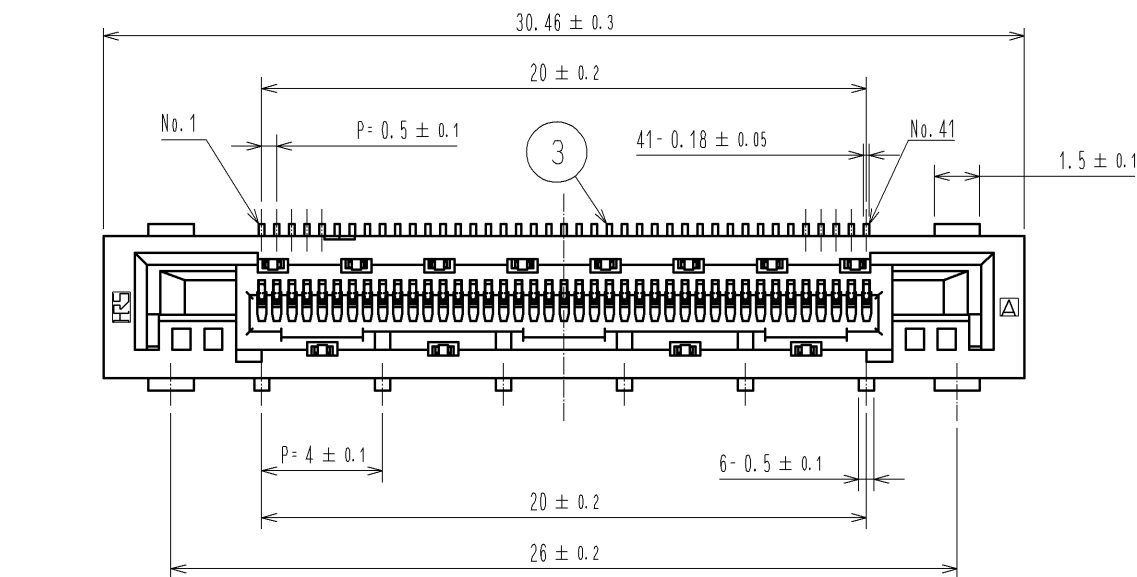
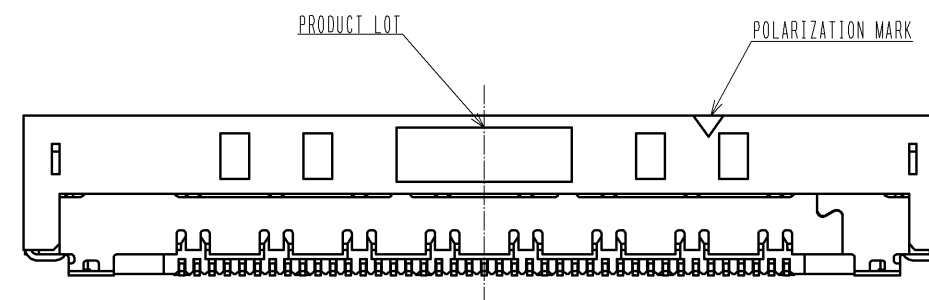


RECOMMENDED LAND PATTERN DIMENSION
(METAL MASK THICKNESS: $t=0.12$)

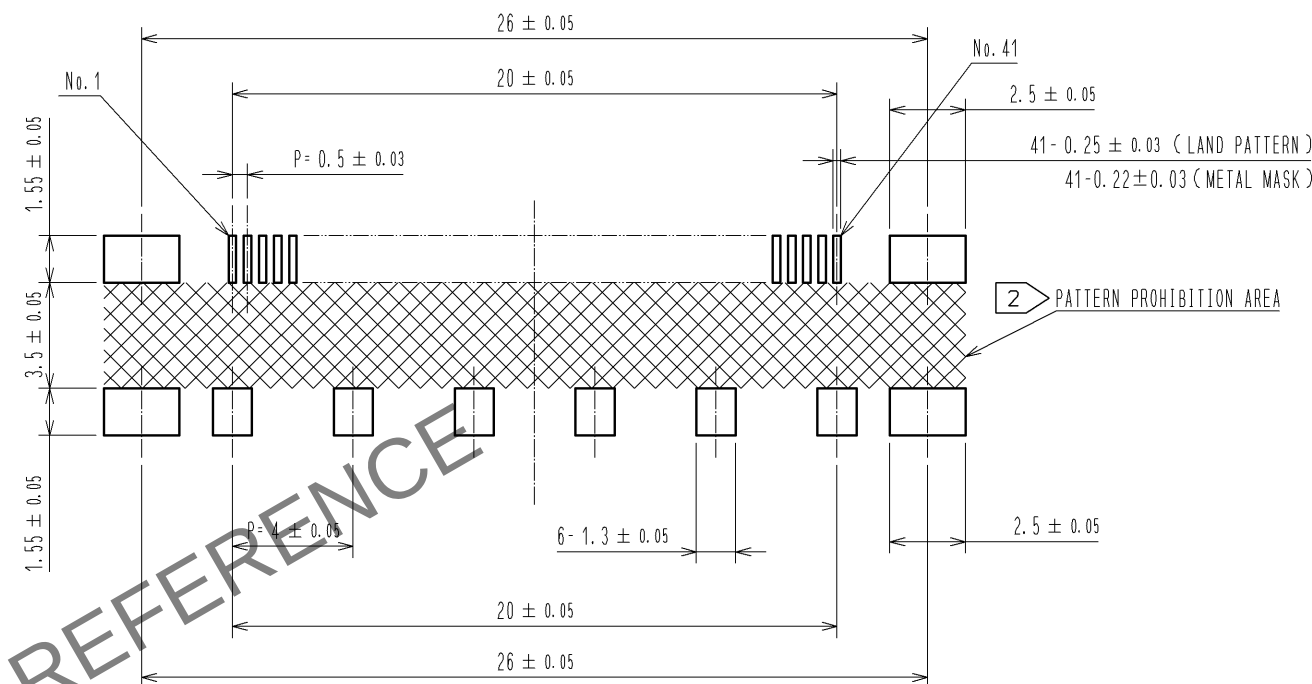

- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
3 () INDICATES A REFERENCE DIMENSION.
4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.


3	PHOSPHOR BRONZE	CONTACT AREA: GOLD $0.1 \mu\text{m}$ min.	6	PI	TAPE FOR VACUUM PICK UP
		LEAD AREA: GOLD $0.03 \mu\text{m}$ min.	5	PE	COVER TAPE
		UNDER PLATING: NICKEL $1 \mu\text{m}$ min.	4	PS	EMBOSSED CARRIER TAPE
1	PA	BLACK, UL94V-0	2	BRASS	OVER PLATING: TIN PLATING $1 \mu\text{m}$ min. UNDER PLATING: NICKEL $2 \mu\text{m}$ min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 4 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-005350	DESIGNED KN. SHIBUYA
		APPROVED : HS. OKAWA	10.03.09	DRAWING NO.	EDC3-330389-00
		CHECKED : HT. YAMAGUCHI	10.03.09	PART NO.	FX16M2-41S-0.5SV
		DESIGNED : TP. MATSUMOTO	10.03.08	CODE NO.	CL575-3002-6-00
		DRAWN : TP. MATSUMOTO	10.03.08		
		DATE	11.03.08		

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING (2:1)

REELED DIMENSION (FREE)

THE DIRECITON OF PULLING OUT

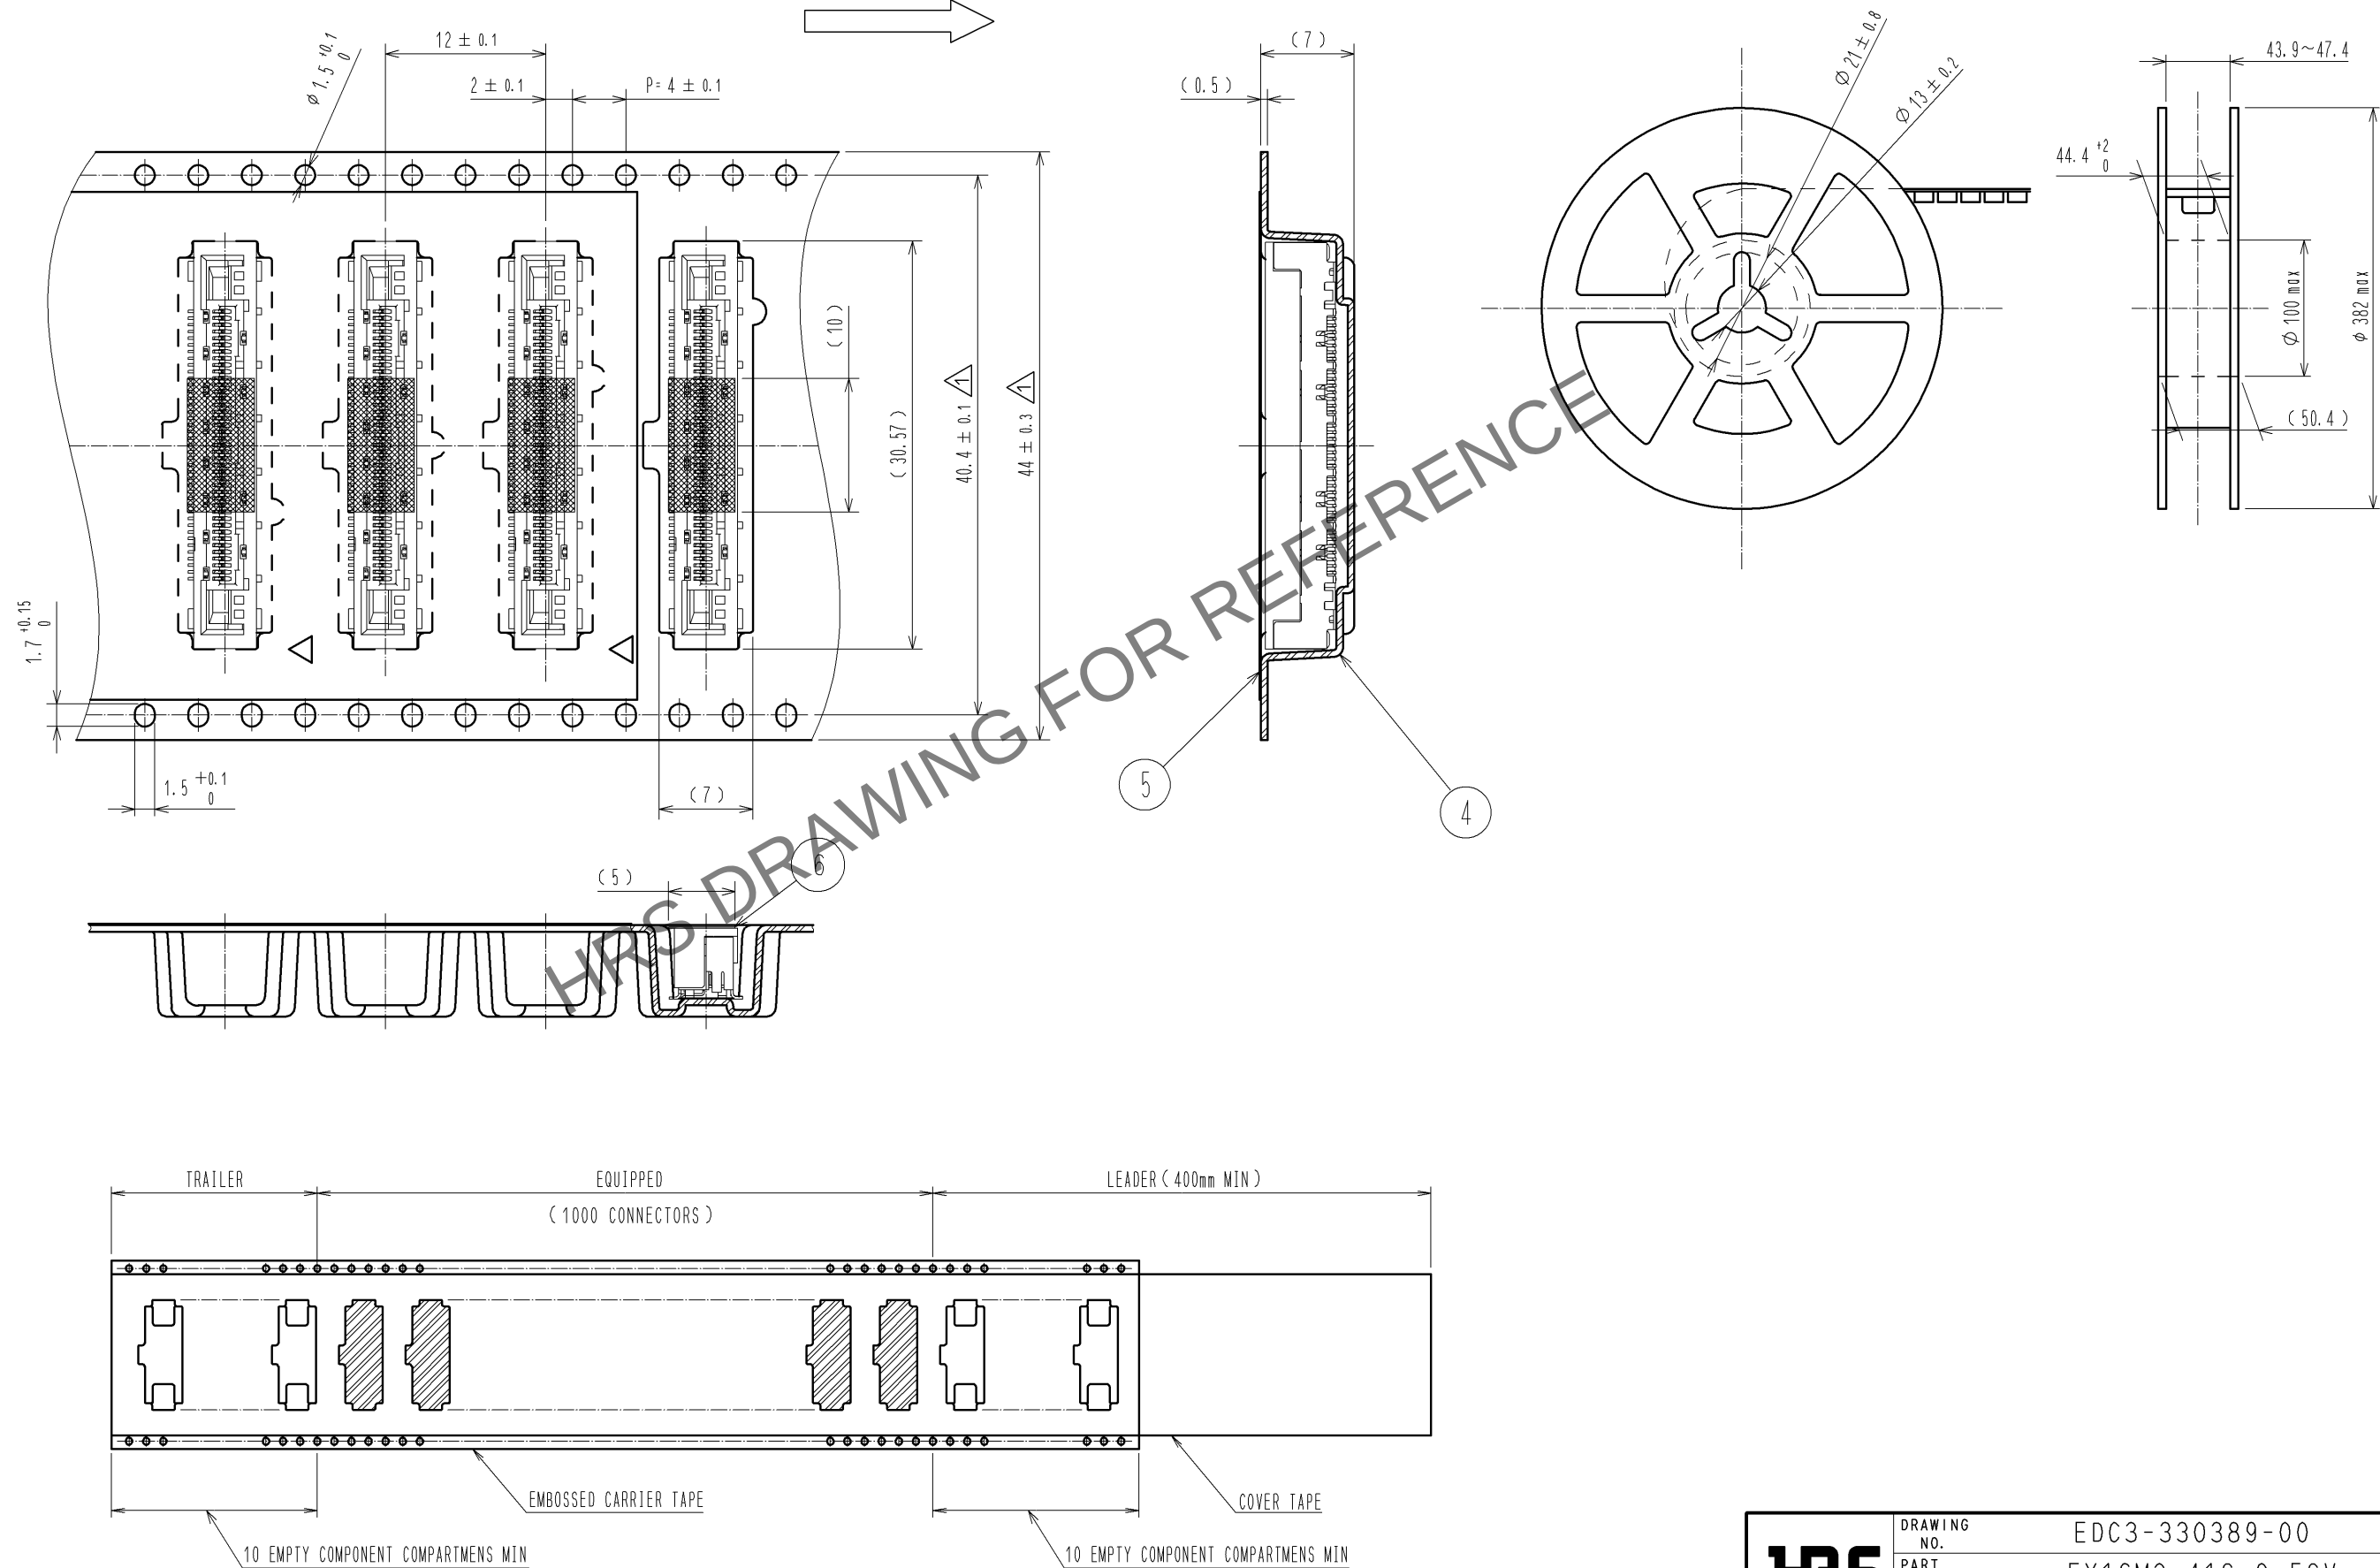

DRAWING NO.	EDC3-330389-00
PART NO.	FX16M2-41S-0.5SV
CODE NO.	CL575-3002-6-00

2/2